

Tuesday, March 14, 2017 11:43:38 AM © Copyright 2015 Opechee Construction Corporation MEMBRANE COUNTERFLASHING 24 GA. GRAVEL STOP/FLASHING WITH KYNAR COLORED FINISH. FASTEN ROOF FLANGE 12" O.C. WITH MIN. 1" GALV. ROOFING NAILS CONT. (2) 2x12 PLATE & (2) 1/2" F.R.T PLYWOOD. 22 GA. CONT. HOLD FASTEN WITH (3) ROWS OF #10 SCREWS AT MAX. 16" DOWN CLIP, FASTEN TO BLOCKING / @ 12" O.C. 5/8" FIRE TREATED PLYWOOD SHEATHING OVER LIGHT GAGE FRAMING W.R.B. TO WRAP UP AROUND AND BE SEALED BENEATH MECHANICALLY FASTENED ROOF MEMBRANE ROOF MEMBRANE 4" RIGID POLYISOCYANURATE INSULATION (R-26 ---PROVIDE SEALANT BETWEEN ROOF NOMINAL); MECHANICALLY FASTENED TO ROOF DECK FLASHING & MASONRY VENEER LIGHT GAGE METAL FRAMING PER LIGHT GAGE ENGINEER WITH INSULATION AT BASE OF WALL WEEP BAFFLE @ 24" O.C FILL VOID WITH BATT INSULATION (TYPICAL) -TOP OF BEAM
ELEV. = 165'-0" MASONRY VENEER WITH 3" METAL ROOF DECK STAINLESS STEEL 2 PIECE REFER TO STRUCTURAL ADJUSTABLE TIES @ 24" O.C. HORIZ AND 16" O.C VERT/ SECURELY ATTACHED TO STUDS 5/8" GYPSUM WALL BOARD - OVER 6 MIL. POLYETHYLENE STEEL BEAM; REFER TO VAPOR BARRIER (SHOWN STRUCTURAL DRAWINGS DASHED) Z-CLIP FRAMING @ 24" O.C. WITH PROVIDE BLOCKING FOR RIGID INSULATION - DRAPERY AT DRAPERY POCKET WEATHER RESISTANT BARRIER (SHOWN DASHED) -. SUSPENDED CEILING OVER 5/8" F.R.T. PLYWD. REFER TO CEILING PLANS SHEATHING **ROOF EAVE DETAIL** SCALE: 1 1/2" = 1'-0" SIXTH FLOOR
ELEV. = 154'-0" WEATHER-RESISTANT BARRIER OVER METAL FLASHING 6" METAL TRACK OVER PROVIDE SOLID SUPPORT FOR ALL. SILL SEAL INSUL. FLASHING WALL BASE & FLOOR MASONRY VENEER -FINISH. REFER TO FINISH SCHEDULE CONTINUOUS THROUGH WALL FLASHING W/ TERMINATION BAR EXTENDS 6" ABOVE MORTAR NET, FULL CAVITY DEPTH MORTAR NET OR EQUAL, WEEP BAFFLE @ 24" O.C., 3" STAINLESS STEEL DRIP PLATE SET IN A BED OF SEALANT LIPPED BRICK WITH COMPRESSIBLE FILLER ON TOP, SEALANT AND BACKER ROD BELOW DRIP PLATE. PROVIDE BLOCKING AT DRAPERY GALV, STEEL RELIEVING ANGLE. POCKET, TYP REFER TO STRUCTURAL DRAWINGS FILL CAVITY WITH Z-CLIP FRAMING @ 24" O.C. WITH BATT INSULATION RIGID INSULATION FIFTH FLOOR ELEV. = 144'-0" RELIEVING ANGLE DETAIL SCALE: 1 1/2" = 1'-0" PRECAST HEAD WEATHER-RESISTANT BARRIER ANCHOR SYSTEM DESIGN BY PRECAST W/ MANUFACTURER'S SEAM TAPE SUPPLIERS ENGINEER (TYP) FULL DEPTH MORTAR NET OR . APPROVED SELF-ADHERED FLEXIBLE WAY FLASHING, WEEP CHANNELS EQ., FLASHING EXTENDS 6" ABOVE MORTAR NET 16" O.C., WEEP BAFFLE @ PANEL ENDS., 3" STAIN ESS -LAP W.R.P OVER FLASHING STEEL DRIP PLATE SET IN BED OF SEALANT PROVIDE SOLID SUPPORT GALV. STEEL LINTEL,/ FOURTH FLOOR ELEV. = 134' - 0" FOR ALL SELF ADHERED REFER TO STRUCTURAL FLASHING DRAWINGS BACKER ROD & SEALANT ALUMINUM COMPOSITE PANEL 'ACM' -SYSTEM 2" x WOOD BLOCKING GALVANIZED/HAT CHANNEL FURRING (EXTEND 1-1/8" BEYOND FACE OF SHEATHING) INSTALL WAR.B. TO ENSURE A COMPLETE WEATHER PROVIDE TEAR AWAY BEAD AT AND AIR/TIGHT SEAL AROUND GWB AND WINDOW JOINT, TYP WINDØW UNIT PERIMETER SEALANT, SEAL TO PERMIETER WINDOW SEALANT W/_ BACKER ROD (AVOID FILLING THERMALLY BROKEN STOREFRONT WEEP HOLES) PRECAST PANEL JAMB BEYOND ~ STOREFRONT HEAD DETAIL SCALE: 1 1/2" = 1'-0" THIRD FLOOR
ELEV. = 124' - 0" PROVIDE BACKER ROD & SEALANT FULL PERIMETER OF STEEL KNIFE PLATE PENETRATION OF SPANDREL PANELS 5'-10" 5'-2" STEEL ROD, COLOR GALVANIZED -1/4" PER FT LAMINATED GLASS PANEL -STAINLESS STEEL DOUBLE ARM HEAVY-DUTY SPIDER FITTINGS (TYP) _ APPLY SEALANT UNDER BRACKET SUPPORTING STEEL STRUCTURE, MEMBER SIZES PER STRUCTURAL PLANS. COLOR GALVANIZED

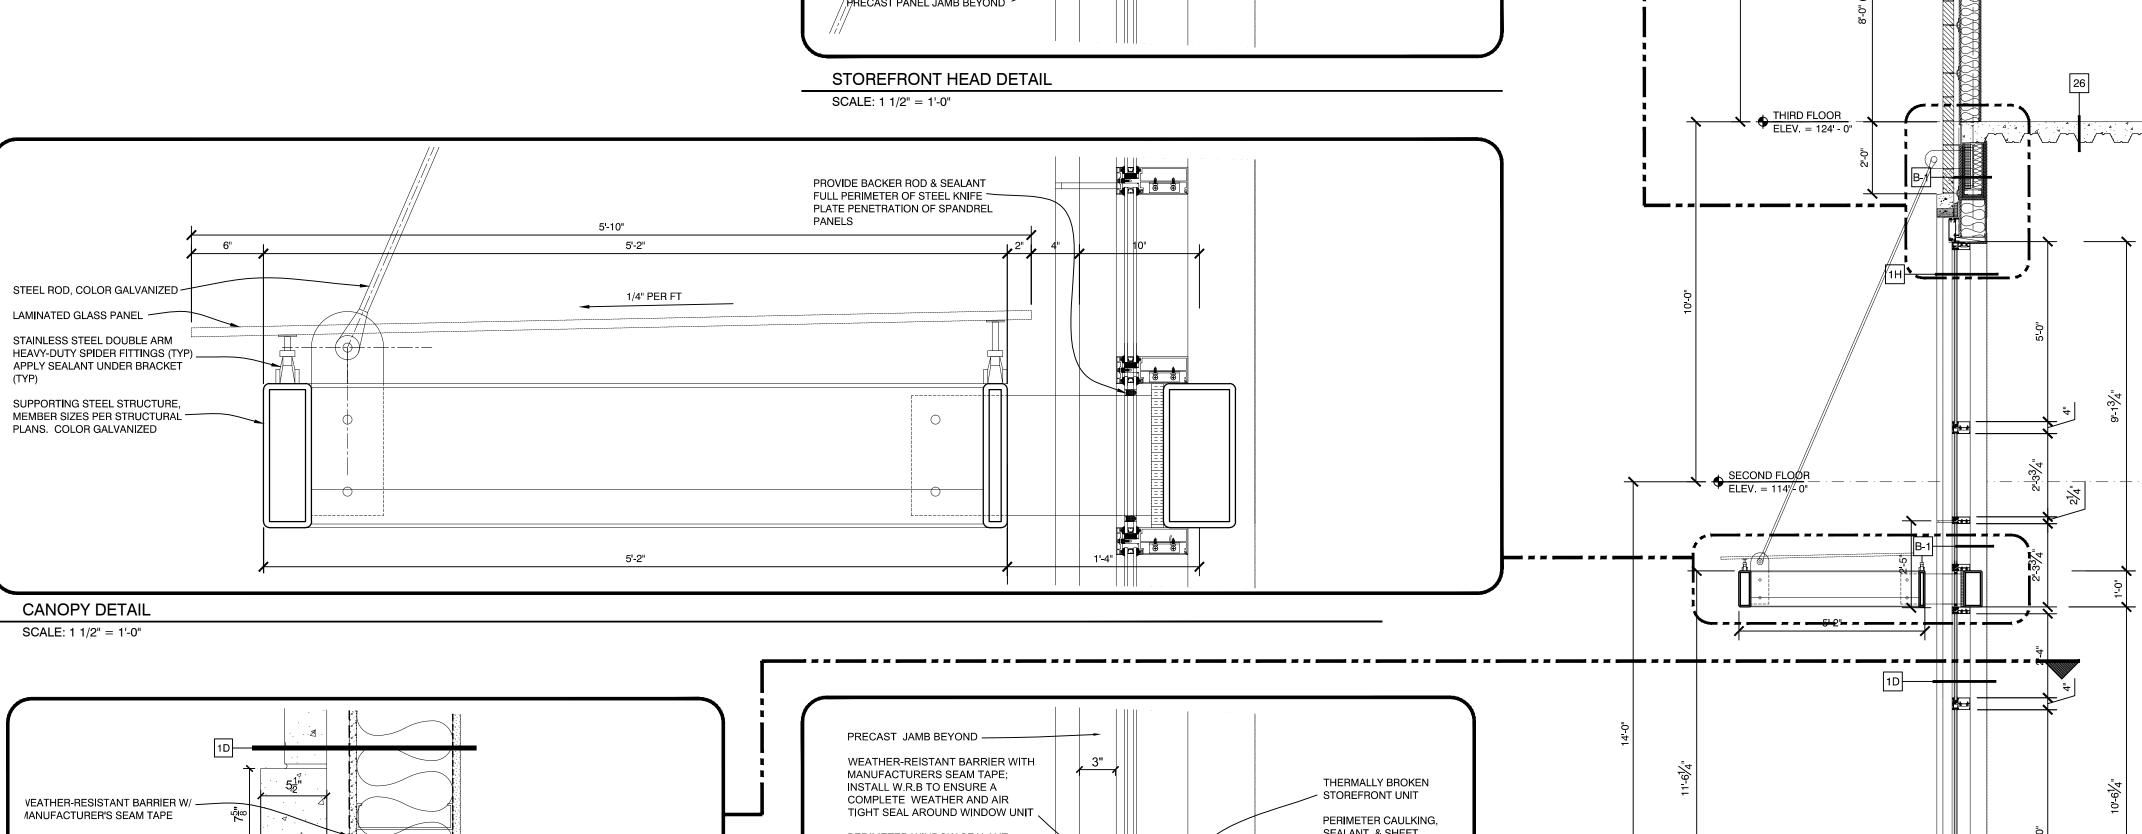

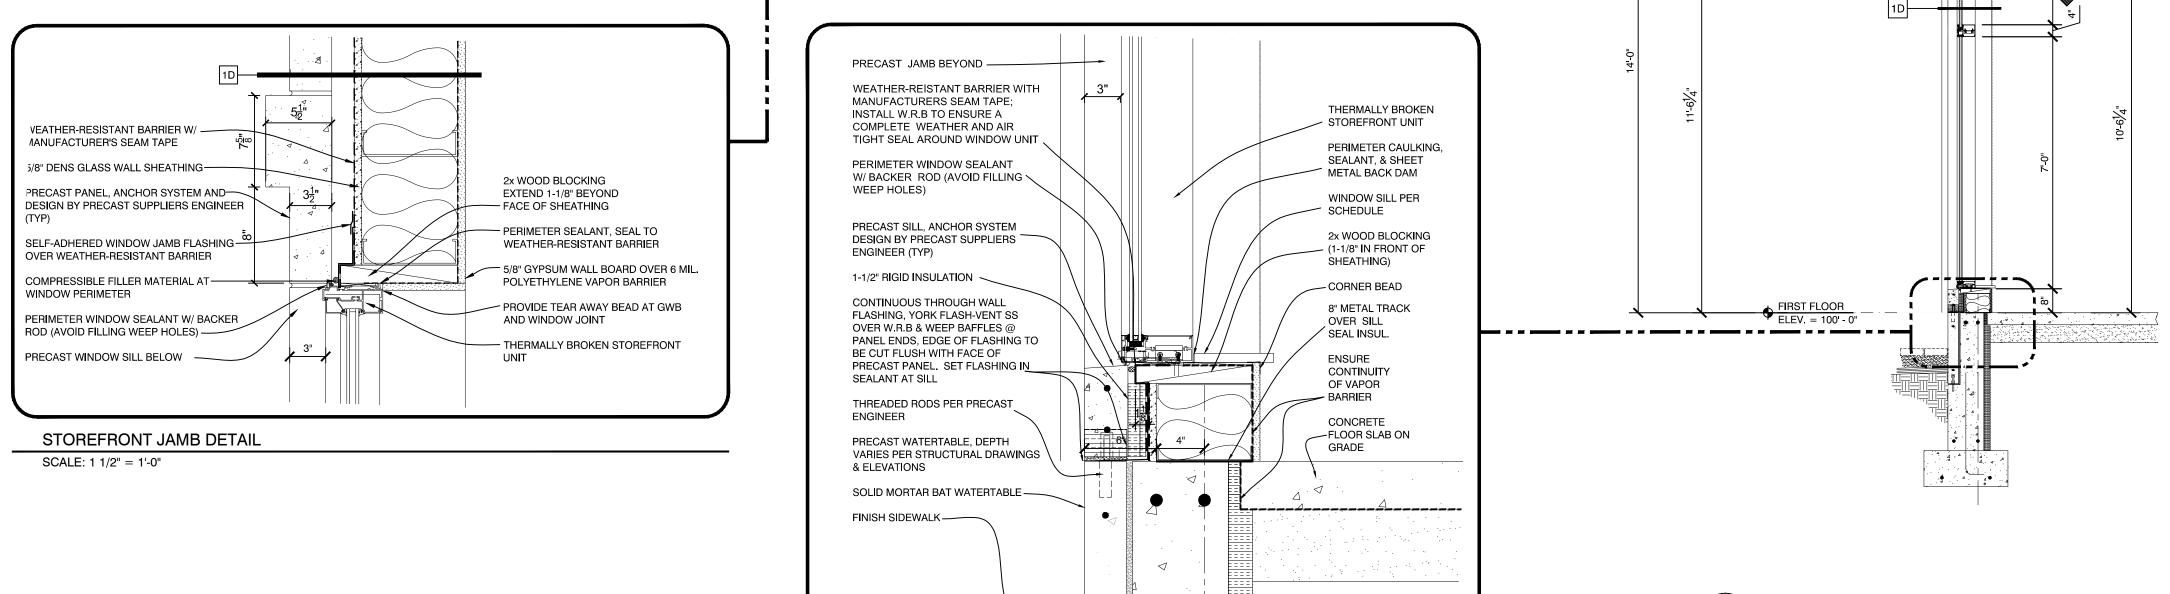

STOREFRONT SILL DETAIL SCALE: 1 1/2" = 1'-0"

REVISION:

01-27-17 DETAILS ADDED 02-17-17 DETAILS UPDATED 03-14-17 BUILDING PERMIT 03-03-17 DETAILS/DIMENSIONS UPDATED

ISSUED:

KAK DLS

AC HOTELS by MARRIOTT

Fore Street / Hancock Street / Thames Street Portland, Maine

