A. FURRED WALL TO PROVIDE CONTINUOUS LAYER OF FIRE PROTECTION FOR BRACE FRAME FROM TOP OF SLAB TO UNDERSIDE OF DECK ABOVE - FIRESEAL ALL PENETRATIONS UTILIZING UL DETAILS

B. INCREASE SPACING BETWEEN METAL STUD TRACKS AT DEMISING WALL TO ALIGN WITH COLUMN ENCLOSURE FACE

C. PROVIDE 1/2" CDX PLYWOOD UNDER GYP BD FOR CONTINUOUS BLOCKING AT CLOSETS AT DEMISING/SHAFT/CORRIDOR WALLS

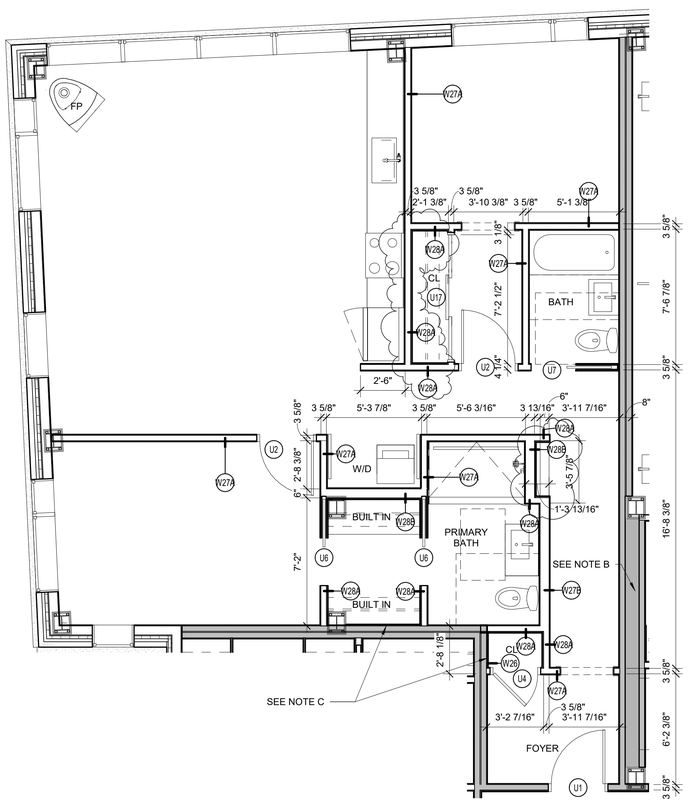

1 UNIT 01
1/4" = 1'-0"

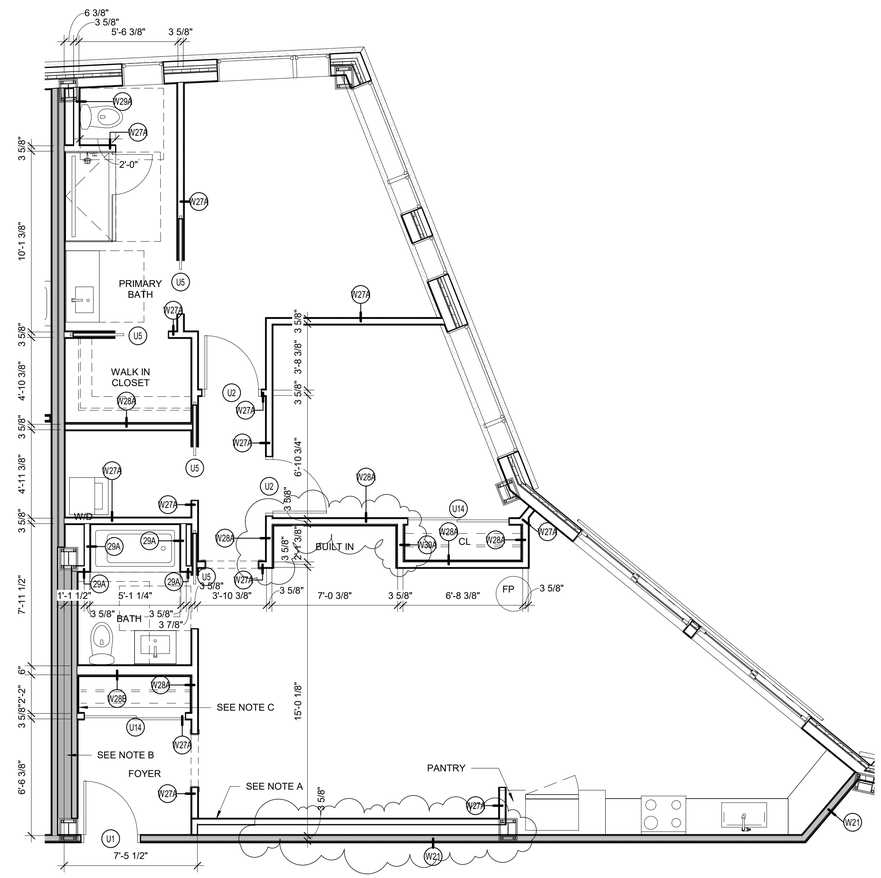

2 UNIT 02
1/4" = 1'-0"

LICENSED ARCHITECT
DAVID LLOYD
NO. 936
STATE OF MAINE

Prepared For:
EssexNorth 20 Thames LLC
P.O. Box 394
Topsfield, MA 01983

Consultant:

Architect:
ARCHETYPE architects
48 Union Wharf Portland, Maine 04101
(207) 772-6022 Fax (207) 772-4056

Project:
20 THAMES STREET CONDOMINIUM
20 Thames Street, Portland Maine

Revisions:
6 10/11/17 ADDENDUM 3

Scale: 1/4" = 1'-0"

Date: 11 OCT 2017

ENLARGED UNIT PLANS

A6.00