


**GENERAL NOTES**

- DRAWING NOTES:** CONTRACTOR TO FURNISH AND INSTALL ALL NOTED LABOR AND MATERIALS UNLESS OTHERWISE NOTED.
- CODE COMPLIANCE:** ALL WORK SHALL CONFORM TO THE LATEST EDITION OF STATE, LOCAL AND OTHER CODES WHICH APPLY TO THIS PROJECT OR HAVE JURISDICTION.
- COORDINATION:** IT IS THE RESPONSIBILITY OF THE CONTRACTOR TO COORDINATE ALL DISCIPLINES AND TRADES SO THAT ALL BUILDING SYSTEMS AND COMPONENTS CAN BE ASSEMBLED WITHOUT CONFLICTS. IN THE EVENT THAT THE CONSTRUCTION DOCUMENTS DEFINE CONDITIONS WHICH PROHIBIT, OR MAY PROHIBIT, SUCH ASSEMBLY, THE CONTRACTOR SHALL BRING TO THE ARCHITECTS ATTENTION, IN WRITING AND IN A TIMELY FASHION, SUCH CONDITION. THE CONTRACTOR SHALL NOT PROCEED WITH RELATED WORK WITHOUT A WRITTEN RESOLUTION CLARIFICATION FROM THE ARCHITECT.
- DISCREPANCIES & CLARIFICATIONS:** THIS PROJECT INVOLVES THE FIT-UP OF AN EXISTING BUILDING. EXISTING DIMENSIONS SHOWN ON THE DRAWINGS ARE BELIEVED TO BE ACCURATE, BUT CANNOT BE GUARANTEED. MEASURE AND VERIFY DIMENSIONS IN FIELD PRIOR TO FABRICATION AND CONSTRUCTION. IT IS THE RESPONSIBILITY OF THE CONTRACTOR TO BRING TO THE ARCHITECTS ATTENTION, IN WRITING, ANY DISCREPANCIES OR AMBIGUITIES IN THE DRAWINGS AND/OR SPECIFICATIONS. THE CONTRACTOR SHALL NOT PROCEED WITH RELATED WORK WITHOUT A WRITTEN RESOLUTION OR CLARIFICATION FROM THE ARCHITECT.
- LAYOUT:** UNLESS INDICATED OTHERWISE, CENTER WALL FRAMING AND PARTITION FRAMING ON COLUMN LINES. FLOOR PLAN DIMENSIONS ARE TO CENTER OF FRAMING, FACE OF CONCRETE, FACE OF CMU, OR FROM COLUMN CENTERLINES, UNLESS INDICATED OTHERWISE. DOORS AND WINDOWS ARE DIMENSIONED TO CENTERLINES UNLESS INDICATED OTHERWISE.
- CENTERING:** UNLESS INDICATED OTHERWISE, CENTER BUILDING ELEMENTS WITHIN OR BETWEEN OTHER BUILDING ELEMENTS WHEN CONDITIONS OR THE DRAWINGS INDICATE OR IMPLY THAT SUCH IS THE INTENT, WHETHER OR NOT DIMENSIONS ARE INCLUDED.
- SYMMETRY:** WHERE CONDITIONS OR THE DRAWINGS INDICATE OR IMPLY THAT SYMMETRY IS INTENDED, INFORMATION PROVIDED AT ONE SIDE APPLIES EQUALLY TO BOTH SIDES, UNLESS CONDITIONS CLEARLY PRECLUDE SUCH APPLICATION.
- ACCESSIBILITY:** ALL HANDICAPPED ACCESSIBLE BATHROOMS, GRAB BARS, AND DOOR OPENINGS SHALL MEET THE REQUIREMENTS OF TITLE 94-348, CHAPTER 5 OF THE MAINE HUMAN RIGHTS COMMISSION TITLE LATEST EDITION & UFAS 504 STANDARDS FOR ACCESSIBLE DESIGN.
- DRAWING SCALES:** WORK FROM THE GIVEN DIMENSIONS ONLY. SCALE IS INDICATED ON THE DRAWINGS FOR CONVENIENCE ONLY. IT IS NOT INTENDED THAT INFORMATION BE DETERMINED BY SCALING THE DRAWINGS SINCE SOME ITEMS MAY NOT BE TO SCALE.
- WATER-RESISTANT GWB:** INSTALL WATER-RESISTANT GYPSUM WALL BOARD IN ALL REST ROOMS & TOILET ROOMS OR AT ANY WALL WITH PLUMBING FIXTURES.
- HIGH IMPACT GWB:** INSTALL HIGH IMPACT GYPSUM WALL BOARD IN ALL STAIRWELLS
- INTERIOR ELEVATIONS:** INTERIOR ELEVATIONS MAY BE REVERSED FROM AND/OR SIMILAR TO ACTUAL CONDITIONS. SEE FLOOR PLANS FOR WINDOW AND DOOR QUANTITIES AND LOCATIONS, FOR CASEWORK LAYOUTS, AND FOR MONITOR LOCATIONS.
- BUILDING INSULATION:** PROVIDE AS INDICATED IN WALL SECTIONS AND IN ACCORDANCE WITH PARTITION TYPES, WHETHER OR NOT SHOWN IN DETAILS AND OTHER DRAWINGS. FOR CLARITY, INSULATION MAY NOT BE SHOWN IN SOME CASES, EVEN IF IT IS TO BE PROVIDED.
- BLOCKING:** INSTALL BLOCKING BEHIND ALL SURFACE-APPLIED FIXTURES TRIM, CASEWORK, SHELVES, BRACKETS, TOILET ACCESSORIES, CHAIR RAILS, PICTURE RAILS, GRAB BARS, BASE MOLDINGS, AND AS OTHERWISE REQUIRED, WHEN SUCH ITEMS ARE APPLIED ON STUD WALLS.
- PENETRATIONS AT STRUCTURAL MEMBERS:** BEFORE PENETRATING JOISTS, BEAMS OR OTHER STRUCTURAL MEMBERS, CONSULT WITH THE ARCHITECT.
- DAMAGED WORK:** BUILDING OR SITE COMPONENTS WHICH ARE AFFECTED BY NEW WORK, DEMOLITION, OR WHICH MAY BE DAMAGED BY THE GENERAL CONTRACTOR OR ANY SUB-CONTRACTOR SHALL BE REPLACED OR RESTORED TO ORIGINAL CONDITION AND COLOR TO MEET THE APPROVAL OF THE ARCHITECT.
- UTILITIES:** VERIFY THE SIZE AND LOCATION OF ALL UNDERGROUND UTILITIES AND REPORT ANY DISCREPANCIES TO THE ARCHITECT IN WRITING. DO NOT PROCEED WITH WORK UNTIL THE DISCREPANCY HAS BEEN RESOLVED TO THE SATISFACTION OF THE ARCHITECT.
- RATED CONSTRUCTION:** PROVIDE RATED CONSTRUCTION AS REQUIRED BY CODE, AS SPECIFIED, AND AS INDICATED ON DRAWINGS. IT IS THE RESPONSIBILITY OF THE CONTRACTOR TO PROVIDE AND INSTALL ALL COMPONENTS REQUIRED TO CREATE SUCH RATED CONSTRUCTION, REGARDLESS OF WHETHER OR NOT SUCH COMPONENTS ARE INDICATED. PROVIDE CONTINUITY OF SUCH RATED CONSTRUCTION AROUND AND BETWEEN SPACES, INCLUDING AT CHASES AND AT FLOORS, TO MAINTAIN COMPLETE SEPARATIONS, EVEN IF NOT SPECIFICALLY INDICATED.
- SHOP DRAWINGS:** SUBMIT SHOP DRAWINGS TO THE ARCHITECT FOR REVIEW PRIOR TO FABRICATIONS. SUBMITTALS REQUIRED INCLUDE, BUT ARE NOT LIMITED TO, SHOP DRAWINGS FOR ALL PREFABRICATED CONCRETE, STEEL, MILLWORK & SIGNAGE, SAMPLES OF ALL PROPOSED PAINTS, METALS, WALL COVERINGS, LAMINATES, SOLID SURFACE MATERIALS, CERAMIC TILE, AND HARDWARE. SUBMIT MANUFACTURERS' DATA FOR ALL LIGHTING SYSTEMS, AND HARDWARE.
- PERMITS:** THE GENERAL CONTRACTOR SHALL OBTAIN AND PAY FOR ANY BUILDING PERMITS REQUIRED AND CARRY ANY INSURANCE COVERAGES REQUIRED.
- INTERIOR FINISHES:** ALL INTERIOR FINISHES AND FURNISHINGS ARE TO BE CLASS 'A' FIRE-RATED AND ARE TO COMPLY WITH SECTION 920.0 BOCCA (INTERIOR FLAME SPREAD).
- ELECTRICAL DESIGN:** REFER TO ELECTRICAL DRAWINGS AND SPECIFICATIONS
- WASTE REMOVAL:** THE GENERAL CONTRACTOR SHALL DISPOSE OF ALL WASTE AND DEBRIS OFF THE PREMISES.
- LANDLORD COORDINATION:** THE GENERAL CONTRACTOR MUST COORDINATE WITH THE BUILDING OWNER ALL ACTIVITIES INCLUDING BUT NOT LIMITED TO WORK WHICH WILL GENERATE EXCESSIVE NOISE AND MODIFICATION TO UTILITIES. WORK MUST NOT INTERFERE WITH EXISTING SMOKE DETECTORS, ALARMS OR BUILDING SYSTEM MANAGEMENT.
- TEMPORARY FACILITIES:** PROVIDE ALL TEMPORARY FACILITIES AND SERVICES, CONSTRUCTION AND SUPPORT FACILITIES, AND SECURITY AND PROTECTION AS NEEDED TO PROTECT NEW AND EXISTING CONSTRUCTION FOR THE DURATION OF A COMPLETE INSTALLATION.
- FINAL CLEANING:** EMPLOY EXPERIENCED WORKERS FOR FINAL CLEANING. CLEAN EACH SURFACE TO THE CONDITION EXPECTED IN A COMMERCIAL BUILDING CLEANING PROGRAM.
- MANUFACTURERS INSTRUCTIONS:** ALL MATERIALS & EQUIPMENT SHALL BE INSTALLED ACCORDING TO MANUFACTURERS' SPECIFICATIONS.
- GUARANTEE:** GUARANTEE: ALL MATERIALS AND WORKMANSHIP SHALL BE GUARANTEED FOR A PERIOD OF ONE YEAR FROM THE DATE OF FINAL ACCEPTANCE UNLESS OTHERWISE SPECIFIED FOR A LONGER PERIOD OF TIME ON A CERTAIN ITEM.
- ASBESTOS:** ALL MATERIAL USED FOR THE CONSTRUCTION OF THIS PROJECT, WHETHER BUILDING MATERIALS OR APPURTENANCES, SHALL BE NON-ASBESTOS CONTAINING MATERIAL.
- HAZARDOUS FUMES:** THE GENERAL CONTRACTOR SHALL CONFIRM THAT ALL MATERIAL AND FINISHES SPECIFIED AND THEIR FABRICATION OR INSTALLATION WILL NOT RELEASE FUMES OR AROMAS DURING CONSTRUCTION WHICH MAY BE A HAZARD OR NUISANCE TO PERSONNEL.
- PEST CONTROL:** SEAL AND CAULK AROUND ALL PENETRATIONS, CRACKS AND CREVICES AND ANY OPENINGS CAPABLE OF HARBORING INSECTS/RODENTS.
- EXPOSED UTILITIES:** ALL EXPOSED UTILITY WIRES AND PIPES (ELECTRICAL, PLUMBING, ETC.) SHALL BE INSTALLED IN A WAY THAT DOES NOT OBSTRUCT OR PREVENT THE CLEANING OF FLOORS, WALLS, AND CEILING AREAS. THEY SHALL BE INSTALLED A MINIMUM OF 6" OFF FLOORS AND 1" OFF WALLS, CEILINGS AND ADJACENT PIPES.
- OWNER SUPPLIED EQUIPMENT:** EQUIPMENT SUPPLIED BY THE OWNER AND INSTALLED BY THE GENERAL CONTRACTOR! EQUIPMENT INFORMATION AND SPECIFICATIONS ARE TO BE THE MOST CURRENT AVAILABLE AT THE TIME OF DOCUMENTATION PREPARATION. THE GENERAL CONTRACTOR SHALL BE RESPONSIBLE FOR VERIFYING WITH THE OWNER THE EXACT DIMENSIONS AND EQUIPMENT CONNECTION REQUIREMENTS (INCLUDING ELECTRICAL CIRCUIT REQUIREMENTS) OF EQUIPMENT TO BE SUPPLIED. THE GENERAL CONTRACTOR SHALL MAKE ALL FINAL CONNECTIONS AS NOTED ON THE DRAWINGS. INSTALL THE SET UP IN WORKING ORDER, CHECK WARRANTIES, TEST AND NOT VOID WARRANTIES. THE GENERAL CONTRACTOR SHALL COORDINATE WITH THE OWNER DELIVERY, STORAGE AND INSTALLATION OF ALL OWNER SUPPLIED EQUIPMENT. THE GENERAL CONTRACTOR SHALL STORE EQUIPMENT IF REQUESTED BY THE OWNER UNTIL INSTALLATION. SEE DRAWINGS FOR OTHER OWNER SUPPLIED/GENERAL CONTRACTOR INSTALLED ITEMS.
- FIRE PROTECTION NOTE:** SPRINKLER HEADS, ALARM SYSTEM AND DETECTORS ARE TO BE LOCATED TO CONFORM WITH THE PROPOSED PLANS.
- SOILS AT FOOTINGS:** REPORT THE LOCATION OF ALL UNSUITABLE SOILS AND MATERIALS BELOW ANTICIPATED LEVEL OF FOOTING TO THE ARCHITECT PRIOR TO THE SETTING OF FORMS.
- ACCESS PANELS:** CONTRACTOR IS RESPONSIBLE FOR COORDINATING QUANTITY AND LOCATION OF ALL REQUIRED ACCESS PANELS FOR ALL MEP CONTROLS, CLEANOUTS, DAMPERS, PULL BOXES, ETC.
- EXISTING HAZARDOUS MATERIALS:** ALL HAZARDOUS MATERIALS INCLUDING BUT NOT LIMITED TO ASBESTOS AND LEAD PAINT ARE TO BE HANDLED, ENCAPSULATED, ABATED AND DISPOSED OF IN ACCORDANCE WITH ANY AND ALL FEDERAL, STATE AND LOCAL REQUIREMENTS AND REGULATIONS.
- INDUSTRY STANDARDS:** ALL WORK SHALL BE PERFORMED IN ACCORDANCE WITH INDUSTRY STANDARDS. STANDARDS INCLUDE BUT ARE NOT LIMITED TO THE FOLLOWING:  
 AAMA AMERICAN ARCHITECTURAL MANUFACTURERS ASSOCIATION  
 ACI AMERICAN CONCRETE INSTITUTE  
 ANSI AMERICAN NATIONAL STANDARDS INSTITUTE  
 ASTM AMERICAN SOCIETY FOR TESTS AND MATERIALS  
 AWI ARCHITECTURAL WOODWORK INSTITUTE  
 "CUSTOM GRADE"  
 AWS AMERICAN WELDING SOCIETY  
 IGMA INSULATING GLASS MANUFACTURERS ALLIANCE  
 NAAMM NATIONAL ASSOCIATION OF ARCHITECTURAL METAL MANUFACTURERS  
 NRCA NATIONAL ROOFING CONTRACTORS ASSOCIATION  
 NTA NATIONAL TILE CONTRACTORS ASSOCIATION  
 SMACNA SHEET METAL AND AIR CONDITIONING NATIONAL ASSOCIATION  
 WDMA WINDOW AND DOOR MANUFACTURERS ASSOCIATION

**ABBREVIATIONS**

<b>A</b>	AIR CONDITIONING	<b>L</b>	LABORATORY
AC	ACOUSTICAL CEILING TILE	LAM	LAMINATED
AD	AREA DRAIN	LB	POUND
ADAG	AMERICANS WITH DISABILITIES ACT ACCESSIBILITY'S GUIDELINES	LH	LEFT-HAND
ADD	ADDENDUM	LCC	LEAD COATED COPPER
AFF	ABOVE FINISHED FLOOR	<b>M</b>	MACHINE
AHU	AIR-HANDLING UNIT	MACH	MACHINERY
AL	ALUMINUM	MAT	MATERIAL
ARCH	ARCHITECT/ARCHITECTURAL	MAX	MAXIMUM
AWP	ACOUSTIC WALL PANEL	MDO	MEDIUM-DENSITY OVERLAY
<b>B</b>	BACK-TO-BACK ANGLES	MECH	MECHANICAL
B.B.G.C.	BASE BUILDING GENERAL CONTRACTOR	MEMB	MEMBRANE
BL	BUILDING LINE	MEZ	METAL
BDO	BUILDING	MEZZ	MEZZANINE
BLKG	BLOCKING	MFR	MANUFACTURER
BSMT	BASEMENT	MINIUM	MINIMUM
BTWN	BETWEEN	MISC	MISCELLANEOUS
BO	BY OTHERS	MO	MOUNTED
<b>C</b>	COURSE (MASONRY)	MTL	METAL
CER	CERAMIC	MB	MARKER BOARD
CG	CORNER GUARD	<b>N</b>	NORTH
CH	COAT HOOK	#	NUMBER
CL	CONTROL JOINT	NIC	NOT IN CONTACT
CLG	CEILING	NOM	NOMINAL DIMENSION
CLJ	CONCRETE MASONRY UNIT	NTS	NOT TO SCALE
CO	CLEAN OUT	<b>O</b>	ON/OVER
COL	COLUMN	OC	ON CENTER
CONC	CONCRETE	OD	OUTSIDE DIAMETER/OUTSIDE DIMENSION
COND	CONDITION	OFF	OFFICE
CONN	CONNECT/CONNECTION	OPNG	OPENING
CONST	CONSTRUCTION	OP	OPPOSITE
CON	CONTINUOUS	OP H	OPPOSITE HAND
CORR	CORRIDOR	OSB	ORIENTED STRAND BOARD
CUH	CERAMIC TILE	OUNCE	OUNCE
CU	CABINET UNIT HEATER	<b>P</b>	PURCHASED BY OWNER INSTALLED BY CONTRACTOR
<b>D</b>	DOUBLE	PBIOBC	PURCHASED BY OWNER INSTALLED BY CONTRACTOR
DBL	DOUBLE	PC	CONTRACTOR
DF	DRINKING FOUNTAIN	PREF	PREFABRICATED
DIA	DIAMETER	PL	PLATE
DIF	DIFFUSER	PLAM	PLASTIC LAMINATE
DIM	DIMENSION	PR	PAIR
DN	DOWN	PRE FAB	PREFABRICATE
DOOR	DOOR	PRIV	PRIVATE
DSP	DRY STAND PIPE	PRIM	PRIMED
DWG	DRAWING	PSI	POUNDS PER SQUARE FOOT
<b>E</b>	EAST	PSI	POUNDS PER SQUARE INCH
EA	EACH	PT	PAINTED
EL	ELEVATION	PTN	PARTITION
ELEC	ELECTRICAL	PVC	POLYVINYL CHLORIDE
ELEV	ELEVATION	PLYWOOD	PLYWOOD
ENTR	ENTRANCE	PT	PRESSURE TREATED
EQUIP	EQUIPMENT	PERF	PERFORATED
EXP	EXPANSION	<b>Q</b>	QUARRY TILE
EXPB	EXPANSION BOLT	QTR	QUARTER
EXT	EXTERIOR	<b>R</b>	RISER/RADIUS
EPDM	ETHYLENE PROPYLENE DIENE MONOMER	RAD	RADIUS
EW	ELECTRIC WATER COOLER	RB	RUBBER BASE
<b>F</b>	FAHRENHEIT	REF	REFLECTED CEILING PLAN
FB	FLAT BAR	RD	ROOF DRAIN
FC	FIRE EXTINGUISHER AND CABINET	REBAR	REINFORCING BAR
FD	FLOOR DRAIN	REF	REFRIGERATOR
FE	FIRE EXTINGUISHER	RENF	REINFORCED
FEC	FIRE EXTINGUISHER CABINET	REQ	REQUIRED
FTWD	FIRE TREATED WOOD	RES	RESILIENT
FIN	FINISH	REV	REVERSE
FL	FLOOR	RM	ROOM
FOB	FACE OF BRICK	RO	ROUGH OPENING
FOC	FACE OF CONCRETE	ROW	RIGHT OF WAY
FOF	FACE OF FINISH	<b>S</b>	SOUTH
FOS	FACE OF STUDS	SCHED	SCHEDULE
FOW	FACE OF WALL	SQ	SQUARE FEET
FSS	FIRE SUPPRESSION SYSTEM	SIM	SIMILAR
FT	FOOTING	SPEC	SPECIFICATION
FRG	FIBER REINFORCED GYPSUM	SO	SQUARE
FTR	FIN TUBE RADIATION	SST	STAINLESS STEEL
HH	FUME HOOD	STD	STANDARD
<b>G</b>	GAUGE	STC	SOUND TRANSMISSION CLASS
GA	GALVANIZED	STL	STEEL
GB	GRAB BAR	STOR	STORAGE
GC	GENERAL CONTRACTOR	STRUC	STRUCTURE/STRUCTURAL
GFI	GROUND-FAULT INTERRUPTER	SUSP	SUSPENSION
GL	GLASS/GLAZING/GLAZED	<b>T</b>	TONGUE-&GROOVE
GLAM	GLUE-LAMINATED WOOD	TEL	TELEPHONE
GND	GROUND	TH	THICK
GSB	GYPSUM WALL BOARD	TOD	TOP OF DECK
<b>H</b>	HOSE BIB	TOS	TOP OF STEEL
HB	HANDICAP	TYP	TYPICAL
HM	HOLLOW METAL	TV	TELEVISION
HORIZ	HORIZONTAL	TB	TACK BOARD
HP	HORSE POWER/HIGH POINT/HEAT PUMP	TCC	TOP OF CONCRETE
HR	HOUR	<b>U</b>	UNDERWRITERS LABORATORIES, INC.
HW	HOT WATER	UL	UNDERWRITERS LABORATORIES, INC.
HWAC	HEATING VENTILATION AIR CONDITIONING	UV	UL VENTILATOR
<b>I</b>	INSIDE DIMENSION/INSIDE DIAMETER	<b>V</b>	VCT
ID	INCHES	VERT	VERTICAL
IN	INFORMATION	VIF	VERIFY IN FIELD
INFO	INFORMATION	VOL	VOLUME
INSUL	INSULATION	<b>W</b>	WEST
<b>J</b>	JOIST	W/O	WITHOUT
JT	JOINT	W	WITH
<b>K</b>	KILN-DRIED	WD	WOOD
KD	1000 POUNDS	WF	WIDE FLANGE
KIP		WP	WORK POINT
		WT	WEIGHT

**FIRESTOPPING DETAILS**

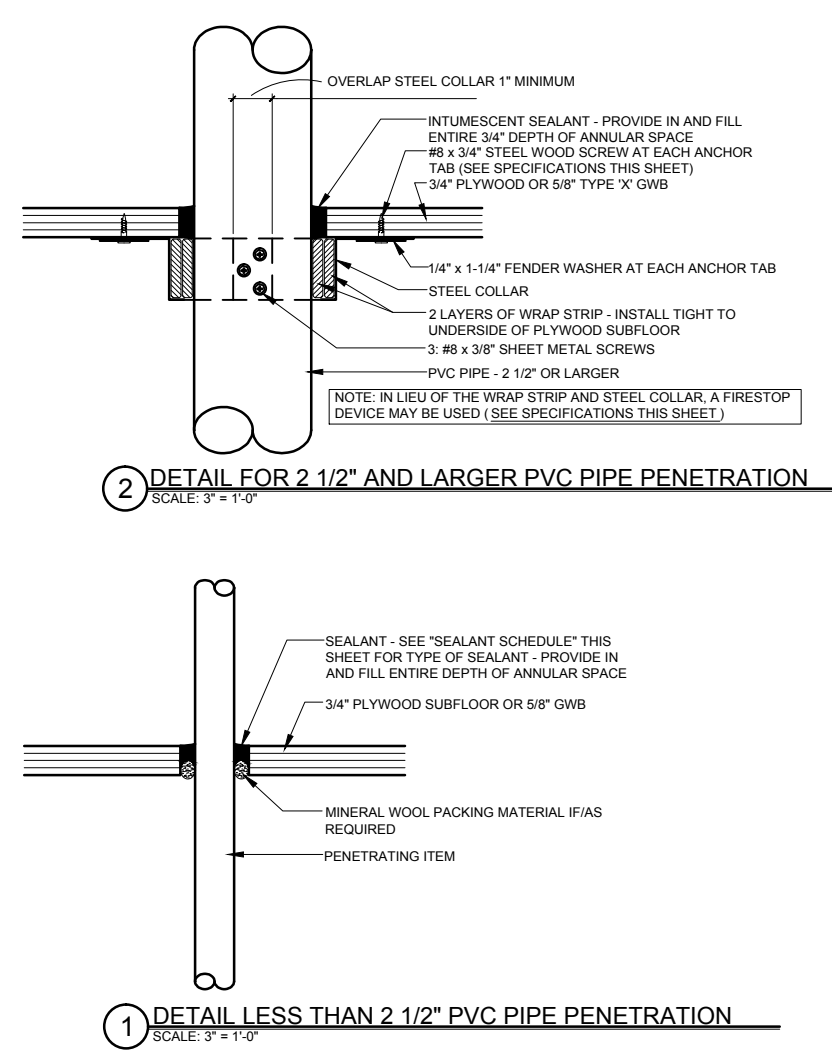

**SPECIFICATIONS**

**WRAP STRIP:** 1/4" THICK x 1 1/2" MINIMUM WIDTH INTUMESCENT MATERIAL WITH PLASTIC FILM FACING BOTH SIDES. TEMPORARILY SECURE WITH MAKING TAPE. SPECIFIED TECHNOLOGIES INC. (STI) "SpecSeal Red Wrap Strip" OR "SpecSeal BLU Wrap Strip" OR EQUAL.

**STEEL COLLAR:** WRAP STRIP MANUFACTURER'S STEEL COLLAR, FABRICATED FROM .016 INCH THICK GALVANIZED SHEET STEEL. WIDTH TO MATCH WRAP STRIP (1 1/2" MINIMUM), WITH 1 INCH x 2 INCH ANCHOR TABS AND RETAINER TABS. ANCHOR TABS TO BE SYMMETRICALLY OPPOSED AROUND COLLAR; PROVIDE 3 TABS FOR 2 1/2" AND 3" PIPE, PROVIDE 4 TABS FOR 4" PIPE.

**INTUMESCENT SEALANT:** ONE-PART, INTUMESCENT, LATEX ELASTOMER TESTED TO ASTM E 814. MINIMUM EXPANSION OF 3x AT 1000°F. 3M "FIRE BARRIER SEALANT CP 2500H" OR EQUAL.

**FIRESTOP SEALANT:** SINGLE COMPONENT NONCOMBUSTIBLE FIRE RATED SEALANT TESTED TO ASTM E 814. TESTED TO 3000°F. "BOSS 136 FIRESTOP/DRAFT SEALANT" MANUFACTURED BY ACCUMETRIC, LLC, OR EQUAL.



**SEALANT SCHEDULE:**

**INTUMESCENT SEALANT:** PROVIDE AT ALL PENETRATIONS THROUGH RATED CONSTRUCTION FOR PENETRATING ITEMS INCLUDING BUT NOT LIMITED TO: PVC PIPE; ROOF LEADER PIPES, GAS PIPES & LINES; SPRINKLER PIPES; ELECTRICAL & COMMUNICATIONS CABLES & WIRES; AND ALARM SYSTEM WIRES. DO NOT USE INTUMESCENT SEALANT AT DOMESTIC HOT WATER OR HYDRONIC HEATING SYSTEM PIPES.

**FIRESTOP SEALANT:** PROVIDE AT ALL PENETRATIONS THROUGH RATED CONSTRUCTION FOR PENETRATING ITEMS INCLUDING DOMESTIC HOT AND COLD WATER PIPES AND HYDRONIC HEATING SYSTEM PIPES.

**NOTE:** FOR LOCATIONS OF RATED CONSTRUCTION, SEE ARCHITECTURAL FLOOR PLANS AND SECTIONS

**DRAWING LEGEND**

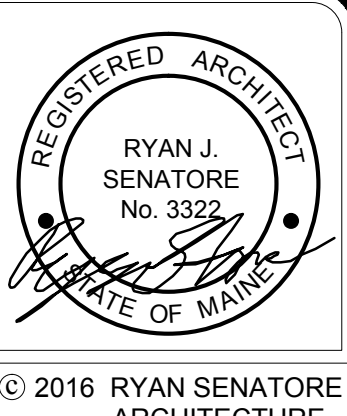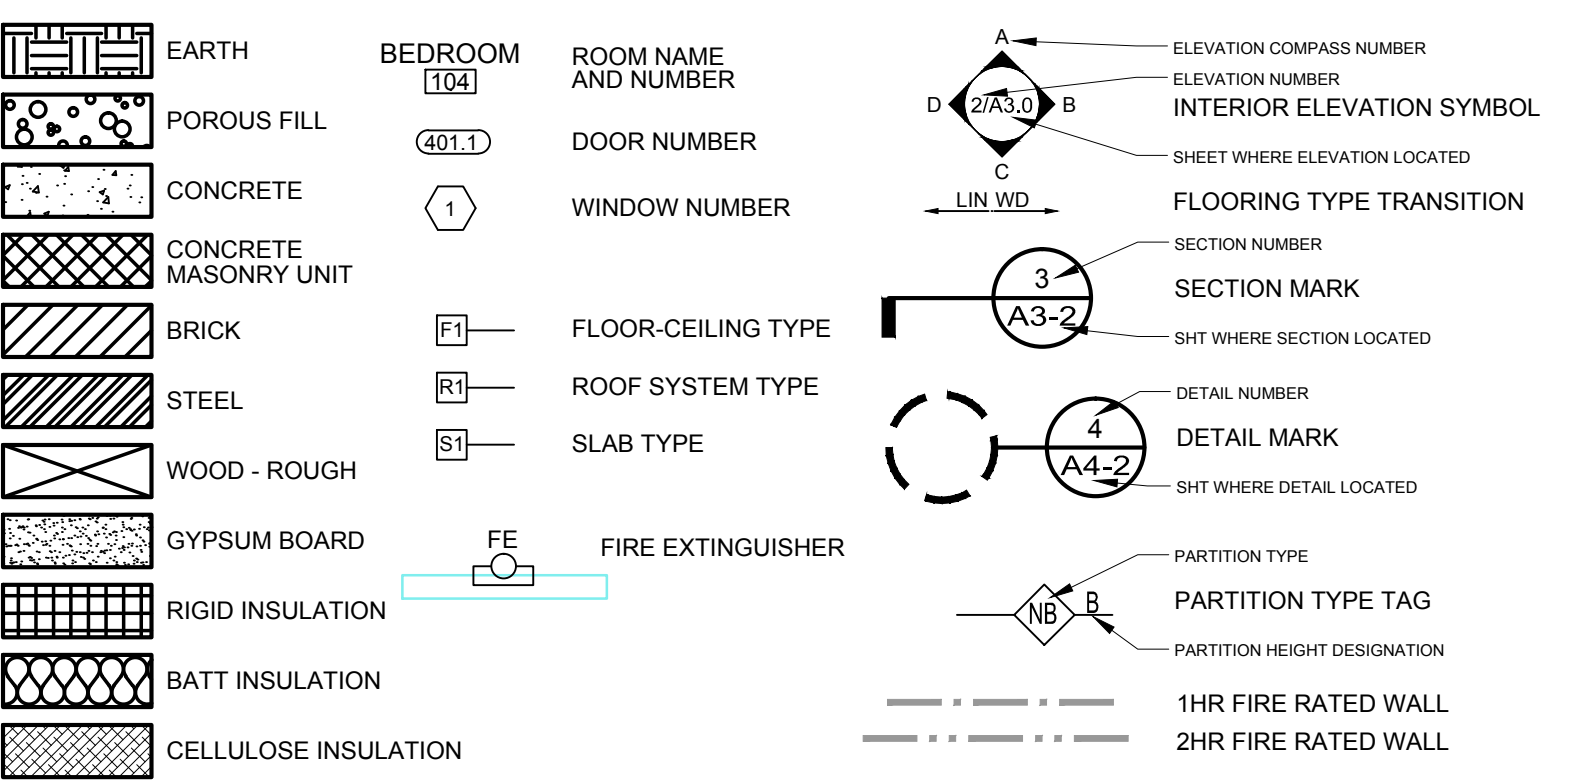

© 2016 RYAN SENATORE ARCHITECTURE

**RESIDENCES**  
107 INDIA STREET  
PORTLAND, MAINE



**CONSULTANTS:**  
STRUCTURAL: Structural Integrity  
77 Oak Street  
Portland, ME 04101  
207-774-4614

REVISIONS:

DATE: FEBRUARY 5, 2016

PROJECT No.

DRAWN BY: RRT

CHECKED BY: RJS

SCALE: AS NOTED

SHEET TITLE:  
**GENERAL NOTES  
ABBREVIATIONS  
AND LEGEND**

**G1-0**