

SERIES 2200

SLIDING DOOR

MODERN DESIGN

SERIES 2200

is an evolved system which accounts for optimum thermal performance, smoother operation, premium security, sound dampening and stylized features

available in 3 configurations

standard sizes or custom sizes

can be finished with sidelights and transoms

frame depth of 6" with accessory options


					u-value		solar heat co-efficient		Air infil/exfil
	dual glazed LoE272 + argon				1.53		0.3		0.8 / 0.9
	triple glazed LoE272(x2) + argon (x2)				1.02		0.29		0.8 / 0.9

standard sizes

	5ft 2-panel	6ft 2-panel	8ft 2-panel	7ft 3-panel	9ft 3-panel	12ft 3-panel	10ft 4-panel	12ft 4-panel	16ft 4-panel
	58 7/8"	70 7/8"	94 1/2"	89"	107 3/16"	142 5/8"	115 5/8"	139 3/4"	187"
Replacement 79 1/2"	•	•	•	•	•	•	•	•	•
Construction 81 7/8"	•	•	•	•	•	•	•	•	•
Tall 94 1/2"		•			•			•	

custom size ranges / extended lead time required for custom size doors;

	2-panel	3-panel	4-panel
minimum width	56"	84"	112"
maximum width	96"	144"	192"
minimum height	68"	68"	68"
maximum height	95 1/2"	95 1/2"	95 1/2"

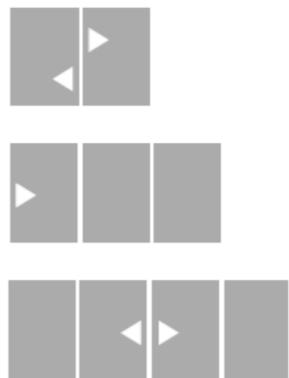

*all dimensions shown are the finished frame sizes of the door systems

more info at evw.ca

02/17