


DESIGNATION	SHEATHING AND FASTENING
GB6/12-25 (SEE ARCHITECTURAL DRAWINGS)	2" LAMINATED GYPSUM ASSEMBLY ONE SIDE, NO.6 SCREWS AT 6/12, BLOCKED (2) LAYERS 5/8" GYP. WALLBOARD OTHER SIDE, SCREWS AT 6/12, BLOCKED
FB4/6-25	FIBERBOARD WALL SHEATHING ON TWO SIDES, 8D NAILS AT 4/6, BLOCKED
FB3/6-25	FIBERBOARD WALL SHEATHING ON TWO SIDES, 8D NAILS AT 3/6, BLOCKED
P4/12-15	WOOD SHEATHING ONE SIDE WITH 10D NAILS AT 4/12, BLOCKED
P6/12-25	WOOD SHEATHING TWO SIDES WITH 10D NAILS AT 6/12, BLOCKED
P6/12-15 (TYP. EXT. WALL, U.N.O.)	WOOD SHEATHING ONE SIDE WITH 10D NAILS AT 6/12, BLOCKED

NOTE:  
 - FASTENER PATTERN SHALL BE REPRESENTED AS "SPACING OF FASTENERS AT THE PERIMETER OF THE PANEL"/"SPACING OF FASTENERS IN THE FIELD OF THE PANEL"  
 - GYPSUM WALLBOARD SHALL BE FASTENED IN PATTERN WITH NO. 6 SCREWS (TYPE S OR W) WITH LENGTH SUFFICIENT TO PROVIDE MINIMUM 1" EMBEDMENT INTO WOOD FRAMING AT 1/2", 5/8", AND 1" THICKNESSES  
 - "BLOCKED" SHALL INDICATE THAT ALL EDGES OF THE APPLIED SHEATHING MUST BE BLOCKED AND FASTENED PER THE FASTENER SPACING INDICATED  
 - WOOD SHEATHING SHALL BE 15/32" A.P.A. RATED EXPOSURE 1 PLYWOOD OR OSB SHEATHING. TYPICAL FASTENING OF WOOD SHEATHING SHALL BE MINIMUM 10D NAILS AT FASTENED 6" ON CENTER AT ALL EDGES (BLOCKED) AND 12" ON CENTER IN THE FIELD OF THE PANEL TO ALL SUPPORTS, UNLESS NOTED OTHERWISE.  
 - INTERIOR WALL SHEATHING SHALL BE 1/2" THICK STRUCTURAL FIBERBOARD WALL SHEATHING SATISFYING ASTM C 208, TYPE IV, GRADE 2, STRUCTURAL.  
 - SEE DETAIL 12/S1.4 FOR FASTENING OF BOTTOM PLATES OF SHEAR WALL TO SECOND FLOOR SLAB  
 - SEE SHEETS S2.3 AND S5.2 FOR SHEAR WALL FASTENING DETAILS AT WOOD FRAMED FLOOR LOCATIONS AND ROOF LOCATIONS, RESPECTIVELY.

- NOTES:
- G.C. SHALL BE RESPONSIBLE FOR VERIFYING ALL DIMENSIONS. G.C. MAY CONTACT ARCHITECT IF DIMENSIONAL CLARIFICATION IS NEEDED DUE TO SCALE OF DRAWINGS.
  - TOP OF FOURTH FLOOR SHEATHING IS AT 123'-5".
  - SEE SHEETS S1.0 AND S1.1 FOR ADDITIONAL STRUCTURAL NOTES.
  - COORDINATE FLOOR OPENINGS WITH PLUMBING DRAWINGS. G.C. TO ENSURE OPENINGS ARE LOCATED IN SUCH A MANNER AS NOT TO INTERFERE WITH THE BEARING WALLS OR FLOOR TRUSSES.
  - VERIFY STAIR OPENING DIMENSIONS WITH ARCHITECTURAL DRAWINGS (TYP.).
  - TYPICAL WOOD POSTS SHOWN IN FRAMED WALLS SHALL BE TRIPLE STUD POSTS. PROVIDE (3) 2X6 POST IN 2X6 WALLS AND (3) 2X4 POST IN 2X4 WALLS.
  - FASTEN STAIR STRINGERS TO STAIR WALLS WITH (2) 1/4" DIAMETER LAG SCREWS INTO STUDS AT 48" O.C. (EVERY OTHER STUD). PROVIDE 2" PENETRATION INTO WALL STUDS.
  - FLOOR TRUSSES AND WALL STUDS ALIGN THROUGHOUT THIS PROJECT. WHERE FLOOR TRUSS SPACING IS ALTERED FOR PLUMBING, PROVIDE ADDITIONAL WALL STUDS BENEATH EACH TRUSS.

NOTE: FLOOR TRUSSES AND WALL STUDS MUST ALIGN FOR FULL HEIGHT OF BUILDING - DO NOT OFFSET FLOOR TRUSSES OR STUDS FROM FRAMING ABOVE OR BELOW

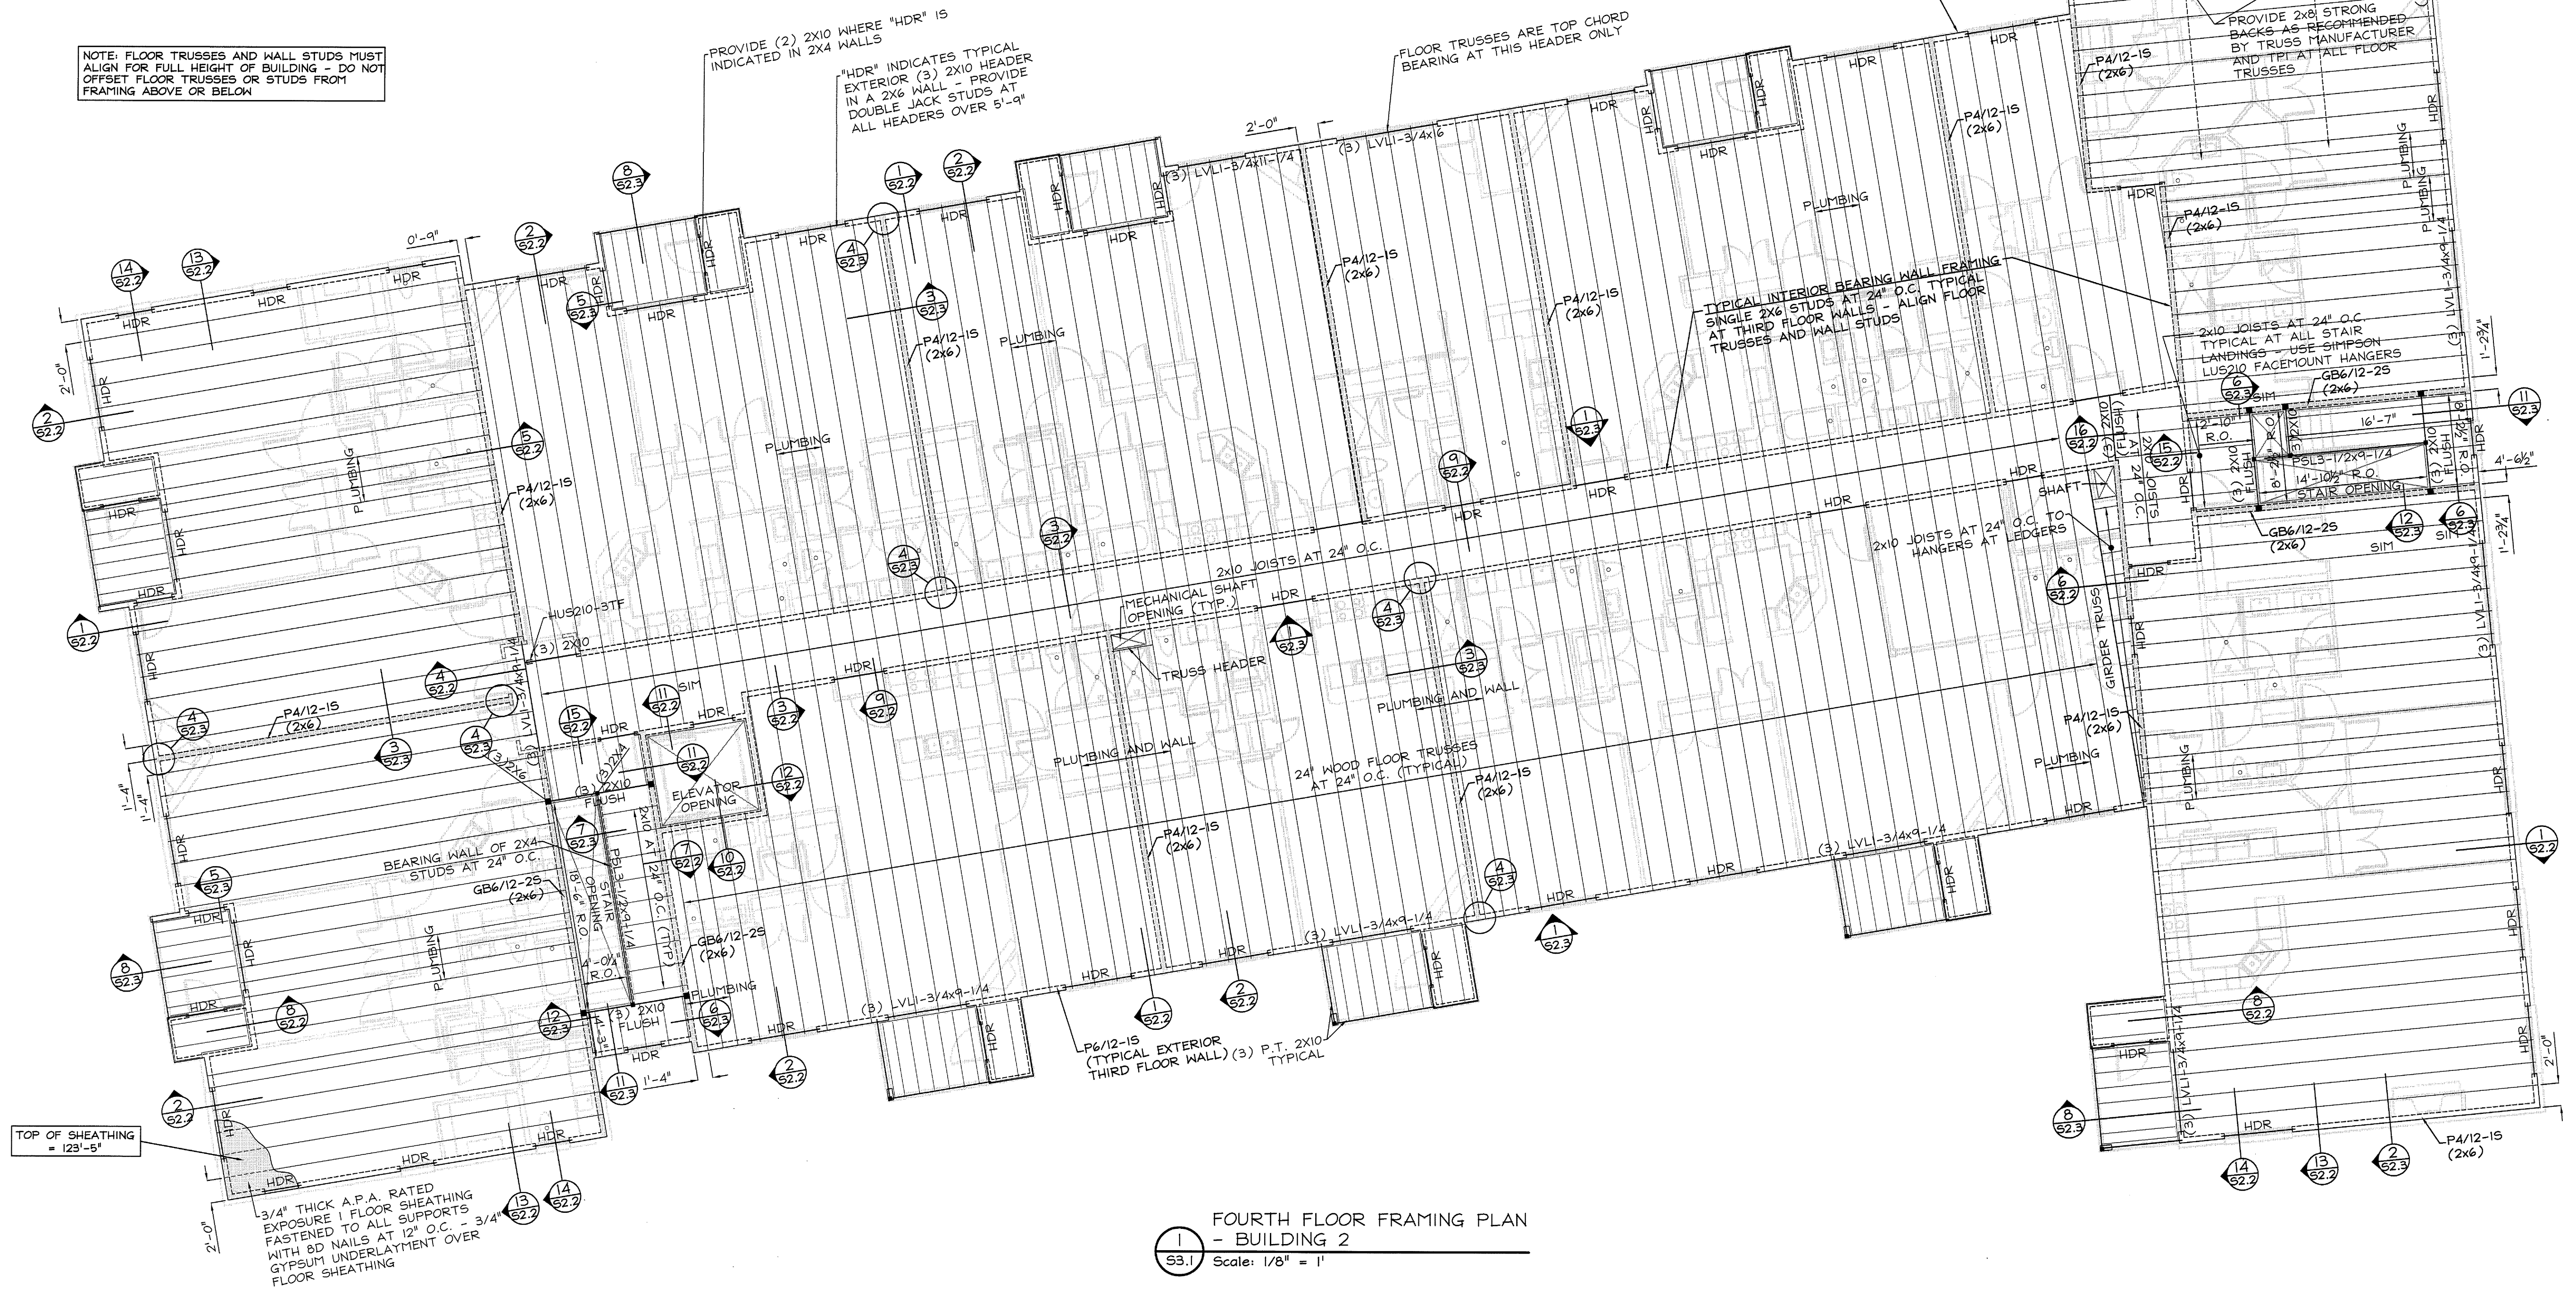

FOURTH FLOOR FRAMING PLAN  
 - BUILDING 2  
 Scale: 1/8" = 1'

REVISIONS:

