
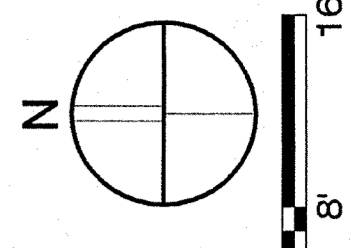


- LIGHTING NOTES:**
- REFER TO BRANING, E2.00 FOR LEGEND, SYMBOLS AND GENERAL NOTES. FOR SCHEDULES AND RISERS, REFER TO DWG. E7.00.
 - REFER TO ARCHITECTURAL DRAWINGS, INCLUDING BUT NOT LIMITED TO, REFLECTED CEILING PLANS AND ELEVATIONS FOR ASSOCIATED NOTES, MOUNTING DETAILS AND EXACT LOCATIONS OF ALL LIGHTING FIXTURES.
 - CONDUCTORS SHALL BE INSTALLED IN CONDUIT (RCS) IN THE GARAGE AREA. PROVIDE COMPRESSION TERMINATIONS TO ENABLE TERMINATION OF OVERSIZED CONDUCTORS DUE TO VOLTAGE DROP.
 - PROVIDE ZOM INCANDESCENT, ENCLOSED, GASKETED, WALL MOUNTED, EASY TO REPLACE, LIGHTING FIXTURES WITH PARABOLIC BEAM AS MANUFACTURED BY APPROVED MANUFACTURER OR APPROVED EQUAL. PROVIDE SAME CIRCUIT AS FIT RECEPTACLE.
 - SEE DRAWING E3.00 FOR LOCATION OF PANELS.
 - REFER TO ARCHITECTURAL DRAWINGS, INCLUDING BUT NOT LIMITED TO, REFLECTED CEILING PLANS AND ELEVATIONS FOR ASSOCIATED NOTES, MOUNTING DETAILS AND EXACT LOCATIONS OF ALL LIGHTING FIXTURES.
 - CONDUCTORS SHALL BE INSTALLED IN CONDUIT (RCS) IN THE GARAGE AREA. PROVIDE COMPRESSION TERMINATIONS TO ENABLE TERMINATION OF OVERSIZED CONDUCTORS DUE TO VOLTAGE DROP.
 - PROVIDE ZOM INCANDESCENT, ENCLOSED, GASKETED, WALL MOUNTED, EASY TO REPLACE, LIGHTING FIXTURES WITH PARABOLIC BEAM AS MANUFACTURED BY APPROVED MANUFACTURER OR APPROVED EQUAL. PROVIDE SAME CIRCUIT AS FIT RECEPTACLE.
 - SEE DRAWING E3.00 FOR LOCATION OF PANELS.

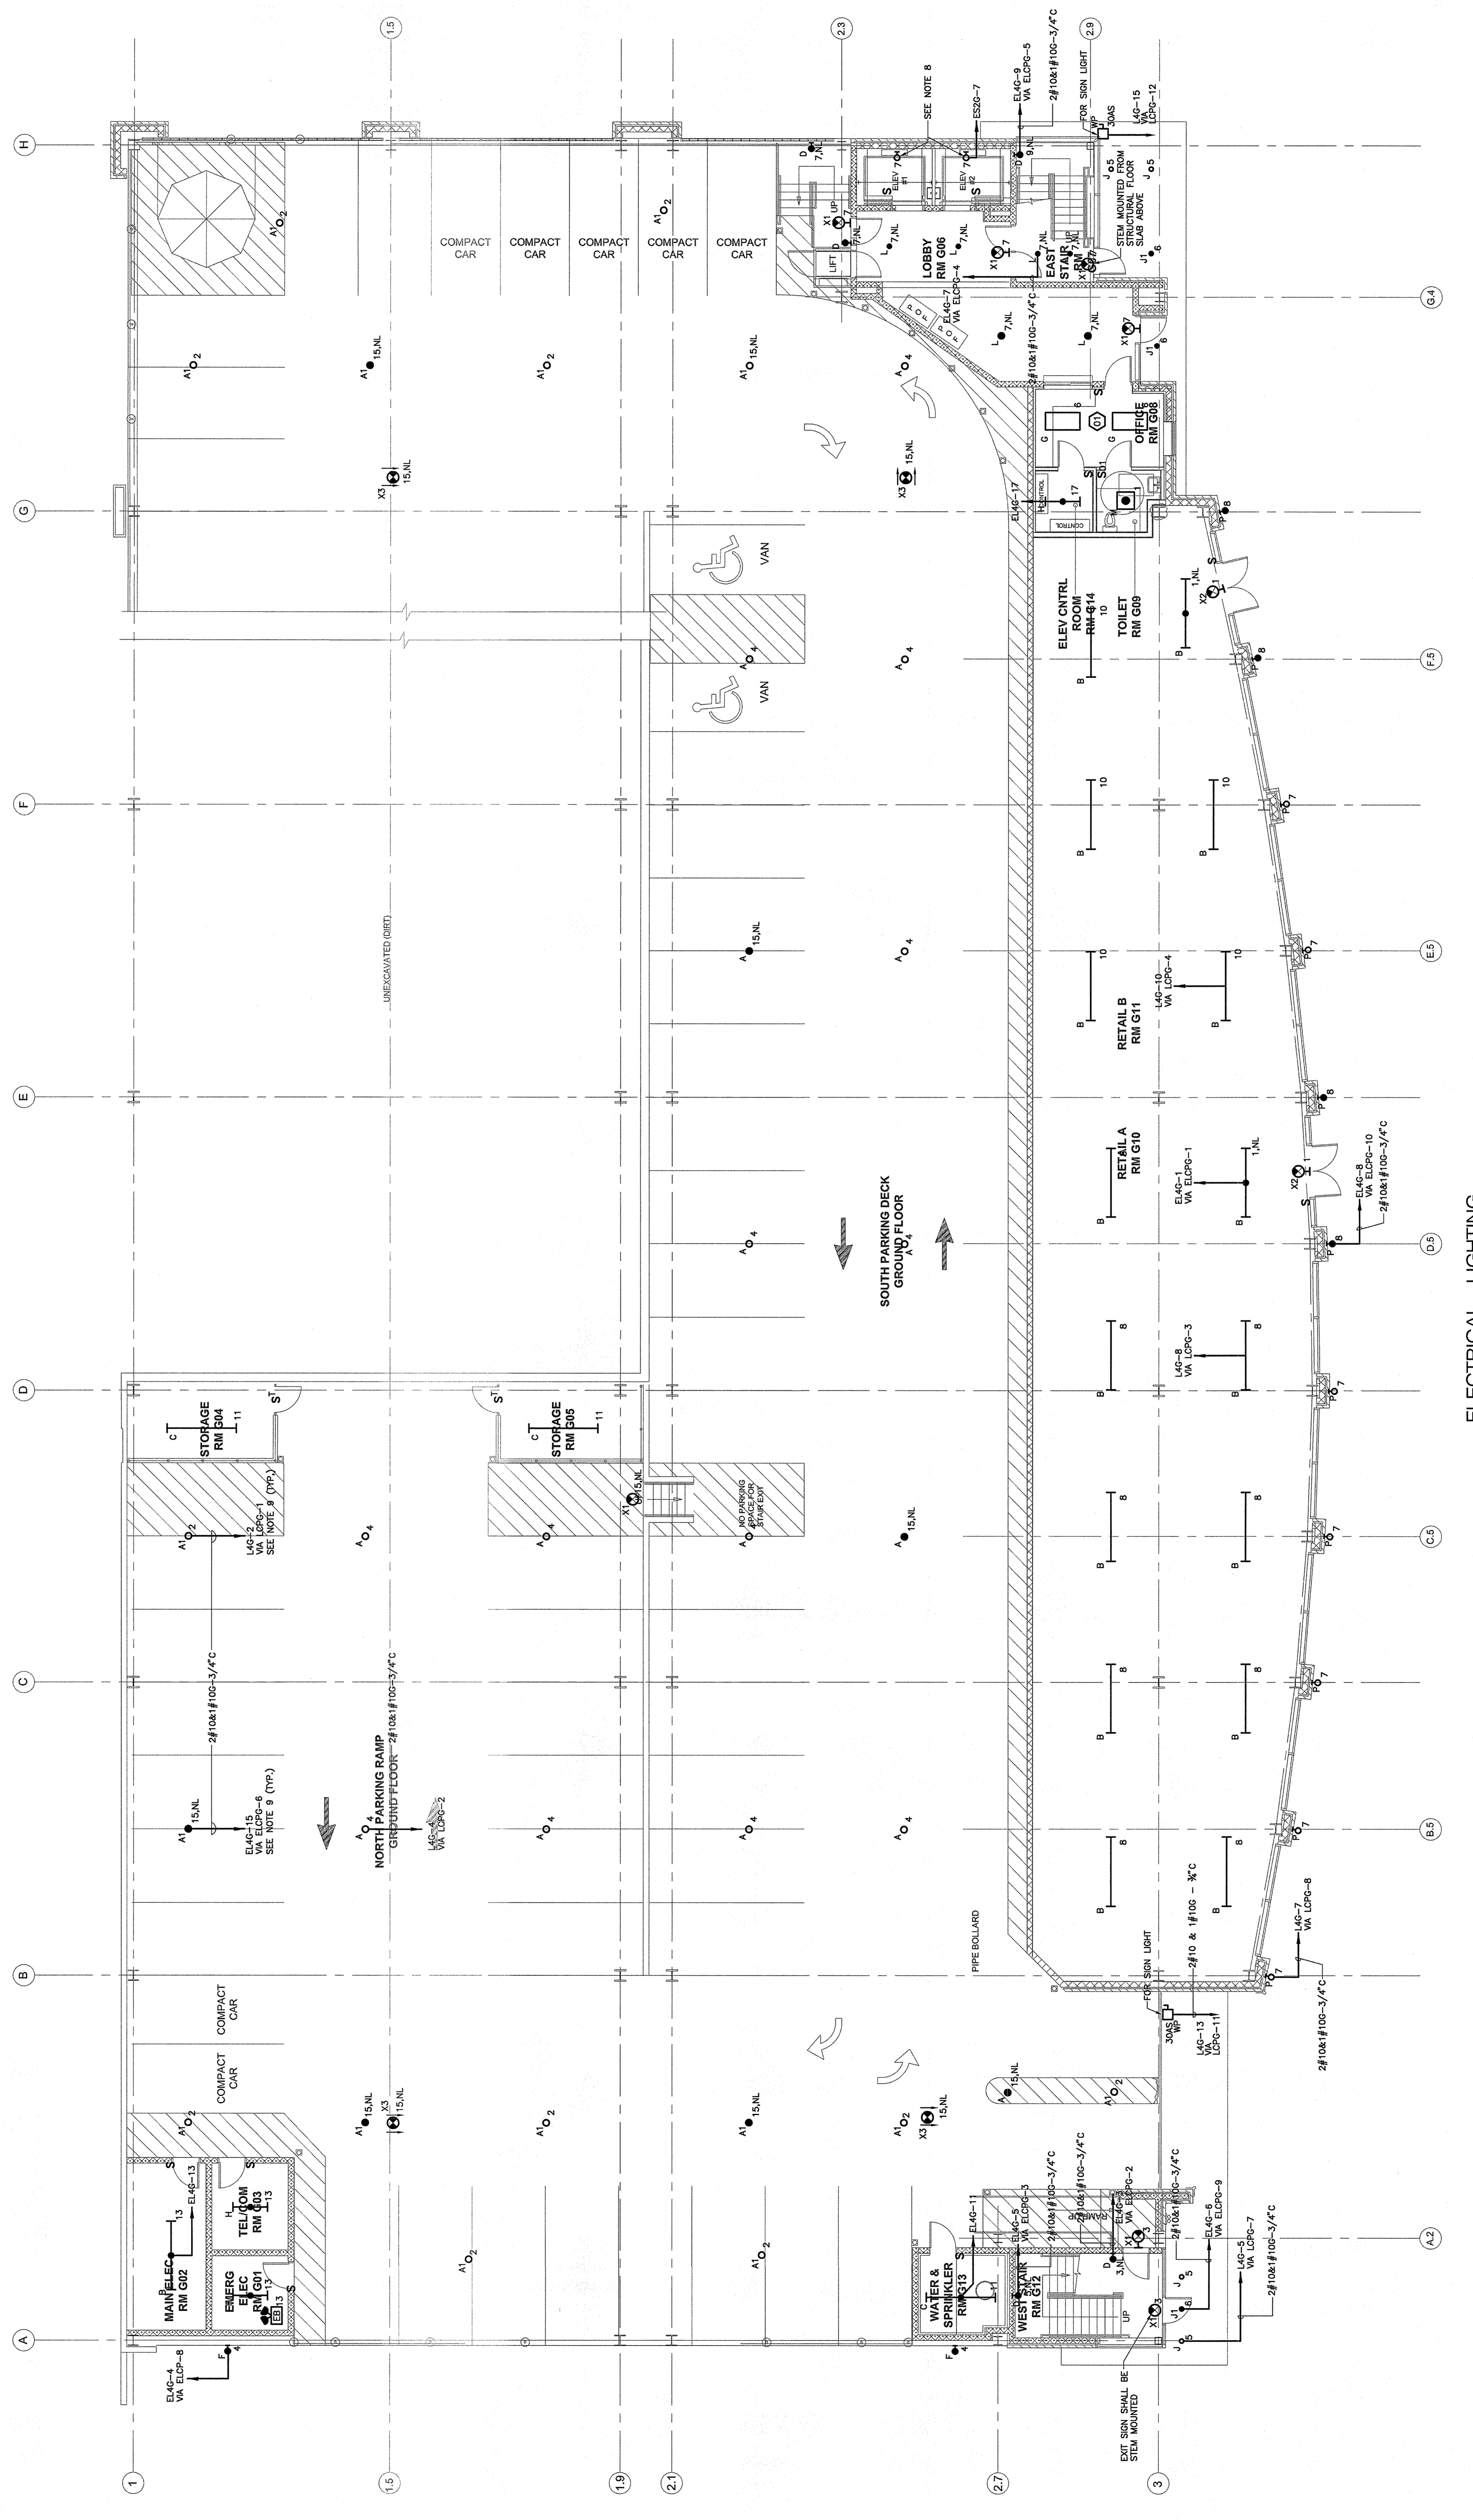

ELECTRICAL - LIGHTING GROUND FLOOR PLAN
SCALE: 1/8"=1'-0"