

- NOTES:**
- FOR GENERAL INFORMATION, SEE SHEET S0.01.
 - TOP OF STEEL IS (-1'-3/2") BELOW TOP OF DECK (TYP. UON).
 - FOR HSS BUMPER TUBES LOCATE TOP OF STEEL 2'-0" ABOVE TOP OF DECK AT COLUMN.
 - PRECAST DOUBLE TEES ARE 2'-10" DEEP (MAX) WITH 15" NIBS, UON.
 - FOR COLUMN SCHEDULE AND DETAILS, SEE SHEET S2.01.
 - FOR PRECAST DOUBLE TEE SECTIONS AND DETAILS, SEE SHEET S6.01.
 - FOR TYPICAL DETAILS, SEE SHEETS S7.01.
 - NO FACING SUPPORTS SHOWN. SEE SECTIONS FOR DETAILS.
 - PROVIDE TRAFFIC BEARING MEMBRANE ON DECK ABOVE MECH & ELEVATOR ROOMS, ALL LEVELS AS REQUIRED.
- LEGEND:**
- (X'-X") TOP OF DECK
 - C=X" BEAM CAMBER
 - RD ROOF DRAIN
 - FRAME MOMENT CONNECTION
 - - - NON-FRAME MOMENT CONNECTION
 - 4'-6"x3" P/C WASH
 - CMU WALL
 - CIP TOPPING
 - 1/2" INDICATES 1/2" DEEP 18 GA GALV ROOF DECK

OWNER
OCEAN GATEWAY GARAGE LLC
 PORTLAND, ME
 CLIENT
RIVERWALK, LLC


50 MONUMENT SQ.
 PORTLAND, ME 04101

PROJECT
OCEAN GATEWAY GARAGE

MIDDLE STREET
 PORTLAND, MAINE

REVISIONS NO.	DATE	DESCRIPTION
1	8.10.07	BULLETIN 1

DATE 22 FEB 2007
 SCALE AS NOTED
 PROJECT NO. 05-032

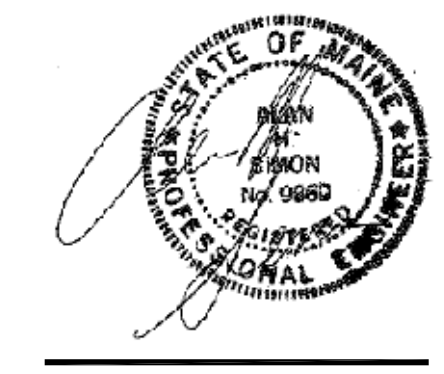

DRAWING TITLE
ROOF STRUCTURAL PLAN

SHEET NUMBER
S1.07