

Construction Detail

Frame

FrameWork

Box: 2"x8" P.T

Joist: 2"x8" P.T


Post: 2" Steel Columns

Joist are 16" O.C.

All joist are to have hangers.


⊗ indicates column

Column to be lagged to roof top and frame work.

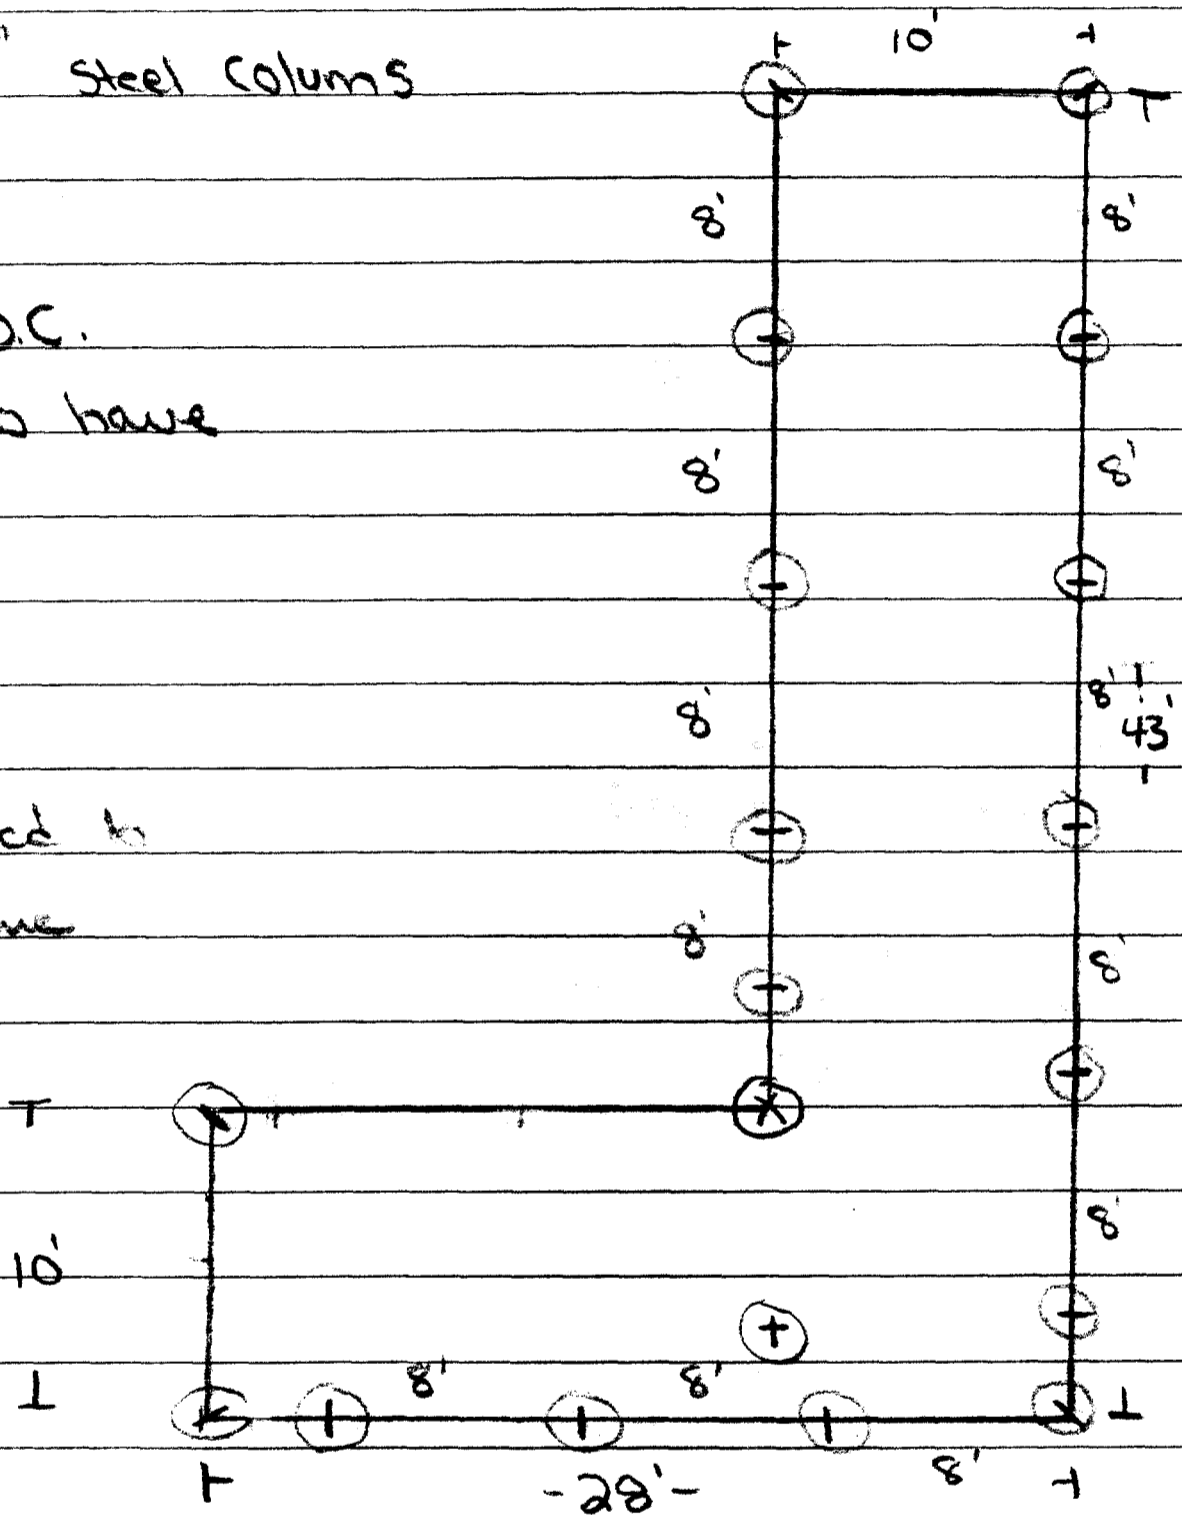

Detail

Double Joist at intersection
of Frames.

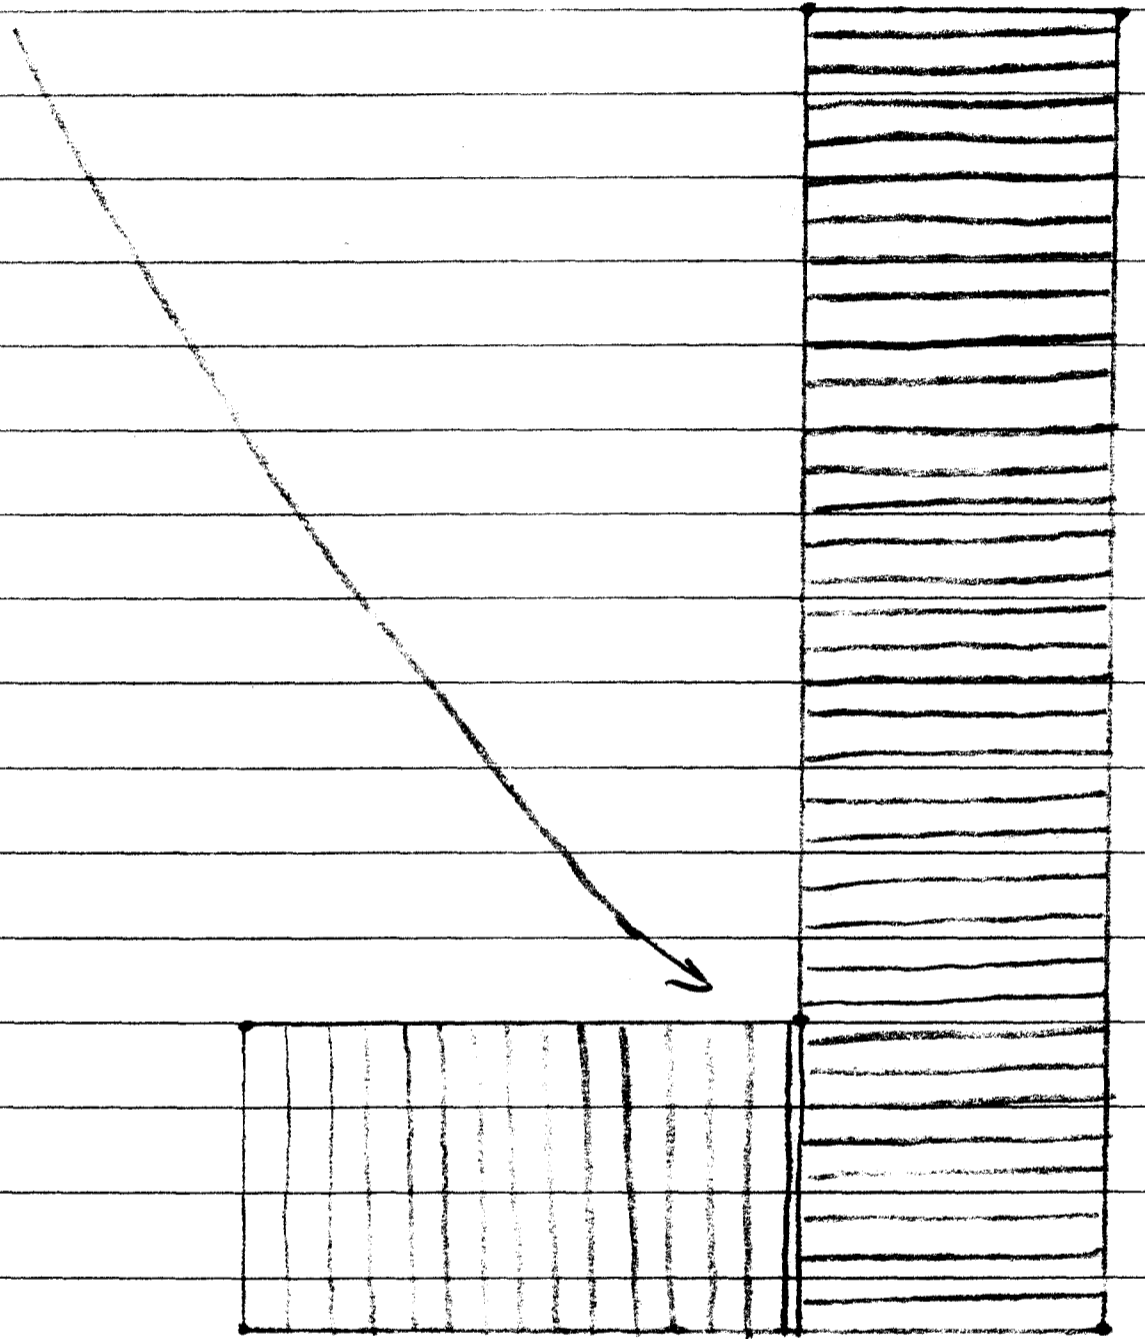


Double Joist

Construction Detail

Decking is to be composite material capable of 16 O.C. framework spacing.

Decking is to be screwed down.

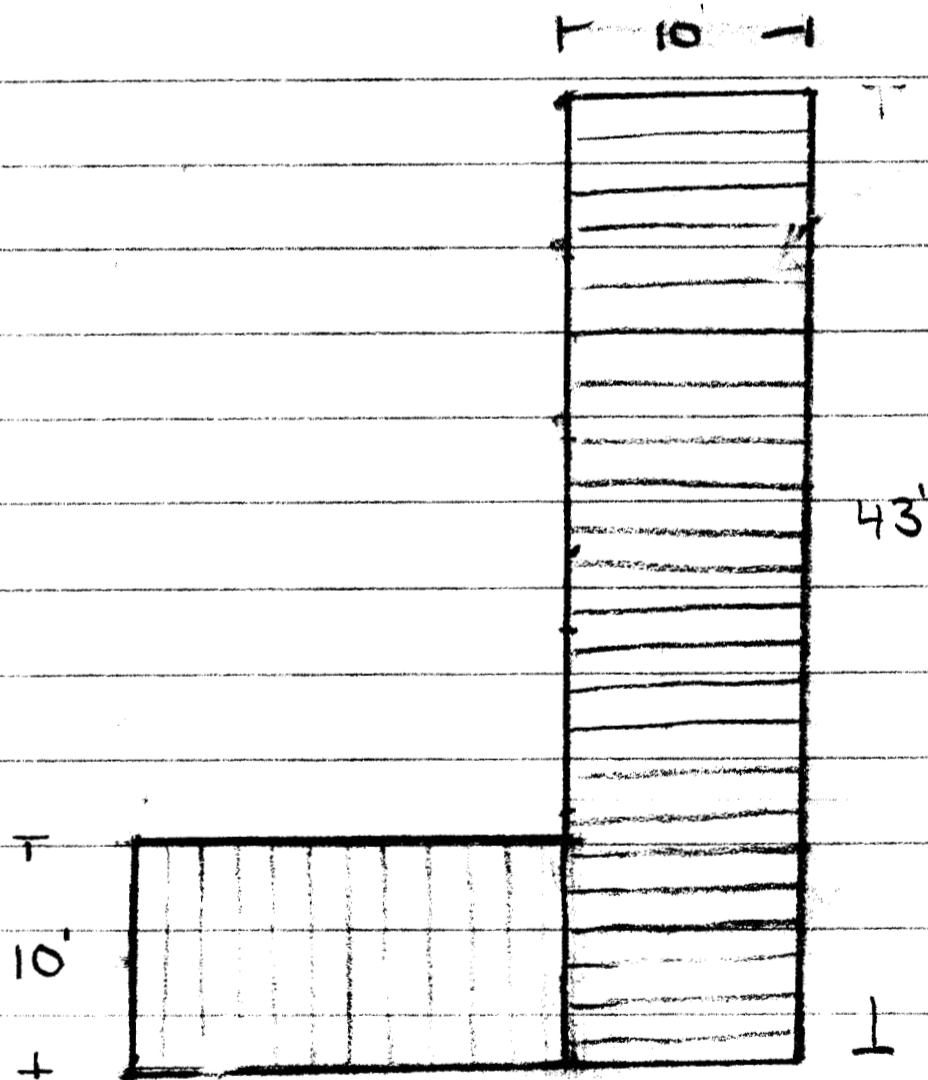


Hand Rail

Railings are to be
42" tall.

Post are to be no
greater than 6'
apart.

Entrance is to be
48".

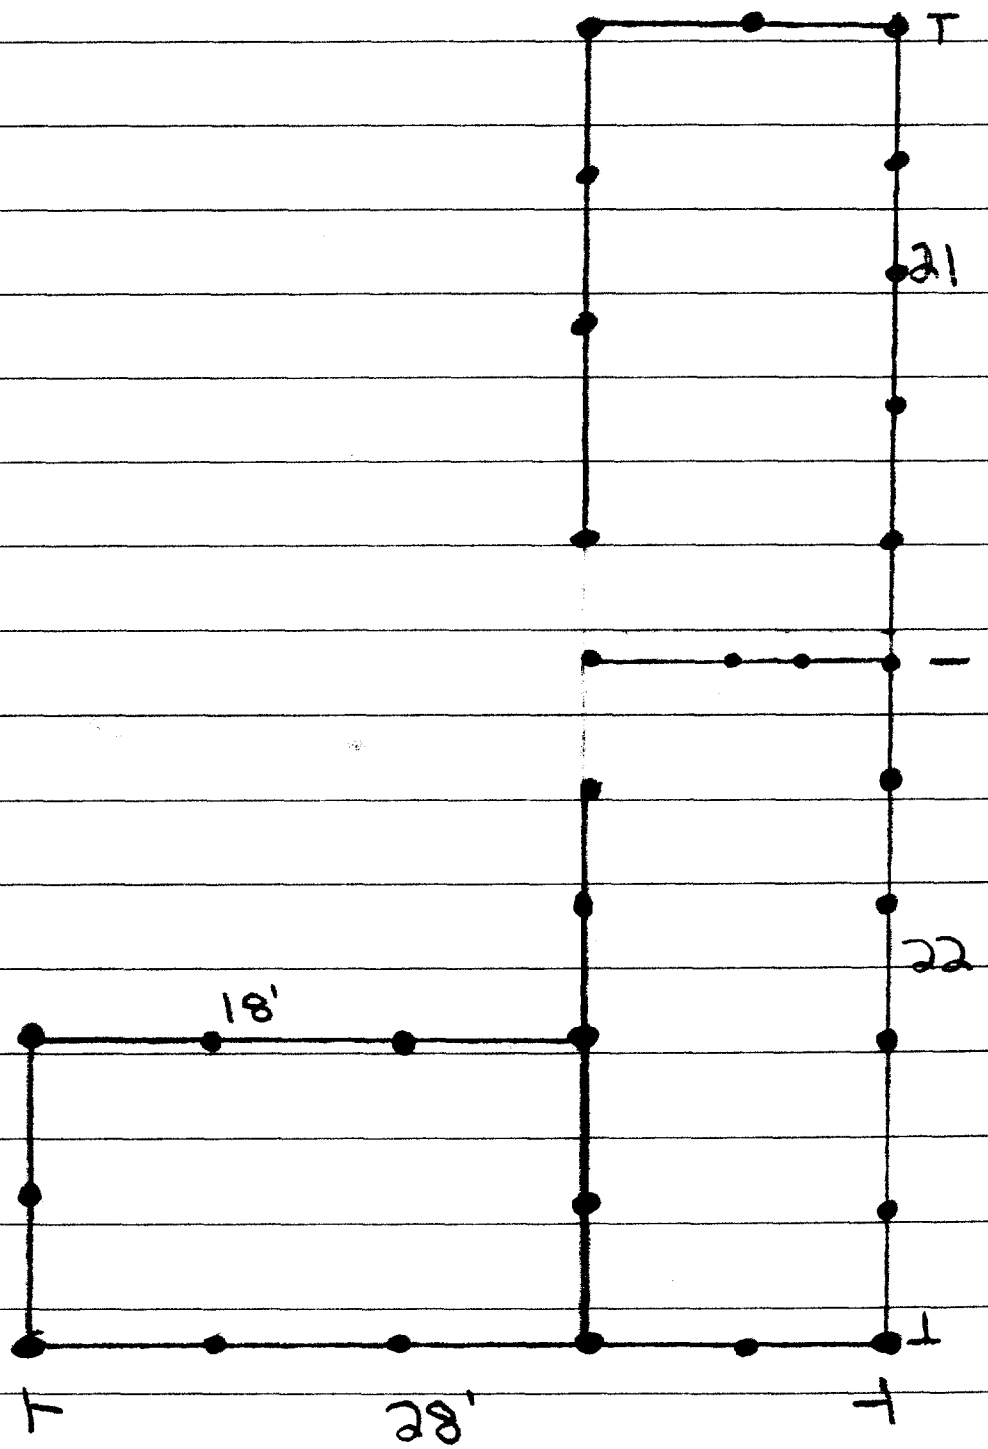


North St.

Floor Plan (Top of Roof)

— 28' —

7' 3'

Deck Area

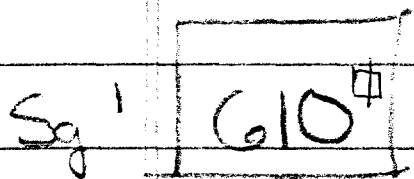

* Deck Frame to
Be set in 12"
from edge of roof.

