LEMIEUX DOORS
www.lemieuxdoors.com
10/07/2014

Document	
Document #	134
Line #	1
Special Comp.	X
Reference #	312259

Door	
Model	C42
Specie	PRIMED
Wood Treatment	NONE
Finish	PRIMED
Woodcore	JOINTED
Bevel door	NONE
Prefit 0.00	Trim 0.00

Certification	
Fire Rated	NONE
Structural	NONE

Molding	
Moulding	SQUARE
Family	NONE
Model	NONE

Glass	
Glass Model	NONE
Glass Finish	NONE
Bevel	NONE
Insulated	NONE
Low-E	NONE

Panel	
Wood	MDF
Design	NONE
Type	FLAT
Thickness	0.500

Curve Top	
Radius	0.000
Height Curve	0.000

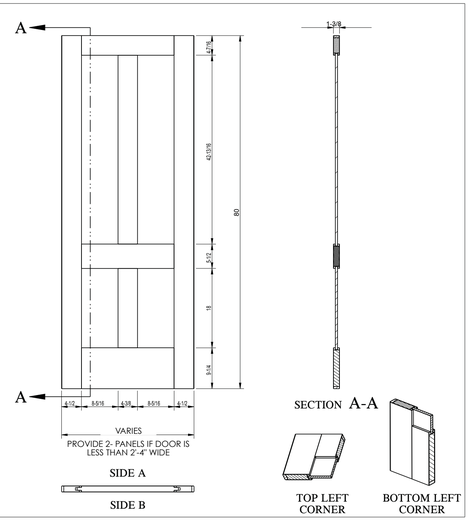

1 LEMIEUX MODIFIED C42 INTERIOR DOOR

INTERIOR DOORS AND FRAMES FOR PAINTED FINISH:

ROGUE VALLEY:

APARTMENT ENTRY AND ELEVATOR ENTRY DOORS: (1 1/2 HOUR): 1 3/4" WOOD PANELS W/ INTUMESCENT CORE, STYLE, STICKING, ETC. TO MATCH LEMIEUX INTERIOR DOORS. PROVIDE PRE-PRIMED. SEE ELEVATION DETAIL THIS SHEET. PROVIDE SHOP DRAWING AND PRODUCT LITERATURE TO ARCHITECT FOR APPROVAL PRIOR TO ORDERING.

ALL REMAINING INTERIOR DOORS: MODIFIED C42 DOOR BY LEMIEUX. SEE ELEVATION DETAIL THIS SHEET

INTERIOR FRAMES FOR PAINTED FINISH:

APARTMENT ENTRY & ELEVATOR ENTRY FRAMES: 1 1/2 HOUR WOOD FRAME, THICKNESS AS REQ'D BY RATING, PRE-PRIMED AND PAINTED (2-TOP COATS) WOOD (NO FINGER JOINTS).

ALL REMAINING INTERIOR FRAMES: 5/4 WOOD PRIMED AND 2-TOP COATS PAINT. NO FINGER JOINTS

HARDWARE: LEVERSET TBD. PROVIDE ALLOWANCE CLOSER (TYP. FOR ALL RATED DOORS): DORMA 8616 ARCHITECTURAL GRADE W/ AF-86P-STANDARD ARM TRI-PACK W/ DK8R-695 DARK BRONZE PAINT FINISH AND HINGES: THERMA-TRU SELF-ALIGNING BALL BEARING FOR FIRE RATED DOORS W/ OIL RUBBED BRONZE FINISH. TYP. OF 3- PER DOOR. PROVIDE SHOP DRAWINGS AND PRODUCT LITERATURE TO ARCHITECT FOR APPROVAL PRIOR TO ORDERING.

DOOR ELEVATIONS

ID	001A	002A	003A	004A	005A
Elevation View	6'-4" / 3'-0"	6'-4" / 3'-0"	6'-4" / 3'-0"	6'-4" / 3'-0"	6'-4" / 3'-0"

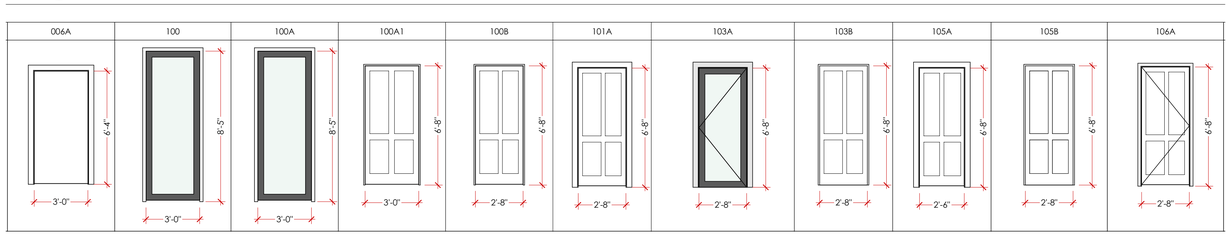

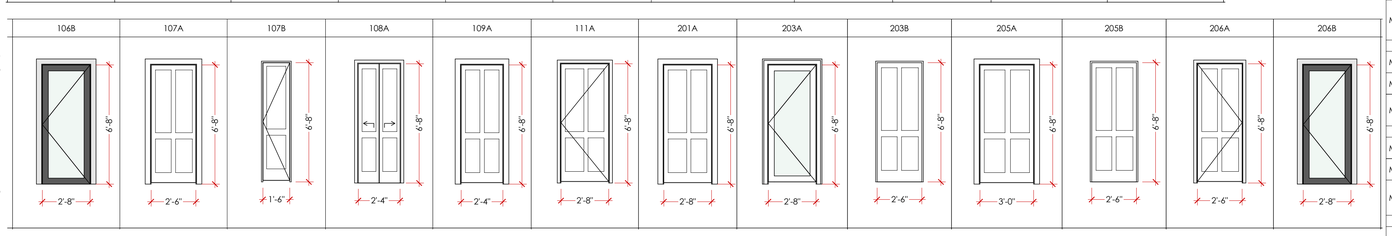

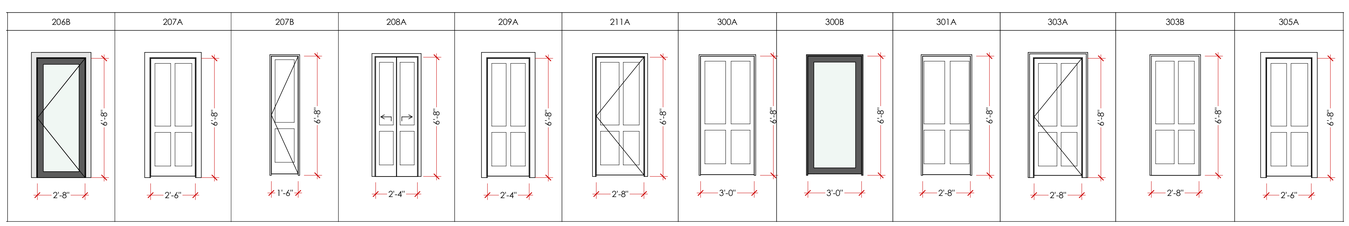

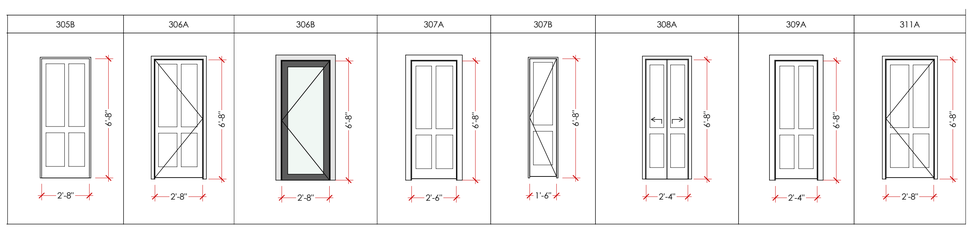

LICENSED ARCHITECT
CALEB M. JOHNSON
NO. 2919
STATE OF MAINE

PERMIT SET

DOOR SCHEDULE

Zone Name	Location	ID	Nom. Size	Material	Manufacturer	Door Finish	Glazing	Hdw Set	Hdw Finish	Notes
ENTRY HALL	GROUND FLOOR	100	3'-0"x8'-5"	Aluminum	TGP for Frame and Door Stiles and Rails. Insul. Glass by others	Pre-finished Black	1" Insul. Argon Filled tempered	TBD. Provide Allowance	TBD. Include in Hardware allowance	Provide 1-hour frame to Match Front Units. Provide narrow stile and rail ALuminum Door w/ insul. glass by others. Provide Keyed Lock w/ Thumb Turn- keyed Dead bolt and closer
1ST FLOOR ENTRY	GROUND FLOOR	100A	3'-0"x8'-5"	Aluminum	TGP for Frame and Door Stiles and Rails. Insul. Glass by others	Pre-finished Black	1" Insul. Argon Filled tempered	TBD. Provide Allowance	TBD. Include in Hardware allowance	Provide 1-hour frame to Match Front Units. Provide narrow stile and rail ALuminum Door w/ insul. glass by others. Provide Keyed Lock w/ Thumb Turn- keyed Dead bolt and closer
1ST FLR. ENTRY	GROUND FLOOR	100A1	3'-0"x6'-8"	WOOD	ROGUE VALLEY	PRE-PRIMED W/ 2-TOP COATS IN FIELD	NO	TBD. Provide Allowance	TBD. Provide Allowance	PROVIDE 1 1/2 HOUR DOOR AND FRAME W/ CLOSER. SEE DOOR NOTES ON THIS SHEET
BASEMENT	BASEMENT	001A	3'-0"x6'-4"	Insulated 4- panel composite	Therma True- SMOOTH STAR	PAINTED	NO	TBD. Provide Allowance	TBD. Include in Hardware allowance	Provide Custom Height Door and Frame, 4-sidedWheatherstripping and Alum. Sill
BATH 2	GROUND FLOOR	107A	2'-6"x6'-8"	WOOD/ MDF	LEMIEUX	PRE-PRIMED W/ 2-TOP COATS PAINT INFIELD	NO	TBD. Provide Allowance	TBD. Provide Allowance	SEE DOOR NOTES AND INTERIOR DOOR DETAIL ELEVATION THIS SHEET. TYP. DOOR U.N.O.
BATH 2	GROUND FLOOR	107B	1'-6"x6'-8"							
BATH 2	SECOND FLOOR	207A	2'-6"x6'-8"							
BATH 2	SECOND FLOOR	207B	1'-6"x6'-8"							
BATH 2	THIRD FLOOR	307A	2'-6"x6'-8"							
BATH 2	THIRD FLOOR	307B	1'-6"x6'-8"							
BED	GROUND FLOOR	111A	2'-8"x6'-8"							
BED	SECOND FLOOR	211A	2'-8"x6'-8"							
BED	THIRD FLOOR	311A	2'-8"x6'-8"							
CLOS.	GROUND FLOOR	105B	2'-8"x6'-8"							
CLOS.	SECOND FLOOR	205B	2'-6"x6'-8"							
CLOS.	THIRD FLOOR	305B	2'-8"x6'-8"							
DECK	ROOF	300B	3'-0"x6'-8"							
ENTRY HALL	GROUND FLOOR	100B	2'-8"x6'-8"							
LIVING ROOM	GROUND FLOOR	101A	2'-8"x6'-8"	WOOD	ROGUE VALLEY	PRE-PRIMED W/ 2-TOP COATS IN FIELD	NO	TBD. Provide Allowance	TBD. Provide Allowance	PROVIDE 1 1/2 HOUR DOOR AND FRAME W/ CLOSER. SEE DOOR NOTES ON THIS SHEET
LIVING ROOM	SECOND FLOOR	201A	2'-8"x6'-8"	WOOD	ROGUE VALLEY	PRE-PRIMED W/ 2-TOP COATS IN FIELD	NO	TBD. Provide Allowance	TBD. Provide Allowance	PROVIDE 1 1/2 HOUR DOOR AND FRAME W/ CLOSER. SEE DOOR NOTES ON THIS SHEET
LIVING ROOM	THIRD FLOOR	300A	3'-0"x6'-8"	WOOD	ROGUE VALLEY	PRE-PRIMED W/ 2-TOP COATS IN FIELD	NO	TBD. Provide Allowance	TBD. Provide Allowance	PROVIDE 1 1/2 HOUR DOOR AND FRAME W/ CLOSER. SEE DOOR NOTES ON THIS SHEET
LIVING ROOM	THIRD FLOOR	301A	2'-8"x6'-8"	WOOD	ROGUE VALLEY	PRE-PRIMED W/ 2-TOP COATS IN FIELD	NO	TBD. Provide Allowance	TBD. Provide Allowance	PROVIDE 1 1/2 HOUR DOOR AND FRAME W/ CLOSER. SEE DOOR NOTES ON THIS SHEET
MASTER BED	GROUND FLOOR	105A	2'-6"x6'-8"	WOOD/ MDF	LEMIEUX	PRE-PRIMED W/ 2-TOP COATS PAINT INFIELD	NO	TBD. Provide Allowance	TBD. Provide Allowance	SEE DOOR NOTES AND INTERIOR DOOR DETAIL ELEVATION THIS SHEET. TYP. TYP. DOOR U.N.O.
MASTER BED	GROUND FLOOR	106A	2'-8"x6'-8"							
MASTER BED	GROUND FLOOR	106B	2'-8"x6'-8"	WOOD-ULTREX	MARVIN	ULTREX EXTERIOR/ WOOD INTERIOR	YES	TBD. Provide Allowance	TBD. Provide Allowance	GLASS SHALL BE L2 INSUL. LOW-E ARGON FILLED. HRDWRE SHALL BE SATIN NICKEL FINISH. EXT. DR. HRDWR SHALL BE NORTHFIELD COLLECTION.
MASTER BED	SECOND FLOOR	205A	3'-0"x6'-8"							
MASTER BED	SECOND FLOOR	206A	2'-6"x6'-8"							
MASTER BED	SECOND FLOOR	206B	2'-8"x6'-8"	WOOD-ULTREX	MARVIN	ULTREX EXTERIOR/ WOOD INTERIOR	YES	TBD. Provide Allowance	TBD. Provide Allowance	GLASS SHALL BE L2 INSUL. LOW-E ARGON FILLED. HRDWRE SHALL BE SATIN NICKEL FINISH. EXT. DR. HRDWR SHALL BE NORTHFIELD COLLECTION.
MASTER BED	THIRD FLOOR	305A	2'-6"x6'-8"							
MASTER BED	THIRD FLOOR	306A	2'-8"x6'-8"							
MASTER BED	THIRD FLOOR	306B	2'-8"x6'-8"	WOOD-ULTREX	MARVIN	ULTREX EXTERIOR/ WOOD INTERIOR	YES	TBD. Provide Allowance	TBD. Provide Allowance	GLASS SHALL BE L2 INSUL. LOW-E ARGON FILLED. HRDWRE SHALL BE SATIN NICKEL FINISH. EXT. DR. HRDWR SHALL BE NORTHFIELD COLLECTION.
MUDROOM	GROUND FLOOR	103A	2'-8"x6'-8"	WOOD-ULTREX	MARVIN	ULTREX EXTERIOR/ WOOD INTERIOR	YES	TBD. Provide Allowance	TBD. Provide Allowance	GLASS SHALL BE L2 INSUL. LOW-E ARGON FILLED. HRDWRE SHALL BE SATIN NICKEL FINISH. EXT. DR. HRDWR SHALL BE NORTHFIELD COLLECTION.
MUDROOM	GROUND FLOOR	103B	2'-8"x6'-8"							
MUDROOM	SECOND FLOOR	203A	2'-8"x6'-8"	WOOD-ULTREX	MARVIN	ULTREX EXTERIOR/ WOOD INTERIOR	YES	TBD. Provide Allowance	TBD. Provide Allowance	GLASS SHALL BE L2 INSUL. LOW-E ARGON FILLED. HRDWRE SHALL BE SATIN NICKEL FINISH. EXT. DR. HRDWR SHALL BE NORTHFIELD COLLECTION.
MUDROOM	SECOND FLOOR	203B	2'-6"x6'-8"							
MUDROOM	THIRD FLOOR	303A	2'-8"x6'-8"	WOOD-ULTREX	MARVIN	ULTREX EXTERIOR/ WOOD INTERIOR	YES	TBD. Provide Allowance	TBD. Provide Allowance	GLASS SHALL BE L2 INSUL. LOW-E ARGON FILLED. HRDWRE SHALL BE SATIN NICKEL FINISH. EXT. DR. HRDWR SHALL BE NORTHFIELD COLLECTION.
MUDROOM	THIRD FLOOR	303B	2'-8"x6'-8"							
PWDR. RM.	GROUND FLOOR	108A	2'-4"x6'-8"							
PWDR. RM.	GROUND FLOOR	109A	2'-4"x6'-8"							
PWDR. RM.	SECOND FLOOR	208A	2'-4"x6'-8"							
PWDR. RM.	SECOND FLOOR	209A	2'-4"x6'-8"							
PWDR. RM.	THIRD FLOOR	308A	2'-4"x6'-8"							
PWDR. RM.	THIRD FLOOR	309A	2'-4"x6'-8"							
STAIR	BASEMENT	002A	3'-0"x6'-4"							
STAIR	BASEMENT	003A	3'-0"x6'-4"							
STORAGE	BASEMENT	004A	3'-0"x6'-4"							
STORAGE	BASEMENT	005A	3'-0"x6'-4"							
STORAGE	BASEMENT	006A	3'-0"x6'-4"							

CALEB JOHNSON
ARCHITECTS + BUILDERS
265 MAIN STREET, SUITE 201 BIDDEFORD, ME 04005 C.JAB.ME
T: 207.283.8777 F: 207.283.8778

STUDIO MANAGER:
PROJECT ARCHITECT:

CHANGES THIS ISSUE:

ID	DESCRIPTION

ISSUE NUMBER / CHANGE NUMBER

ISSUE	DESCRIPTION

SUBMISSIONS:

ISSUE	DATE

CONSULTANTS:
#STRUCTURAL ENGINEER: #STRUCTURAL INTEGRITY CONSULTING ENGINEERS, INC
#CIVIL ENGINEER: #DAVID BUSTIN PORTLAND, METCAPTOT
#AARON JONES

DRAFTSPERSON: Michael Chestnutt
DATE OF ISSUE: 2017-07-17
PROJECT STATUS: PRELIMINARY DESIGN

GRISANTI - MUNJOY ST

SUSAN GRISANTI
60 MUNJOY ST PORTLAND ME 04101

DOOR SCHEDULE AND ELEVATIONS

A-1.4

/Volumes/Network Files/CJAB/PROJECTS/B COMMERCIAL STUDIO/1 Current Projects/Grisanti Munjoy St/1 DESIGN/DRAWINGS/5 CD/ARCHICAD/Grisanti CD NEW EXIT STAIR OPTION 2 4.27.17.pln