


1. COMPACT SUBGRADE TO 95% MAXIMUM DRY DENSITY IN ACCORDANCE WITH ASTM D-1557. 2. ARTERIAL BITUMINOUS PAVEMENT PROFILE APPLIES ONLY WITHIN ANDERSON STREET R.O.W.

	THICKNESS OF LAYERS
STANDARD	LAYERS
2"	SURFACE COURSE MDOT 403.09 GRADE C (12.5mm)
3"	BINDER COURSE MDOT 403.09 GRADE B (19mm)
6"	AGGREGATE BASE GRAVEL MDOT 703.06 TYPE B
18"	AGGREGATE SUBBASE GRAVEL MDOT 703.06 TYPE D

CITY OF PORTLAND ARTERIAL BITUMINOUS PAVEMENT PROFILE: ANDERSON STREET NOT TO SCALE

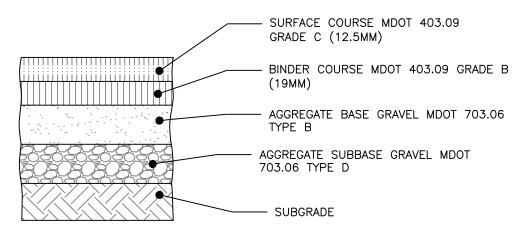


NOTES:

 COMPACT SUBGRADE TO 95% MAXIMUM DRY DENSITY IN ACCORDANCE WITH ASTM D-1557
LOCAL BITUMINOUS PAVEMENT PROFILE APPLIES TO THE SITE DRIVEWAY & EAST LANCASTER STREET

	THICKNESS OF LAYERS
STANDARD	LAYERS
1-1/2"	SURFACE COURSE MDOT 403.09 GRADE C (12.5mm)
2"	BINDER COURSE MDOT 403.09 GRADE B (19mm)
3"	AGGREGATE BASE GRAVEL MDOT 703.06 TYPE B
15"	AGGREGATE SUBBASE GRAVEL MDOT 703.06 TYPE D

LOCAL BITUMINOUS PAVEMENT PROFILE: <u>EAST LANCASTER STREET</u> <u>PRIVATE PARKING LOT</u> NOT TO SCALE

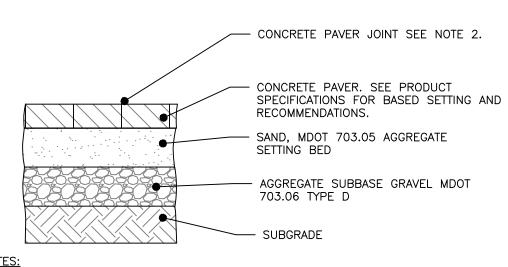

NOTES:

- 1. COMPACT AGGREGATE MATERIALS AND SUBGRADE TO 95% MAXIMUM DRY DENSITY IN ACCORDANCE WITH ASTM D-1557
- 2. CONCRETE PAVER JOINTS SHALL BE FILLED WITH ALLIANCE GATOR XP POLY SAND OR APPROVED EQUAL.
- 3. CONTRACTOR TO COORDINATE WITH LANDSCAPE ARCHITECT FOR CONCRETE PAVER PRODUCT, INSTALLATION PATTERN AND JOINT SAND COLOR.
- 4. CONCRETE PAVERS TO BE MANUFACTURED BY GENEST KATAHDIN OR AN APPROVED EQUAL.

	THICKNESS OF LAYERS	
STANDARD	LAYERS	
2-3/8"	CONCRETE PAVER	
4"	SAND MDOT 703.05 AGGREGATE	
15"	AGGREGATE SUBBASE GRAVEL MDOT 703.06 TYPE D	

CONCRETE BRICK PAVER PROFILE NOT TO SCALE

