City of Portland, Maine - Building or Use Permit Application 389 Congress Street, 04101, Tel: (207) 874-8703, FAX: 874-8716 Location of Construction: Owner: Phone: Permit No: 191 Marginal Way Noves, EArl W. & Sons Owner Address: Lessee/Buyer's Name: Phone: BusinessName: NAPA Auto Parts Permit Issued: Phone: Contractor Name: Address: Sign Design So. Portland, ME 743 Broadway 799-2000 **COST OF WORK:** PERMIT FEE: Past Use: Proposed Use: 29.30 **FIRE DEPT.** □ Approved INSPECTION: Retail Same ☐ Denied Use Group: Type: CBL: Zone: 024-C-021 Signature: Signature: Zoning Approval: Proposed Project Description: PEDESTRIAN ACTIVITIES DISTRICT (P.A.D.) Action: Approved Special Zone or Reviews: Approved with Conditions: ☐ Shoreland Denied ☐ Wetland Erect Signage ☐ Flood Zone □ Subdivision Signature: Date: ☐ Site Plan maj ☐minor ☐mm ☐ Permit Taken By: Date Applied For: Mary Gresik 25 June 1997 Zoning Appeal □ Variance This permit application does not preclude the Applicant(s) from meeting applicable State and Federal rules. 1. ☐ Miscellaneous Building permits do not include plumbing, septic or electrical work. ☐ Conditional Use Building permits are void if work is not started within six (6) months of the date of issuance. False informa-☐ Interpretation 3. □ Approved tion may invalidate a building permit and stop all work... □ Denied Historic Preservation □ Not in District or Landmark ☐ Does Not Require Review ☐ Requires Review Action: **CERTIFICATION** ☐ Appoved I hereby certify that I am the owner of record of the named property, or that the proposed work is authorized by the owner of record and that I have been ☐ Approved with Conditions ☐ Denied authorized by the owner to make this application as his authorized agent and I agree to conform to all applicable laws of this jurisdiction. In addition, if a permit for work described in the application is issued, I certify that the code official's authorized representative shall have the authority to enter all Date: areas covered by such permit at any reasonable hour to enforce the provisions of the code(s) applicable to such permit 25 June 1997 ADDRESS: DATE: PHONE: SIGNATURE OF APPLICANT Dan Flannery PHONE: RESPONSIBLE PERSON IN CHARGE OF WORK, TITLE **CEO DISTRICT**

White-Permit Desk Green-Assessor's Canary-D.P.W. Pink-Public File Ivory Card-Inspector

POLT

3/21/95

STRUCTURAL COMPONENTS.

SIGNAGE APPLICATION

IAI MAYAL	nal war			
ADDRESS: 191 Margi	TICH WUN			
OWNER: NUMA AUC	parts	Earh w. 17	ayes & Jones	
APPLICANT: TR 5191	Design,	FAC	'	
ASSESSORS NO.:	034-6-0	0,2/		
SINGLE TENANT LOT? YES	5:	140:		
MULTI-TENANT LOT? YES	5:	NC:		
FREESTANDING SIGN? YES			DIMENSIONS:	
MOF	E THAN ONE SIG	3N?	DIMENSIONS:	
BLDG. WALL SIGN? YES	6:	NO:	DIMENSIONS: 2-6" 18-134	
MOR	E THAN ONE SIG	EN? NO	DIMENSIONS: Z.5 X 8,66 7	
LIST ALL EXISTING SIGNAGE, INCLUDING THEIR DIMENSIONS:				
565	E ATTACHED			
			() l	
LOT FRONTAGE (IN FEET):	250	1		
BLDG FRONTAGE (IN FEET)	: 67	12-+ 134	中 / ·	
	,	\	CKLIT? YES: NO:	
HEIGHT OF AWN1				
IS THERE ANY C	OMM. MESSAGE,	TRADEMARK; OR S	SYMBOL ON 1T?	
PLEASE PROVIDE A SITE S	SKETCH <u>AND</u> A BL	JILDING SKETCH,	SHOWING EXACTLY WHERE	
EXISTING AND NEW SIGNAGE IS LOCATED.				
WE WILL NEED SKETCHES A	ND/OR PICTURES	OF THE PROPOSE	ED SIGNS INCLUDING	

H: SIGNLST

BUILDING PERMIT REPORT


DATE: 30 June 97 ADDRESS: 19/1 Arging / Wo	a y
REASON FOR PERMIT: To Crect Sign	
BUILDING OWNER: Noyes, Gar/	
CONTRACTOR: Sign Design	
PERMIT APPLICANT: Dan Flannery APPROVAL: 4/	DENIE D

CONDITION(S) OF APPROVAL

This permit does not excuse the applicant from meeting applicable State and Federal rules and laws.

- 2. Before concrete for foundation is placed, approvals from the Development Review Coordinator and Inspection Services must be obtained. (A 24 hour notice is required prior to inspection)
- 3. Precaution must be taken to protect concrete from freezing.
- 4. It is strongly recommended that a registered land surveyor check all foundation forms before concrete is placed. This is done to verify that the proper setbacks are maintained.
- 5. Private garages located beneath habitable rooms in occupancies in Use Group R-1, R-2, R-3 or I-1 shall be separated from adjacent interior spaces by fire partitions and floor/ceiling assembly which are constructed with not less than 1-hour fire resisting rating. Private garages attached side-by-side to rooms in the above occupancies shall be completely separated from the interior spaces and the attic area by means of ½ inch gypsum board or the equivalent applied to the garage means of ½ inch gypsum board or the equivalent applied to the garage side. (Chapter 4 Section 407.0 of the BOCA/1996)
- 6. All chimneys and vents shall be installed and maintained as per Chapter 12 of the City's Mechanical Code. (The BOCA National Mechanical Code/1993) U.L. 103.
- 7. Sound transmission control in residential building shall be done in accordance with Chapter 12 section 1214.0 of the city's building code.
- 8. Guardrail & Handrails A guardrail system is a system of building components located near the open sides of elevated walking surfaces for the purpose of minimizing the possibility of an accidental fall from the walking surface to the lower level. Minimum height all Use Groups 42", except Use Group R which is 36". In occupancies in Use Group A, B, H-4, I-1, I-2 M and R and public garages and open parking structures, open guards shall have balusters or be of solid material such that a sphere with a diameter of 4" cannot pass through any opening. Guards shall not have an ornamental pattern that would provide a ladder effect.
- 9. Headroom in habitable space is a minimum of 7'6".
- 10. Stair construction in Use Group R-3 & R-4 is a minimum of 10" tread and 7 3/4" maximum rise. All other Use group minimum 11" tread. 7" maximum rise.
- 11. The minimum headroom in all parts of a stairway shall not be less than 80 inches.
- 12. Every sleeping room below the fourth story in buildings of use Groups R and I-1 shall have at least one operable window or exterior door approved for emergency egress or rescue. The units must be operable from the inside without the use of special knowledge or separate tools. Where windows are provided as means of egress or rescue they shall have a sill height not more than 44 inches (1118mm) above the floor. All egress or rescue windows from sleeping rooms shall have a minimum net clear opening height dimension of 24 inches (610mm). The minimum net clear opening width dimension shall be 20 inches (508mm), and a minimum net clear opening of 5.7 sq. ft.
- 13. Each apartment shall have access to two (2) separate, remote and approved means of egress. A single exit is acceptable when it exits directly from the apartment to the building exterior with no communications to other apartment units.
- 14. All vertical openings shall be enclosed with construction having a fire rating of at lest one (1)hour, including fire doors with self closer's.
- 15. The boiler shall be protected by enclosing with (1) hour fire-rated construction including fire doors and ceiling, or by providing automatic extinguishment.
- All single and multiple station smoke detectors shall be of an approved type and shall be installed in accordance with the provisions of the City's Building Code Chapter 9, Section 19, 920.3.2 (BOCA National Building Code/1996), and NFPA 101 Chapter 18 & 19. (Smoke detectors shall be installed and maintained at the following locations):
 - In the immediate vicinity of bedrooms
 - In all bedrooms
 - In each story within a dwelling unit, including basements

In addition to the required AC primary power source, required smoke detectors in occupancies in Use Groups R-2, P-2 and

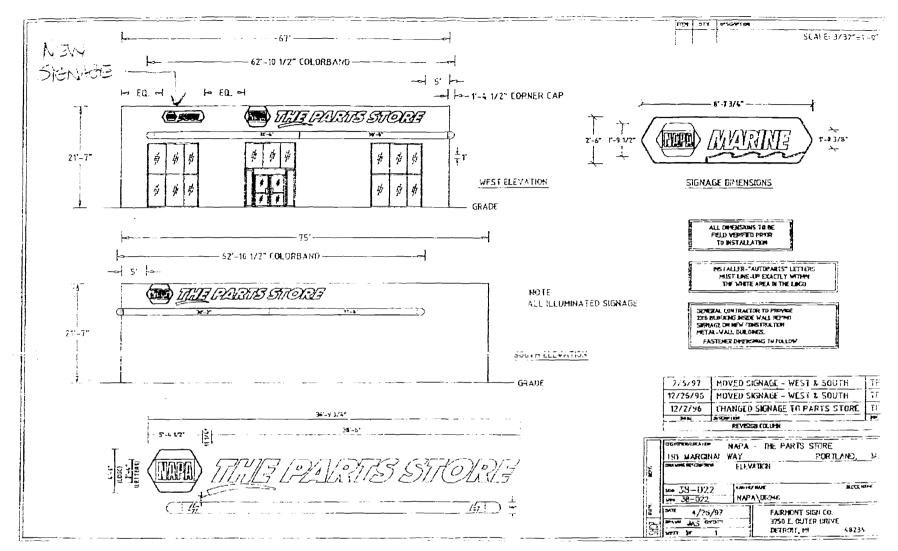

EXISTING 1 (2) 71-41/ 30-611 (2) 41-61/ 51-61