

WINDOW SCHEDULE

| Unit | Style | MFGR | Description | Width | Height | Notes | above subfloor | Temp. | Egress | U-factor | SHGC | VLT |
|------|-----------------|-------|--|-------------|-------------|---|-------------------|-------|--------|----------|------|-----|
| A | Casement | TBD | LH | 2'-8 1/2" | 5'-6" | | V.I.F. | NO | YES | U≤0.30 | TBD | |
| B | Fixed | TBD | Fixed | 1'-4 1/2" | 5'-6" | | V.I.F. | NO | NO | U≤0.30 | TBD | |
| C | Casement | TBD | LH | 3'-3 1/4" | 5'-6" | | V.I.F. | NO | YES | U≤0.30 | TBD | |
| D | Mulled Casement | TBD | 3-Unit, Factory Mull, LH-Fixed-RH | 6'-6" | 3'-3 1/4" | | V.I.F. | NO | NO | U≤0.30 | TBD | |
| E | Casement | TBD | LH | 2'-8 1/2" | 5'-4 1/2" | | V.I.F. | NO | YES | U≤0.30 | TBD | |
| E1 | Casement | TBD | RH | 2'-8 1/2" | 5'-4 1/2" | | V.I.F. | YES | YES | U≤0.30 | TBD | |
| F | Casement | TBD | LH | 3'-3 1/4" | 5'-4 1/2" | | V.I.F. | NO | YES | U≤0.30 | TBD | |
| G | Fixed | TBD | Fixed | 1'-4 1/2" | 5'-4 1/2" | | V.I.F. | NO | NO | U≤0.30 | TBD | |
| H1 | Casement | TBD | LH - MC1 7512 | 2'-5 1/2" | 3'-11 1/4" | | Match Existing HH | NO | YES | U≤0.30 | TBD | |
| H2 | Casement | TBD | RH - MC1 7512 | 2'-5 1/2" | 3'-11 1/4" | | Match Existing HH | NO | YES | U≤0.30 | TBD | |
| I | Awning | TBD | AW1 0506 | 1'-7 11/16" | 1'-11 5/8" | | Match Existing HH | NO | NO | U≤0.30 | TBD | |
| J | Mulled Casement | TBD | 3-Unit, Factory Mull, LH-Fixed-RH MC1 0815 | 8'-6 1/2" | 4'-11 1/16" | | Match Existing HH | NO | YES | U≤0.30 | TBD | |
| K | Skylight | Velux | VS-M06 Venting skylight | 2'-6 9/16" | 3'-10 1/4" | Integrated manual blackout shade, color tbd | | | | | | |
| L | Casement | TBD | LH | 2'-9 3/4" | 5'-3 1/4" | | V.I.F. | NO | YES | U≤0.30 | TBD | |
| M | Skylight | Velux | VS-M02 Venting skylight | 2'-6 9/16" | 2'-6 1/2" | Integrated manual blackout shade, color tbd | | | | | | |
| N | Awning | TBD | | 2'-8 1/2" | 3'-0 1/2" | | Match Existing HH | NO | NO | U≤0.30 | TBD | |

- Notes:
1. Combo unit mulling location: factory
 2. Glazing: Triple-glazed, Low-E/Clear/Low-E, Argon Gas
 3. Performance: U-value <= 0.30 BTU/(hr.ft2.F) SHGC <=
 4. Hardware: TBD
 5. Insect screen: Gray
 6. Exterior: Aluminum, Color TBD
 7. Interior: Natural finish
 8. All window sizes to be confirmed by contractor in field prior to order.


DOOR SCHEDULE

| EXTERIOR DOORS | | | | | | | | | | | |
|----------------|-------|------|----------------------|----------------|--------|-------|-------|----------|------|--|-----|
| Unit | Style | MFGR | Description | Door unit size | | Notes | Swing | Glazing | | | |
| | | | | Width | Height | | | U-factor | SHGC | | VLT |
| 101a | Entry | TBD | Sidelights + Transom | 5'-0" | 6'-8" | | LHIS | | | | |
| 104a | Entry | TBD | | 2'-8" | 6'-8" | | RHIS | | | | |
| INTERIOR DOORS | | | | | | | | | | | |
| Unit | Style | MFGR | Description | Door slab size | | Notes | Swing | Glazing | | | |
| | | | | Width | Height | | | U-factor | SHGC | | VLT |

- Ext. Door Notes:
1. Combo unit mulling location: factory
 2. Glazing: Triple-insulated, Low-E/Clear/Low-E, Argon Gas
 3. Performance: U-value <= 0.30 BTU/(hr.ft2.F) SHGC <=
 4. Hardware: TBD
 5. Insect screen: Gray
 6. Exterior: TBD
 7. Interior: TBD
 8. All door sizes to be confirmed by contractor in field prior to order.

- Int. Door Notes:
1. Hardware: TBD
 2. Panel type, TBD
 3. Slab material, See Schedule
 4. All door sizes to be confirmed by contractor in field prior to order.

KEY

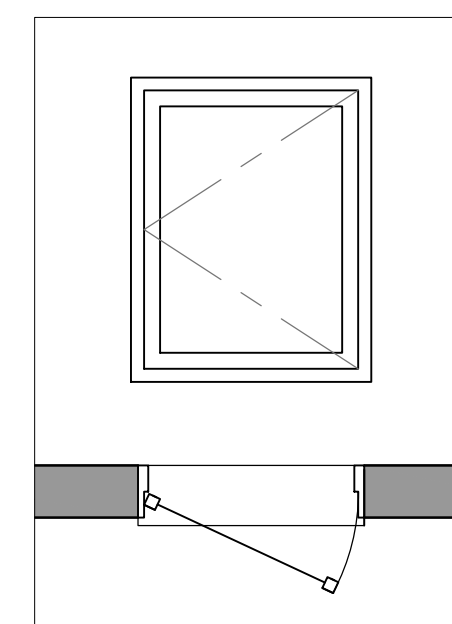

NOTE:
WINDOW/DOOR OPERATION IS INDICATED BY DASHED LINE, POINT OF ARROW INDICATES PANEL SIDE WITH HINGES

PLUMBING SCHEDULE

| |
|--|
| |
|--|

ELECTRICAL SCHEDULE

| |
|--|
| |
|--|

FINISH SCHEDULE

| |
|--|
| |
|--|