

WINDOW SCHEDULE

Unit	Style	MFGR	Description	Width	Height	Notes	above subfloor	Temp.	Egress	U-factor	SHGC	VLT
A	Casement	TBD	LH	2'-8 1/2"	5'-6"		V.I.F.	NO	YES	U≤0.30	TBD	
B	Fixed	TBD	Fixed	1'-4 1/2"	5'-6"		V.I.F.	NO	NO	U≤0.30	TBD	
C	Casement	TBD	LH	3'-3 1/4"	5'-6"		V.I.F.	NO	YES	U≤0.30	TBD	
D	Mulled Casement	TBD	3-Unit, Factory Mull, LH-Fixed-RH	6'-6"	3'-3 1/4"		V.I.F.	NO	NO	U≤0.30	TBD	
E	Casement	TBD	LH	2'-8 1/2"	5'-4 1/2"		V.I.F.	NO	YES	U≤0.30	TBD	
E1	Casement	TBD	RH	2'-8 1/2"	5'-4 1/2"		V.I.F.	YES	NO	U≤0.30	TBD	
F	Casement	TBD	LH	3'-3 1/4"	5'-4 1/2"		V.I.F.	NO	YES	U≤0.30	TBD	
G	Fixed	TBD	Fixed	1'-4 1/2"	5'-4 1/2"		V.I.F.	NO	NO	U≤0.30	TBD	
H1	Casement	TBD	LH - MC1 7512	2'-5 1/2"	3'-11 1/4"		Match Existing HH	NO	YES	U≤0.30	TBD	
H2	Casement	TBD	RH - MC1 7512	2'-5 1/2"	3'-11 1/4"		Match Existing HH	NO	YES	U≤0.30	TBD	
I	Awning	TBD	AW1 0506	1'-7 11/16"	1'-11 5/8"		Match Existing HH	NO	NO	U≤0.30	TBD	
J	Mulled Casement	TBD	3-Unit, Factory Mull, LH-Fixed-RH MC1 0815	8'-6 1/2"	4'-11 1/16"		Match Existing HH	NO	YES	U≤0.30	TBD	
K	Skylight	Velux	VS-M06 Venting skylight	2'-6 9/16"	3'-10 1/4"	Integrated manual blackout shade, color tbd						
L	Casement	TBD	LH	2'-9 3/4"	5'-3 1/4"		V.I.F.	NO	YES	U≤0.30	TBD	
M	Skylight	Velux	VS-M02 Venting skylight	2'-6 9/16"	2'-6 1/2"	Integrated manual blackout shade, color tbd						
N	Awning	TBD		2'-8 1/2"	3'-0 1/2"		Match Existing HH	NO	NO	U≤0.30	TBD	

- Notes:
- All windows to be replaced except at existing rear addition
 - Combo unit mulling location: factory
 - Glazing: Triple-glazed, Low-E/Clear/Low-E, Argon Gas
 - Performance: U-value <= 0.30 BTU/(hr.ft2.F) SHGC <=
 - Hardware: TBD
 - Insect screen: Gray
 - Exterior: Aluminum, Color TBD
 - Interior: Natural finish
 - All window sizes to be confirmed by contractor in field prior to order.


DOOR SCHEDULE

EXTERIOR DOORS											
Unit	Style	MFGR	Description	Door unit size		Notes	Swing	U-factor	SHGC	Glazing	
				Width	Height						
101a	Entry	TBD	Sidelights + Transom	5'-0"	6'-8"		LHIS				
104a	Entry	TBD		2'-8"	6'-8"		RHIS				
INTERIOR DOORS											
Unit	Style	MFGR	Description	Door slab size		Notes	Swing	U-factor	SHGC	Glazing	
				Width	Height						

- Ext. Door Notes:
- Combo unit mulling location: factory
 - Glazing: Triple-insulated, Low-E/Clear/Low-E, Argon Gas
 - Performance: U-value <= 0.30 BTU/(hr.ft2.F) SHGC <=
 - Hardware: TBD
 - Insect screen: Gray
 - Exterior: TBD
 - Interior: TBD
 - All door sizes to be confirmed by contractor in field prior to order.

- Int. Door Notes:
- Hardware: TBD
 - Panel type, TBD
 - Slab material, See Schedule
 - All door sizes to be confirmed by contractor in field prior to order.

KEY

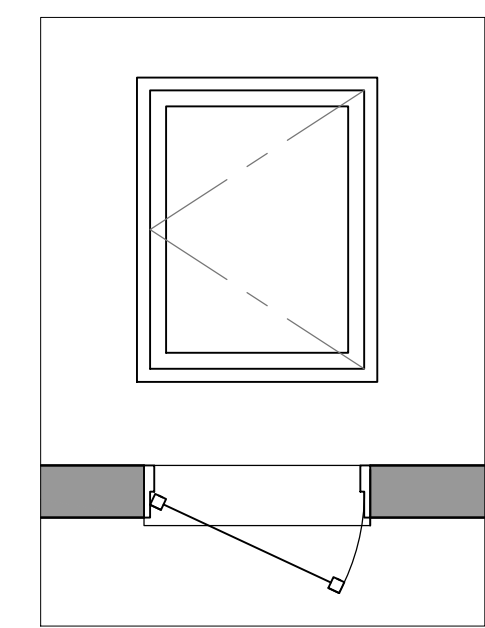

NOTE:
WINDOW/DOOR OPERATION IS INDICATED BY DASHED LINE, POINT OF ARROW INDICATES PANEL SIDE WITH HINGES

PLUMBING SCHEDULE

--

ELECTRICAL SCHEDULE

--

FINISH SCHEDULE

--