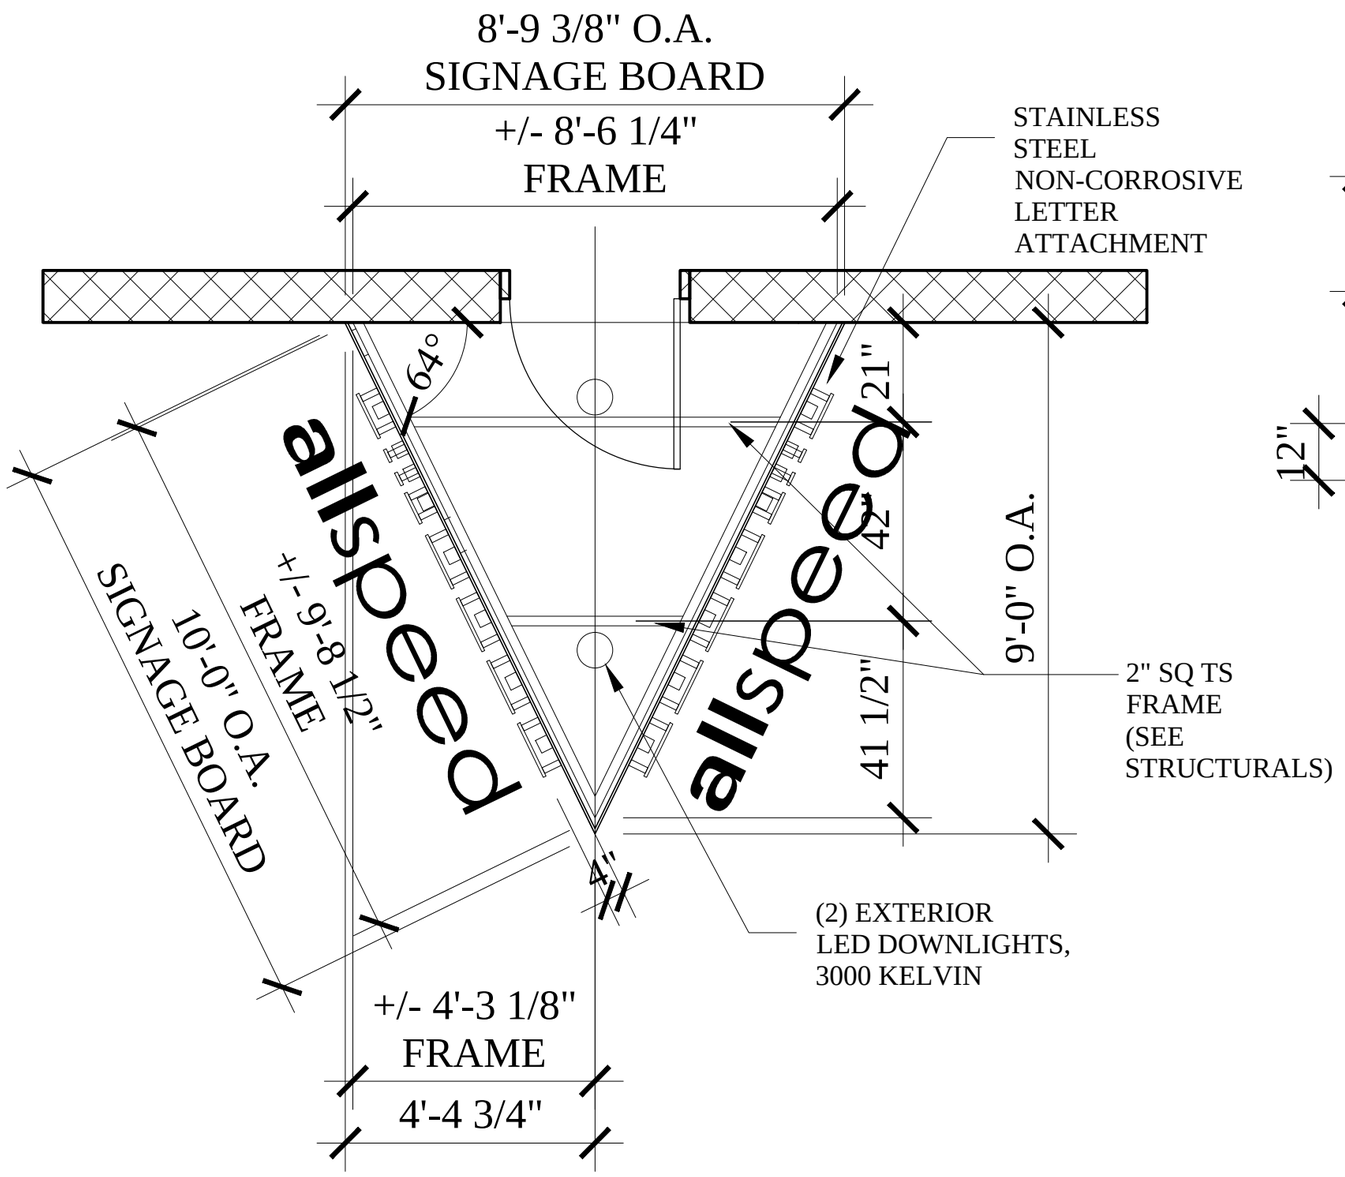

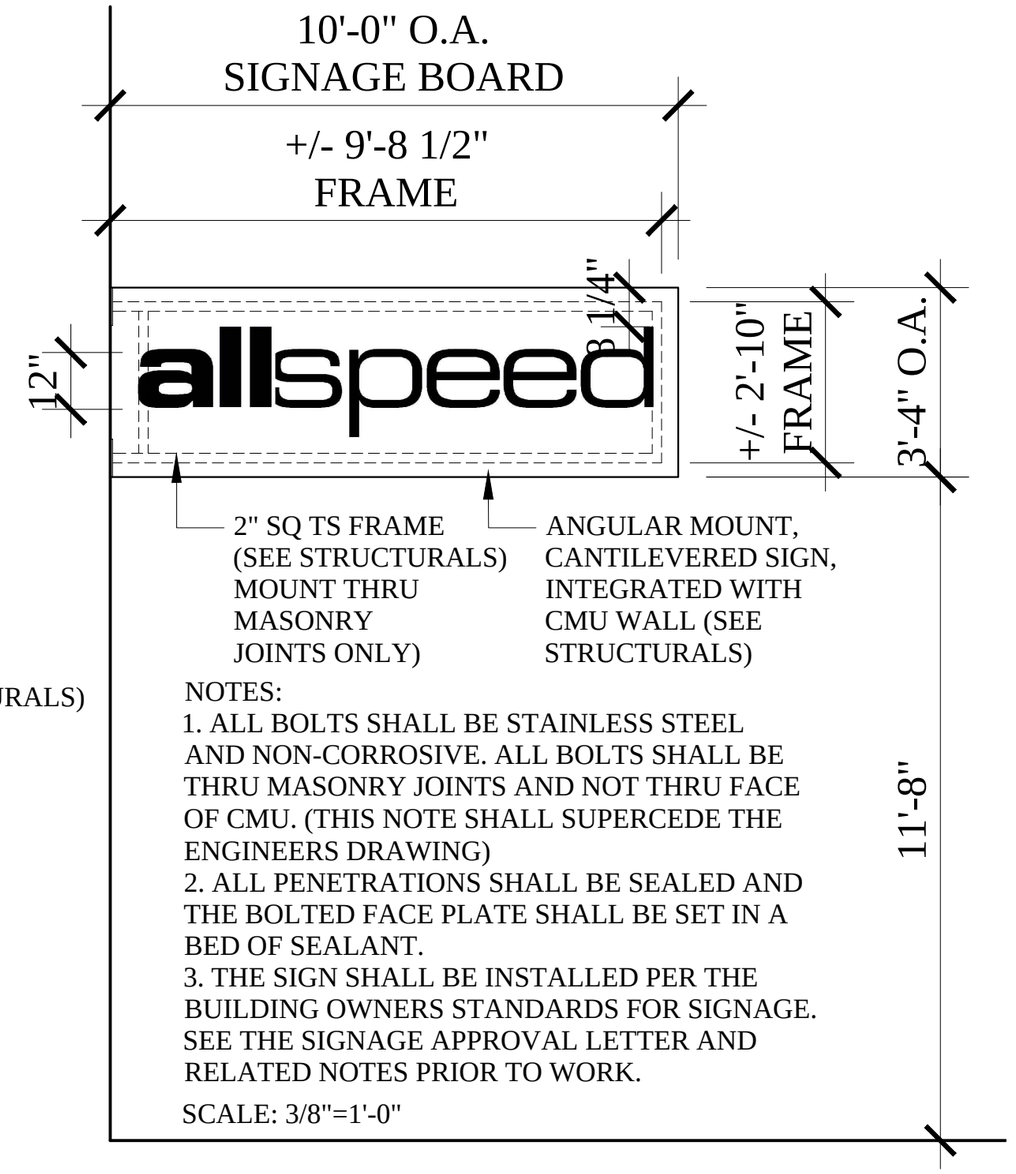

NOTES:

1. ALL BOLTS SHALL BE STAINLESS STEEL AND NON-CORROSIVE. ALL BOLTS SHALL BE THRU MASONRY JOINTS AND NOT THRU FACE OF CMU. (THIS NOTE SHALL SUPERCEDE THE ENGINEERS DRAWING)
2. ALL PENETRATIONS SHALL BE SEALED AND THE BOLTED FACE PLATE SHALL BE SET IN A BED OF SEALANT.
3. THE SIGN SHALL BE INSTALLED PER THE BUILDING OWNERS STANDARDS FOR SIGNAGE. SEE THE SIGNAGE APPROVAL LETTER AND RELATED NOTES PRIOR TO WORK.

SCALE: 3/8"=1'-0"