


DESIGN NOTES:
1. CONCRETE 5000 PSI AT 28 DAYS.


4. ALL TEES/BAFFLES PROVIDED BY PRECAST.


3. JOINTS SEALED WITH BUTYL RUBBER JOINT SEALANT (ASSHTO M-19)


THIS STRUCTURE MUST DISCHARGE TO A CITY OF PORTLAND STANDARD MANHOLE WITH


2. H-20 LOADING

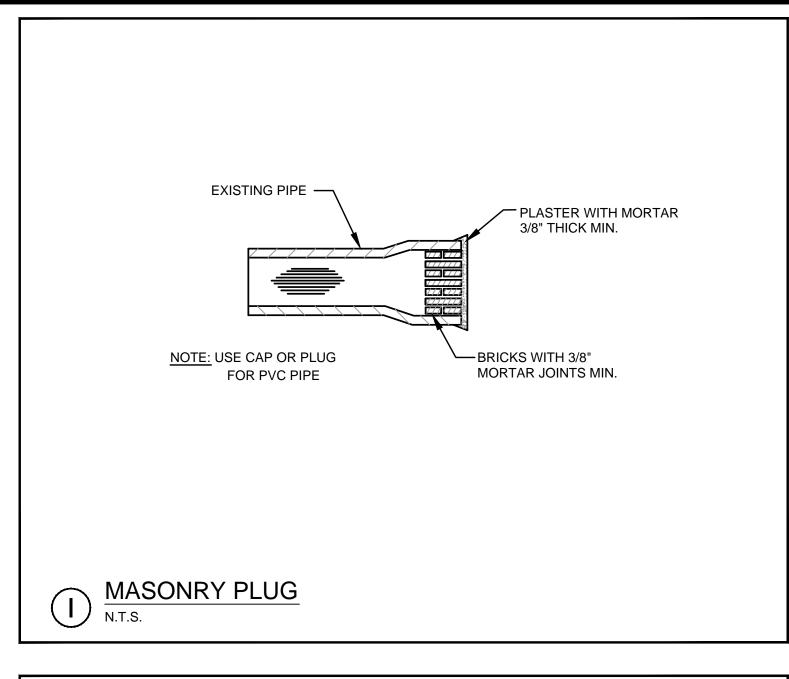


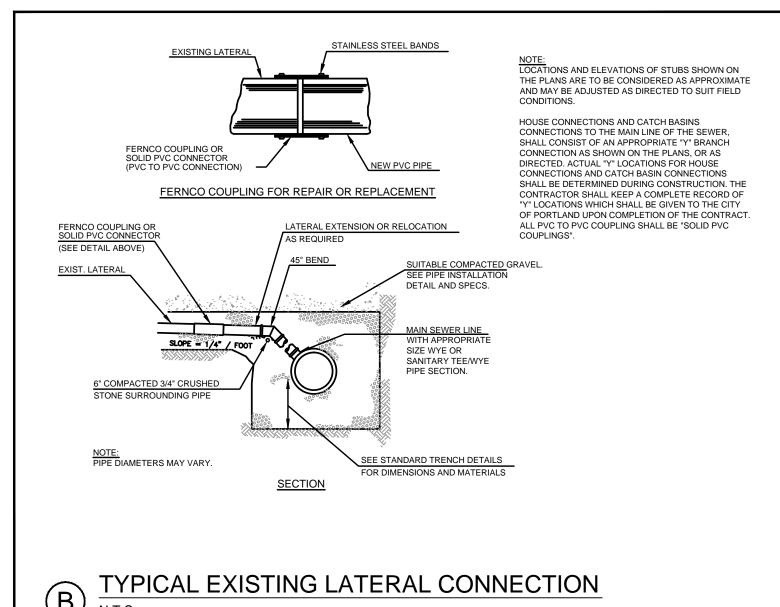


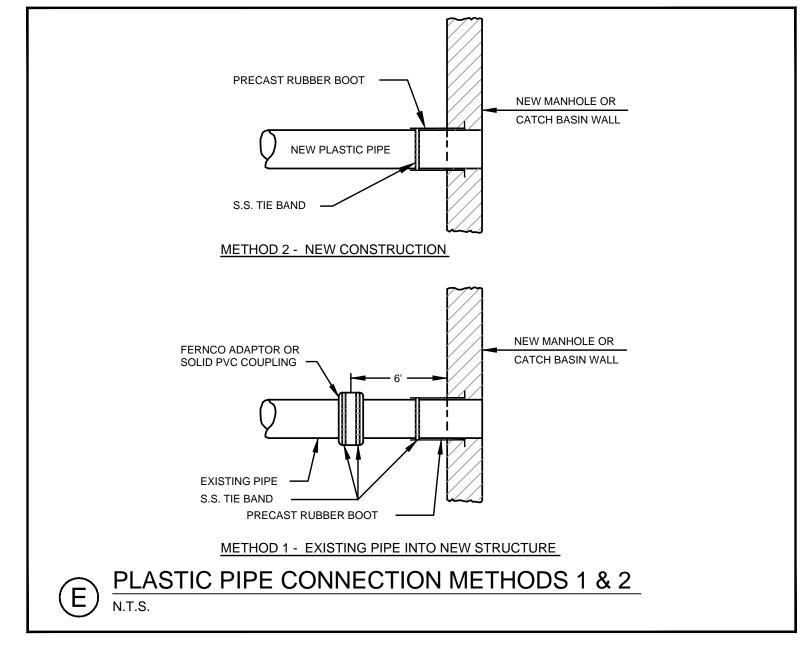


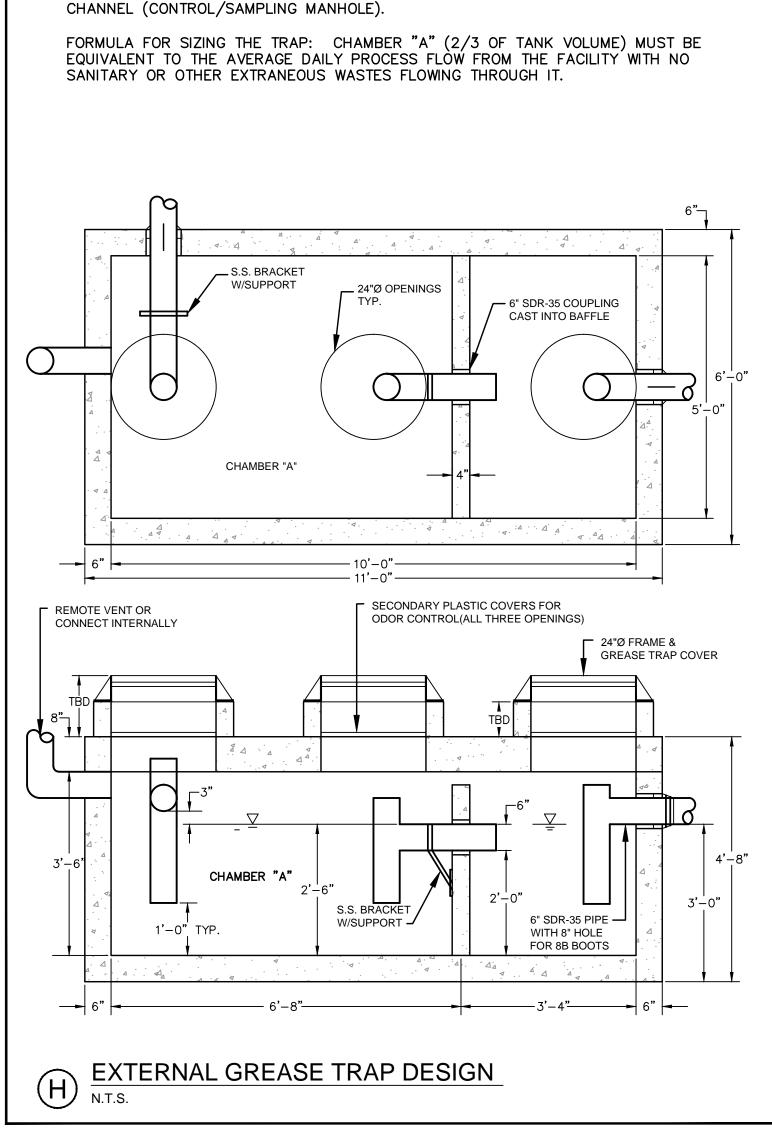

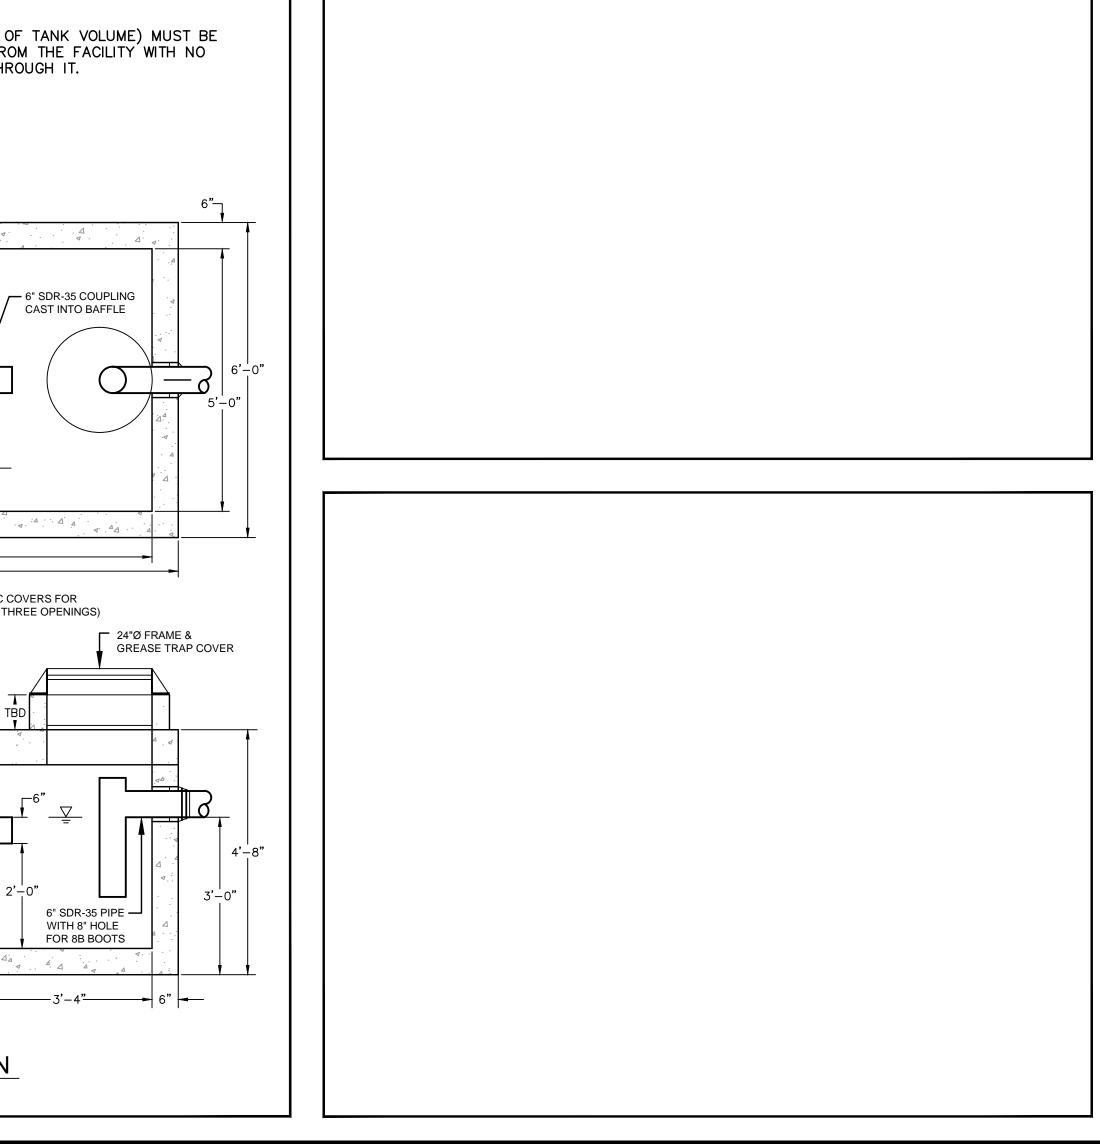

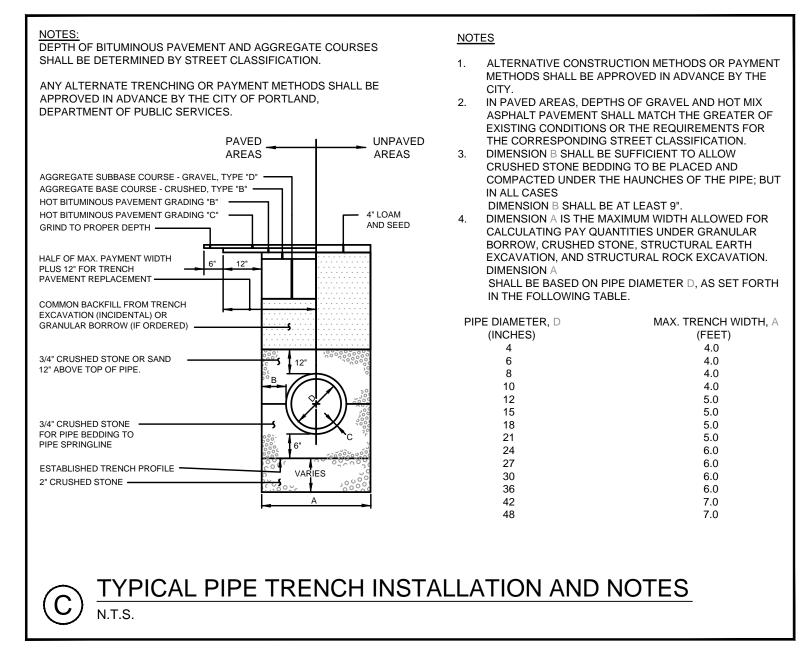

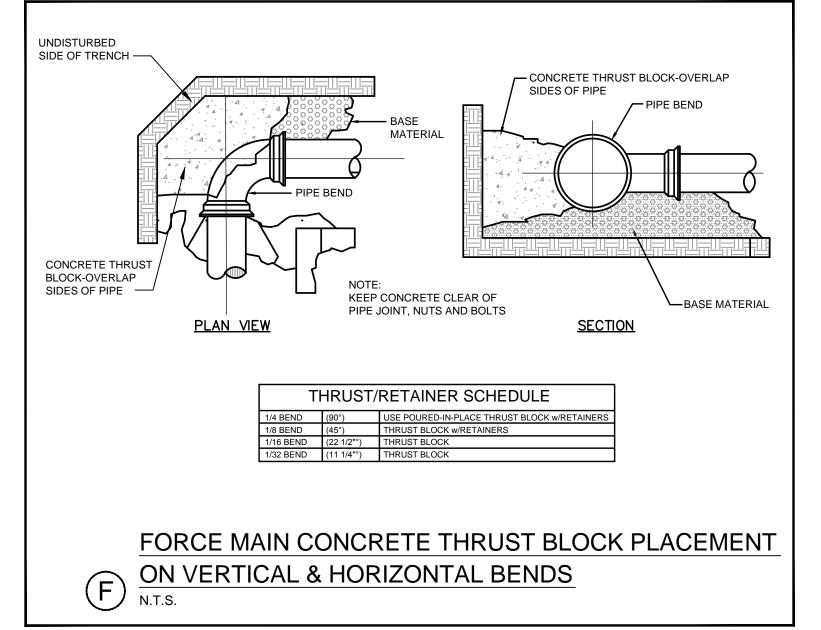

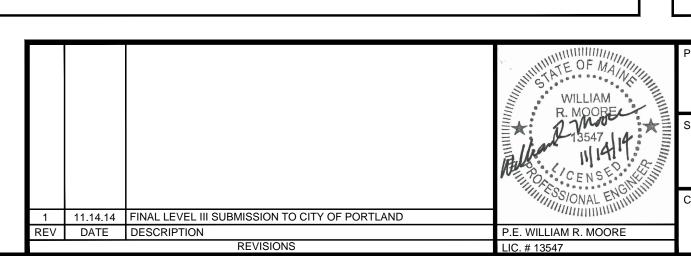

midtown PORTLAND, MAINE SAN SEWER AND STORM DRAIN DETAILS

THE FEDERATED

COMPANIES

DRAWN: KEW

SHEET

FAY, SPOFFORD & THORNDIKE ENGINEERS · PLANNERS · SCIENTISTS 778 MAIN ST, SUITE 8, SOUTH PORTLAND, ME 04106 FORMERLY DELUCA-HOFFMAN ASSOCIATES

PRELIMINARY - NOT FOR CONSTRUCTION

FILE NAME: 3062-DETAIL SHEETS

C-7.4