


ENLARGED SITE PLAN

NOTES:

1. BIT. SIDEWALK AND PEDESTRIAN ACCESS RAMPS ALONG FORE ST. AND INDIA ST. ARE TEMPORARY. BRICK SIDEWALK AND RAMPS, AS PER CITY APPROVED SITE PLAN, SHALL BE PROVIDED IN FUTURE PHASES OF WORK.
2. PEDESTRIAN ACCESS RAMPS SHALL CONFORM TO ADA STANDARDS. WORK SHALL CONFORM TO PROJECT DETAILS AND CITY OF PORTLAND TECHNICAL AND DESIGN STANDARDS AND GUIDELINES.
3. CUT EXIST. GRANITE MONUMENT AS NEC., PROVIDE COPPER ROD & CITY SURVEY WASHER MARKED TO CITY OF PORTLAND STANDARDS BY PROF. LAND SURVEYOR, RESET FRAME & COVER TO PROPOSED GRADE.
4. LOCATION OF STOP BARS AND SIGN RELOCATION SHALL BE APPROVED BY CITY IN ADVANCE OF WORK.
5. ALL CONFLICTING PAVEMENT MARKINGS SHALL BE REMOVED BY SURFACE GRINDING.
6. PARKING SIGNS SHALL BE MODIFIED AS NEEDED FOLLOWING COORDINATION WITH THE CITY.

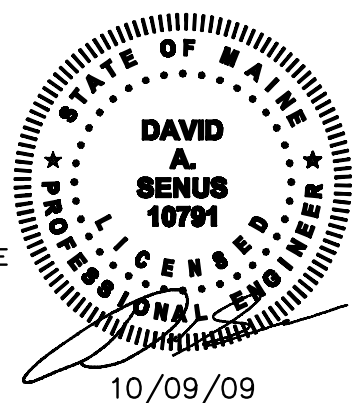

41 Hudson Drive
Portland, Maine 04102
800.428.4282 | www.woodardcurran.com
COMMITMENT & INTEGRITY DRIVE RESULTS
WOODARD & CURRAN

**SIDEWALK IMPROVEMENTS
© FORE ST. & INDIA ST.**

DESIGNED BY: DAS
CHECKED BY: DAS
DRAWN BY: BCM
203555-sk.dwg

INTERCONTINENTAL DEVELOPERS, INC.
BOSTON, MA

OCEAN GATEWAY GARAGE SIDEWALK
IMPROVEMENTS © FORE & INDIA

JOB NO: 203555
DATE: 10/09/09
SCALE: AS NOTED

FIG. 1