


- NOTES:
 1. USE ACI REQUIREMENTS FOR THE MINIMUM COVER OF REINF.
 2. PROVIDE 2-#6 TABS HORIZ MIN, UNLESS NOTED OTHERWISE.
 3. "L" SHALL BE THE LARGER OF "L1" OR "L2".

CONCRETE GRADE BEAM DETAIL

1
 3/4" = 1'-0"

MARK	WIDTH x DEPTH (X'X')	BOT. REINF. CONTINUOUS	TOP REINF. CONTINUOUS	STIRRUPS			REMARKS
				TYPE	SIZE	SPACING	
GB1	2'-4"X3'-9"	4-#9	4-#9	□	#4	18"	1 ADD'L. #9 EA. SIDE
GB2	1'-2"X4'-6"	3-#9	3-#9	□	#4	12"	6 ADD'L. #9 EA. SIDE
GB3	1'-2"X3'-11"	3-#9	3-#9	□	#4	12"	HORIZ. SIDE BARS #4@ 12" O.C. EF
GB4	1'-2"X3'-2"	3-#9	3-#9	□	#4	12"	HORIZ. SIDE BARS #4@ 12" O.C. EF

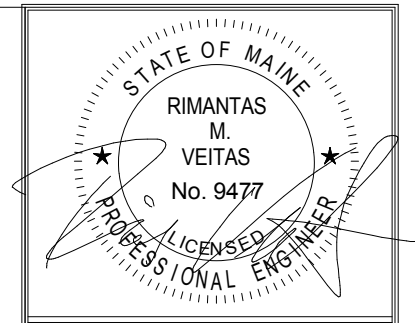

Prepared For:
 0 Hancock Street
 LLC

Consulting Engineer:
VEITAS SVEITAS
 engineers
 689 Granite Street, Suite 101
 Brunswick, Massachusetts 02916
 TEL: (508) 866-2888 FAX: (508) 866-2905

Architect:
ARCHETYPE
 architects
 48 Union Wharf Portland, Maine 04101
 (207) 772-6022 Fax (207) 772-4056

Project:
0 HANCOCK STREET
 0 HANCOCK STREET
 PORTLAND, MAINE

Revisions:
 08-11-17 Issued for Foundation Permit
 08-31-17 Permit Set
 09-15-17 Steel Bid Set
 09-22-17 Pile Bid Set
 09-29-17 Concrete Bid Set
 10-06-17 Issued for Permit

Date: 08/11/17
 Scale:
 Grade Schedule & Details

S306