



## Submittal Data Sheet

2 PORT HP, DUCTLESS OD 1.5 TON


2MXS18NMVJU

### FEATURES

- Up to 18.9 SEER / Up to 12.7 EER / Up to 12.5 HSPF
- High-efficiency inverter driven swing compressor
- Low ambient heating to 5°F / -4°F with optional drain pan heater
- Specialized drain pan design for improved cold climate drainage

### BENEFITS

- 12 Year limited parts warranty with online registration
- 5 Year limited parts warranty for commercial applications
- High efficiency cooling and heating operation provides utility bill savings
- Multiple indoor unit style options: wall mounted, floor standing, ceiling cassette, slim duct
- May qualify for regional utility rebates and incentives
- Compatible with optional Daikin ENVI Wi-Fi capable Smart Control

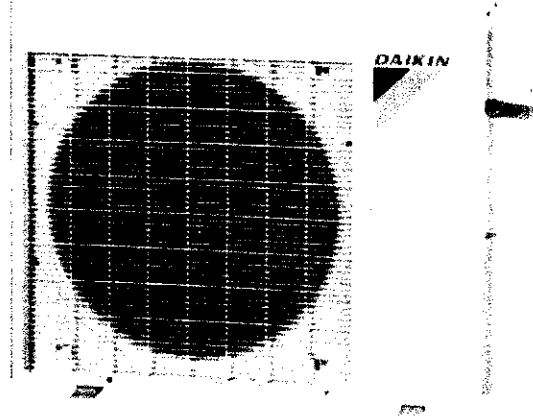



## Submittal Data Sheet

2 PORT HP, DUCTLESS OD 1.5 TON

2MXS18NMVJU

### PERFORMANCE

Outdoor Unit Model No.	2MXS18NMVJU	Outdoor Unit Name:	2 PORT HP, DUCTLESS OD 1.5 TON
Type:	Heat Pump		
Rated Cooling Conditions:	Indoor (°F DB/DB): 80 / 67 Ambient (°F DB/WB): 95 / 75	Rated Heating Conditions:	Indoor (°F DB/WB): 70 / 60 Ambient (°F DB/WB): 47 / 43
Rated Piping Length(ft):	25		
Rated Height Difference (ft):	49.00		
Rated Cooling Capacity (Btu/hr):	18,000	Rated Heating Capacity (Btu/hr):	18,900
Cooling Input Power (kW):		Heating Input Power (kW):	
EER (Non-Ducted/Ducted):	12.50 / 9.50	Heating COP (Non-Ducted/Ducted):	4.1 / 4.1
SEER (Non-Ducted/Ducted):	18.90 / 14.00	HSPF (Non-Ducted/Ducted):	10.7 / 8.2
Max/Min Cooling Capacity (Btu/hr):	21,000 /	Max/Min Heating Capacity (Btu/hr):	25,000 /

### OUTDOOR UNIT DETAILS

Power Supply (V/Hz/Ph):	208-230 / 60 / 1	Compressor Type:	Inverter
Power Supply Connections:	L1, L2, Ground	Capacity Control Range (%):	-
Min. Circuit Amps MCA (A):	15.80	Airflow Rate (H) (CFM):	2,150
Max Overcurrent Protection (MOP) (A):	20.00	Gas Pipe Connection (inch):	3/8
Max Starting Current MSC(A):	14.00	Liquid Pipe Connection (inch):	1/4
Rated Load Amps RLA(A):	14.0	Sound Pressure (H) (dBA):	50
Dimensions (HxWxD) (in):	28-15/16 x 34-1/4 x 12-5/8	Sound Power Level (dBA):	
Net Weight (lb):	123		




**Submittal Data Sheet**  
**2 PORT HP, DUCTLESS OD 1.5 TON**  
**2MXS18NMVJU**

**SYSTEM DETAILS**

Refrigerant Type:	R-410A	Cooling Operation Range (°F DB):	14 - 115
Holding Refrigerant Charge (lbs):	3.9	Heating Operation Range (°F WB):	5 - 72
Additional Charge (lb/ft):	0.01	Max. Pipe Length (Vertical) (ft):	49
Pre-charge Piping (Length) (ft):	98	Cooling Range w/Baffle (°F DB):	14 - 115
Max. Pipe Length (Total) (ft):	164	Heating Range w/Baffle (°F WB):	-4 - 72
Max Height Separation (Ind to Ind ft):	49		

**DIMENSIONAL DRAWING**

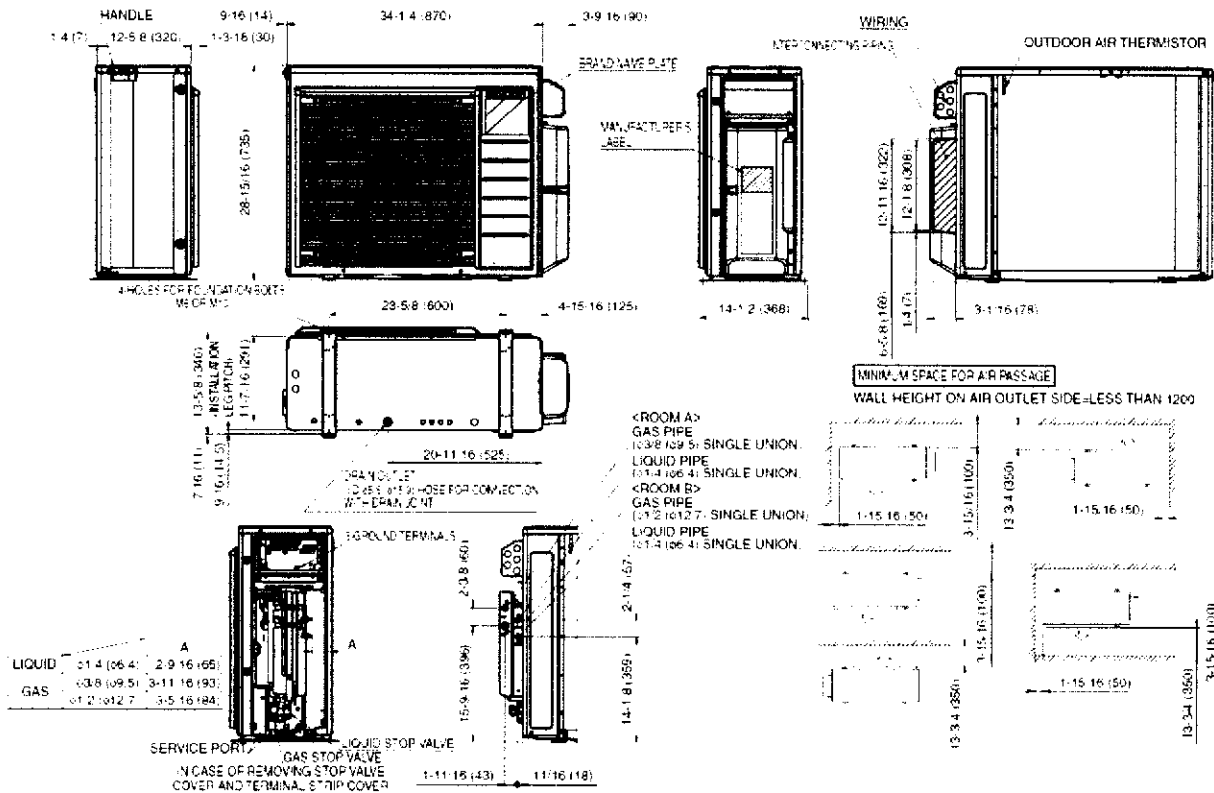

C: 3D093197



## Submittal Data Sheet


4 PORT HP, DUCTLESS OD 3 TON  
4MXS36NMVJU

### FEATURES

- Up to 18.9 SEER / Up to 12.7 EER / Up to 12.5 HSPF
- High-efficiency inverter driven swing compressor
- Low ambient heating to 5°F / -4°F with optional drain pan heater
- Specialized drain pan design for improved cold climate drainage

### BENEFITS

- 12 Year limited parts warranty with online registration
- 5 Year limited parts warranty for commercial applications
- High efficiency cooling and heating operation provides utility bill savings
- Multiple indoor unit style options: wall mounted, floor standing, ceiling cassette, slim duct
- May qualify for regional utility rebates and incentives
- Compatible with optional Daikin ENVI Wi-Fi capable Smart Control

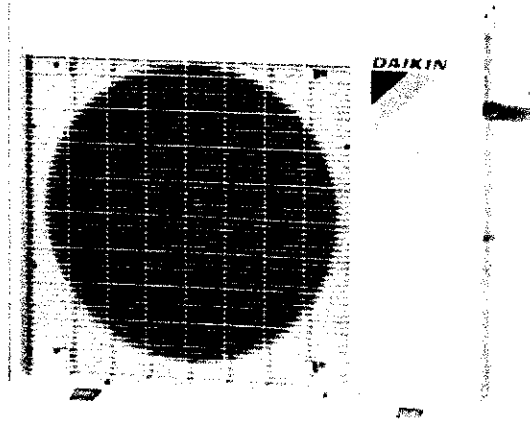



## Submittal Data Sheet

4 PORT HP, DUCTLESS OD 3 TON

4MXS36NMVJU

### PERFORMANCE

Outdoor Unit Model No.	4MXS36NMVJU	Outdoor Unit Name:	4 PORT HP, DUCTLESS OD 3 TON
Type:	Heat Pump		
Rated Cooling Conditions:	Indoor (°F DB/DB): 80 / 67 Ambient (°F DB/WB): 95 / 75	Rated Heating Conditions:	Indoor (°F DB/WB): 70 / 60 Ambient (°F DB/WB): 47 / 43
Rated Piping Length(ft):	25		
Rated Height Difference (ft):	49.00		
Rated Cooling Capacity (Btu/hr):	36,000	Rated Heating Capacity (Btu/hr):	36,000
Cooling Input Power (kW):		Heating Input Power (kW):	
EER (Non-Ducted/Ducted):	9.20 / 7.90	Heating COP (Non-Ducted/Ducted):	4.5 / 3.5
SEER (Non-Ducted/Ducted):	17.70 / 14.00	HSPF (Non-Ducted/Ducted):	12.2 / 8.2
Max/Min Cooling Capacity (Btu/hr):	38,000 /	Max/Min Heating Capacity (Btu/hr):	43,000 /

### OUTDOOR UNIT DETAILS

Power Supply (V/Hz/Ph):	208-230 / 60 / 1	Compressor Type:	Inverter
Power Supply Connections:	L1, L2, Ground	Capacity Control Range (%):	-
Min. Circuit Amps MCA (A):	19.75	Airflow Rate (H) (CFM):	2,613
Max Overcurrent Protection (MOP) (A):	20.00	Gas Pipe Connection (inch):	1/2
Max Starting Current MSC(A):	17.50	Liquid Pipe Connection (inch):	1/4
Rated Load Amps RLA(A):	17.5	Sound Pressure (H) (dBA):	54
Dimensions (HxWxD) (in):	28-15/16 x 34-1/4 x 12-5/8	Sound Power Level (dBA):	
Net Weight (lb):	139		




**Submittal Data Sheet**  
**4 PORT HP, DUCTLESS OD 3 TON**  
**4MXS36NMVJU**

**SYSTEM DETAILS**

Refrigerant Type:	R-410A	Cooling Operation Range (*F DB):	14 - 115
Holding Refrigerant Charge (lbs):	6.2	Heating Operation Range (*F WB):	5 - 72
Additional Charge (lb/ft):	0.01	Max. Pipe Length (Vertical) (ft):	49
Pre-charge Piping (Length) (ft):	132	Cooling Range w/Baffle (*F DB):	14 - 115
Max. Pipe Length (Total) (ft):	230	Heating Range w/Baffle (*F WB):	-4 - 72
Max Height Separation (Ind to Ind ft):	49		

**DIMENSIONAL DRAWING**

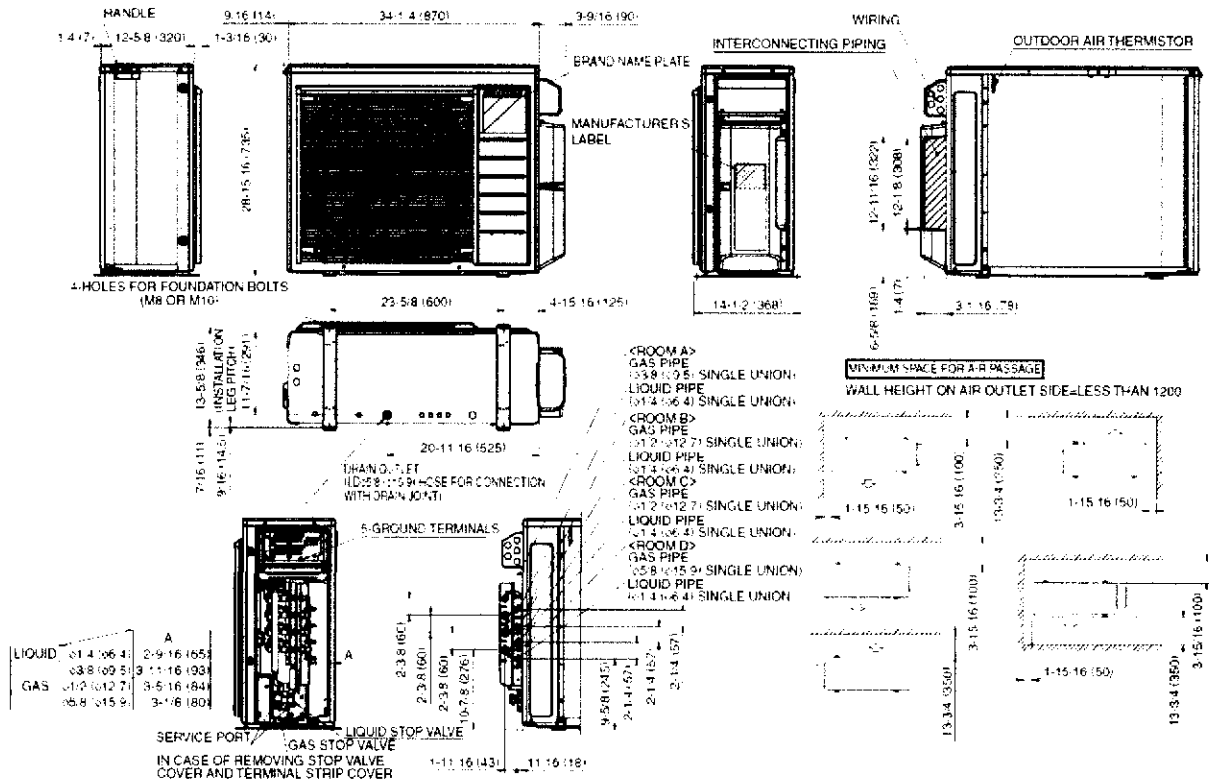

C: 3D093199



## Submittal Data Sheet

4-Ton Multi-Split Outdoor Unit


RMXS48LVJU

### FEATURES

- Connect from 2 up to 8 indoor units from a single outdoor unit
- Long piping lengths, up to 440 ft
- Use with ductless wall mount, cassette or slim duct indoor units
- 12 year limited parts and compressor warranty with online registration

### BENEFITS

- Quiet operation

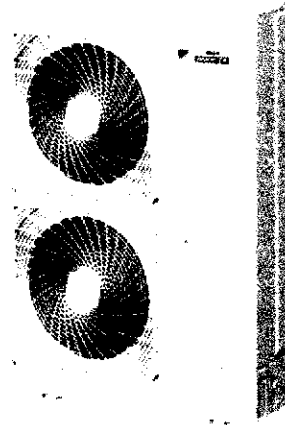



### Submittal Data Sheet

4-Ton Multi-Split Outdoor Unit

RMXS48LVJU

#### PERFORMANCE

Outdoor Unit Model No.	RMXS48LVJU	Outdoor Unit Name:	4-Ton Multi-Split Outdoor Unit
Type:	Heat Pump		
Rated Cooling Conditions:	Indoor (°F DB/DB): 80 / 67 Ambient (°F DB/WB): 95 / 75	Rated Heating Conditions:	Indoor (°F DB/WB): 70 / 70 Ambient (°F DB/WB): 47 / 43
Rated Piping Length(ft):	25		
Rated Height Difference (ft):	98.00		
Rated Cooling Capacity (Btu/hr):	48,000	Rated Heating Capacity (Btu/hr):	54,000
Cooling Input Power (kW):	4.73	Heating Input Power (kW):	4.26
		Heating COP (Non-Ducted/Ducted):	/
		HSPF (Non-Ducted/Ducted):	/
Max/Min Cooling Capacity (Btu/hr):	48,000 / 14,000	Max/Min Heating Capacity (Btu/hr):	61,000 / 14,000

#### OUTDOOR UNIT DETAILS

Power Supply (V/Hz/Ph):	208-230 / 60 / 1	Compressor Type:	Inverter
Power Supply Connections:	L1, L2, Ground	Capacity Control Range (%):	29 - 100
Min. Circuit Amps MCA (A):	27.00	Airflow Rate (H) (CFM):	3,740
Max Overcurrent Protection (MOP) (A):	30.00	Gas Pipe Connection (inch):	3/4
Max Starting Current MSC(A):		Liquid Pipe Connection (inch):	3/8
Rated Load Amps RLA(A):	23.3	Sound Pressure (H) (dBA):	58
Dimensions (HxWxD) (in):	52-15/16 x 35-7/16 x 12-5/8	Sound Power Level (dBA):	57
Net Weight (lb):	283		





**Submittal Data Sheet**  
 4-Ton Multi-Split Outdoor Unit  
 RMXS48LVJU

**SYSTEM DETAILS**

Refrigerant Type:	R-410A	Cooling Operation Range (*F DB):	23 - 115
Holding Refrigerant Charge (lbs):	8.8	Heating Operation Range (*F WB):	5 - 75
Additional Charge (lb/ft):		Max. Pipe Length (Vertical) (ft):	98
Pre-charge Piping (Length) (ft):	0	Cooling Range w/Baffle (*F DB):	-
Max. Pipe Length (Total) (ft):	442	Heating Range w/Baffle (*F WB):	-
Max Height Separation (Ind to Ind ft):	98		

**DIMENSIONAL DRAWING**

