WINDOW SCHEDULE

UNIT	SIZE: WIDTH X HEIGHT MASONRY OPENING	CONTRACTOR VERIFIED SIZE, INTERIOR PAINT OR STAIN?	TYPE	COMMENTS	ALTERNATE
EAST					
1E01	6'-6" X 10'-6"		A	ROUND TOP - INTERIOR STORM WINDOW	1
1E02	6'-6" X 3'-3"		D	HALF ROUND TRANSOM ONLY W/ INT STORM	1
1E03	6'-6" X 10'-6"		A	ROUND TOP - INTERIOR STORM WINDOW	1
2E01	6'-6" X 9'-0"		B	WINDOW AND TRANSOM	2
2E02	6'-6" X 9'-0"		B	WINDOW AND TRANSOM	2
2E03	6'-6" X 9'-0"		B	WINDOW AND TRANSOM	2
3E01	6'-6" X 7'-0"		C	WINDOW	2
3E02	6'-6" X 7'-0"		C	WINDOW	2
3E03	6'-6" X 7'-0"		C	WINDOW	2
WEST					
1W01	6'-6" X 10'-6"		A	ROUND TOP - INTERIOR STORM WINDOW	1
1W02	6'-6" X 3'-3"		D	HALF ROUND TRANSOM ONLY W/ INT STORM	1
1W03	6'-6" X 10'-6"		A	ROUND TOP - INTERIOR STORM WINDOW	1
2W01	6'-6" X 9'-0"		B	WINDOW AND TRANSOM	2
2W02	6'-6" X 9'-0"		B	WINDOW AND TRANSOM	2
2W03	6'-6" X 9'-0"		B	WINDOW AND TRANSOM	2
3W01	6'-6" X 7'-0"		C	WINDOW	2
3W02	6'-6" X 7'-0"		C	WINDOW	2
3W03	6'-6" X 7'-0"		C	WINDOW	2
NORTH					
1N01	6'-6" X 10'-6"		A	ROUND TOP - INTERIOR STORM WINDOW	1
1N02	6'-6" X 10'-6"		A	ROUND TOP - INTERIOR STORM WINDOW	1
1N03	6'-6" X 10'-6"		A	ROUND TOP - INTERIOR STORM WINDOW	1
1N04	6'-6" X 3'-3"		D	HALF ROUND TRANSOM ONLY W/ INT STORM	1
1N05	6'-6" X 10'-6"		A	ROUND TOP - INTERIOR STORM WINDOW	1
1N06	6'-6" X 10'-6"		A	ROUND TOP - INTERIOR STORM WINDOW	1
1N07	6'-6" X 10'-6"		A	ROUND TOP - INTERIOR STORM WINDOW	1
2N01	6'-6" X 9'-0"		B	WINDOW AND TRANSOM	2
2N02	6'-6" X 9'-0"		B	WINDOW AND TRANSOM	2
2N03	6'-6" X 9'-0"		B	WINDOW AND TRANSOM	2
2N04	6'-6" X 9'-0"		E	WINDOW AND TRANSOM - EGRESS DOOR	2
2N05	6'-6" X 9'-0"		B	WINDOW AND TRANSOM	2
2N06	6'-6" X 9'-0"		B	WINDOW AND TRANSOM	2
2N07	6'-6" X 9'-0"		B	WINDOW AND TRANSOM	2
3N01	6'-6" X 7'-0"		C	WINDOW	2
3N02	6'-6" X 7'-0"		C	WINDOW	2
3N03	6'-6" X 7'-0"		C	WINDOW	2
3N04	6'-6" X 7'-0"		C	WINDOW	2
3N05	6'-6" X 7'-0"		F	WINDOW - EGRESS DOOR	2
3N06	6'-6" X 7'-0"		C	WINDOW	2
3N07	6'-6" X 7'-0"		C	WINDOW	2
SOUTH					
1S01	6'-6" X 10'-6"		A	ROUND TOP - INTERIOR STORM WINDOW	1
1S02	6'-6" X 10'-6"		A	ROUND TOP - INTERIOR STORM WINDOW	1
1S03	6'-6" X 10'-6"		A	ROUND TOP - INTERIOR STORM WINDOW	1
1S04	6'-6" X 3'-3"		D	HALF ROUND TRANSOM ONLY W/ INT STORM	1
1S05	6'-6" X 10'-6"		A	ROUND TOP - INTERIOR STORM WINDOW	1
1S06	6'-6" X 10'-6"		A	ROUND TOP - INTERIOR STORM WINDOW	1
1S07	6'-6" X 10'-6"		A	ROUND TOP - INTERIOR STORM WINDOW	1
2S01	6'-6" X 9'-0"		B	WINDOW AND TRANSOM	2
2S02	6'-6" X 9'-0"		B	WINDOW AND TRANSOM	2
2S03	6'-6" X 9'-0"		B	WINDOW AND TRANSOM	2
2S04	6'-6" X 9'-0"		B	WINDOW AND TRANSOM	2
2S05	6'-6" X 9'-0"		B	WINDOW AND TRANSOM	2
2S06	6'-6" X 9'-0"		B	WINDOW AND TRANSOM	2
2S07	6'-6" X 9'-0"		B	WINDOW AND TRANSOM	2
3S01	6'-6" X 7'-0"		C	WINDOW	2
3S02	6'-6" X 7'-0"		C	WINDOW	2
3S03	6'-6" X 7'-0"		C	WINDOW	2
3S04	6'-6" X 7'-0"		C	WINDOW	2
3S05	6'-6" X 7'-0"		C	WINDOW	2
3S06	6'-6" X 7'-0"		C	WINDOW	2
3S07	6'-6" X 7'-0"		C	WINDOW	2

DOOR SCHEDULE

UNIT	SIZE: WIDTH X HEIGHT	CONTRACTOR VERIFIED SIZE	TYPE	COMMENTS	ALTERNATE
		INTERIOR PAINT OR STAIN?			

MATERIAL SELECTION

WINDOWS	GREEN MOUNTAIN	EXTERIOR COLOR INTERIOR COLOR	FACTORY APPLIED COLOR: TBD FACTORY APPLIED COLOR: TBD
BREAK METAL	22 GA. KYNAR 500 FINISH	MATCH WINDOW COLOR	
SEALANT	DYMERIC 240 SINGLE PART POLYURETHANE SEALANT BY TREMCO	COLOR	TO BE DETERMINED
MEMBRANE FLASHING	GRACE ULTRA (BUTYL BASED NOT ASPHALT BASED PRODUCT)		

REQUIRED MOCKUPS FOR THE WINDOW PROJECT:

1. WINDOW PROTOTYPE AND MOCKUPS AS INDICATED.
2. WINDOW SILL PAN AND MEMBRANE APPLICATION TYPICAL WINDOW.
3. SEALANT APPLICATION - PROVIDE A MANUFACTURERS REP ONSITE PULL TEST PRIOR TO APPLICATION OF SEALANTS.

BASE BID AND ALTERNATES:

THE INTENSION OF THIS BASE BID IT TO INSTALL NEW GREEN MOUNTAIN MILESTONE SERIES WITH CUSTOM SASH AND FRAME DETAILS TO MATCH DRAWINGS. THE FIRST FLOOR WINDOWS WILL HAVE RESTORED HALF ROUND TRANSOMS REINSTALLED WITH A SINGLE PANE INTERIOR FIXED STORM WINDOW, SECOND AND THIRD FLOOR WINDOWS WILL BE COMPLETE REPLACEMENTS.

GLASS WILL BE 1/2" LOW E ii GLASS WITH ARGON GAS.

WINDOWS WILL BE FACTORY PRIMED AND PAINTED BOTH INTERIOR AND EXTERIOR.

ALTERNATE #1: CONTRACTOR TO PRICE REPLACEMENT OF ROUND TOP WINDOWS TRANSOMS IN LIEU OF RESTORING EXISTING. THE NEW WINDOW UNITS WILL BE A COMPLETE REPLACEMENT AND HAVE 1" GLASS.

ALTERNATE#2: CONTRACTOR TO PROVIDE A PRICE TO REPLACE WOOD LINTELS AT SECOND AND THIRD FLOOR WINDOW HEADS WITH A PROPER LENGTH W8X31 AS SHOWN IN THE DRAWINGS. TWO PRICES SHOULD BE INCLUDED; THE FIRST PRICE WILL REFLECT A REPLACEMENT OF LINTELS ON AN INDIVIDUAL AS NEEDED BASIS AND THE SECOND PRICE WILL BE TO REPLACE ALL OF THEM IN KIND.

WINDOW TAG IDENTIFIER



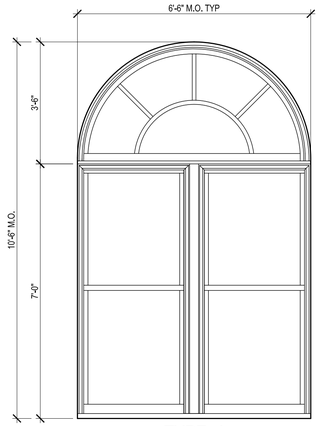

TYPE: A

NEW DOUBLE HUNG MULLED WOOD WINDOW BUILT AS A SINGLE UNIT WITH COMMON SILL AND 1" INSULATED GLASS - RESTORE HALF ROUND TRANSOM - ADD FIXED STORM WINDOW AT TRANSOM INTERIOR

ALTERNATE #1: MAKE NEW AND INSTALL MATCHING HALF ROUND MATCHING TRANSOM WITH 1" GLASS AS PART OF WINDOW UNIT - INTERIOR STORM WINDOW IS ELIMINATED

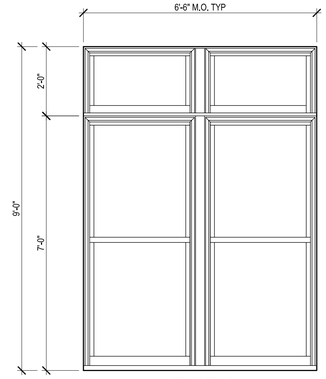

TYPE: B

NEW DOUBLE HUNG MULLED WOOD WINDOW AND NEW TRANSOM BUILT AS A SINGLE UNIT WITH COMMON SILL AND 1" INSULATED GLASS



TYPE: C

NEW DOUBLE HUNG MULLED WOOD WINDOW BUILT AS A SINGLE UNIT WITH COMMON SILL AND 1" INSULATED GLASS



TYPE: D

RESTORE HALF ROUND TRANSOM - ADD FIXED STORM WINDOW AT TRANSOM INTERIOR

ALTERNATE #1: MAKE NEW AND INSTALL MATCHING HALF ROUND MATCHING TRANSOM WITH 1" GLASS - INTERIOR STORM WINDOW IS ELIMINATED

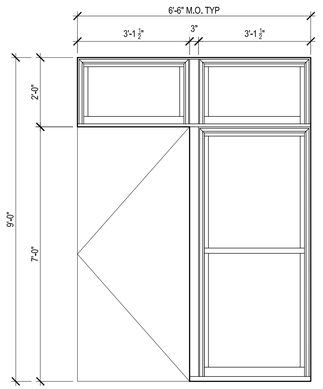

TYPE: E

NEW DOUBLE HUNG WOOD WINDOW AND NEW MULLED TRANSOM BUILT AS A SINGLE UNIT WITH COMMON SILL AND 1" INSULATED GLASS
THIS UNIT TO HAVE A WIDE LEFT HAND JAMB TO MATCH MULLED UNITS AND RECEIVE NEW EGRESS DOOR FRAME



TYPE: F

NEW DOUBLE HUNG WOOD WINDOW AND NEW MULLED TRANSOM BUILT AS A SINGLE UNIT WITH COMMON SILL AND 1" INSULATED GLASS
THIS UNIT TO HAVE A WIDE LEFT HAND JAMB TO MATCH MULLED UNITS AND RECEIVE NEW EGRESS DOOR FRAME

LICENSED ARCHITECT
DAVID P. DOUGLASS
NO. 3000
STATE OF MAINE

Prepared For:
GORHAM SAVINGS BANK
10 WENTWORTH DRIVE
GORHAM , ME 04038

Consultant:
Building Envelope Specialists
70 TOY LANE SUITE 1 KENNEBUNK, MAINE 04043
PHONE: 207.460.0085

Architect:
ARCHETYPE architects
48 Union Wharf Portland, Maine 04101
(207) 772-6022 ARCHETYPE@ARCHETYPEPA.COM

Project:
GRAND TRUNK BUILDING
1 INDIA STREET PORTLAND, ME

Revisions:

Scale: As indicated

Date: MAR 10 2016

WINDOW SCHEDULE AND ELEVATIONS

BE6

2 WINDOW SCHEDULE
-
SCALE: NTS

1 WINDOW TYPES
-