

NOTE: REFER TO ID SERIES DRAWINGS FOR EXTENT AND DETAIL OF PUBLIC AREA INTERIOR FINISHES & MILLWORK

EXTENT OF EXTERIOR STUD WALL ASSEMBLY TO BE 1 HR RATED PER LS1.02 SHOWN WITH DASHED LINE. (30 FT TO INTERIOR LOT LINE). ASSEMBLY IS SIMILAR TO 1A, WITH STUD, INSULATION & SHEATHING ASSEMBLY INSTALLED PER REQUIREMENTS FOR UL DESIGN U419

2 HR WALL ASSEMBLY TO MAINTAIN CONTINUITY AROUND BRACE FRAME CHEVRONS ABOVE UP TO FLOOR DECK ABOVE

INSTALL GWB BOTH SIDES OF STAIRWAY FRAMING PRIOR TO FRAMING WALLS BEYOND, TYP ALL LEVELS


GWB ON MEETING SIDE ONLY

PLAN NORTH

KEY PLAN

1 FIRST FLOOR PLAN

1/8" = 1'-0"

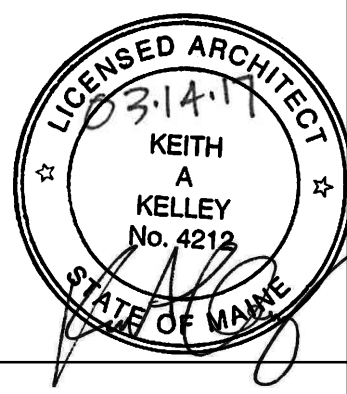

AC HOTELS by MARRIOTT

Fore Street / Hancock Street / Thames Street
Portland, Maine

REVISION:
11-15-16 INTERIOR FINISHES REMOVED
03-10-17 LOT LINE ASSEMBLY NOTE

ISSUED:
10-18-16 60% MARRIOTT REVIEW
03-14-17 BUILDING PERMIT

project architect: KAK
drawn by: DLS

ENLARGED FLOOR PLAN

sheet number:
A2.03