



- FIRST FLOOR LIGHTING PLAN NOTES:
1. CIRCUIT MOTION DETECTORS TO PANEL HP1 *7.
 2. TYPE Z LIGHT TO BE MOUNTED ABOVE AND BELOW MAIL BOXES. COORDINATE MOUNTING AND INSTALLATION WITH ARCHITECT AND INTERIOR DESIGNER.
 3. TYP W1 AND W2 LIGHTS WILL BE PROVIDED AT A LATER DATE. CONTRACTOR TO PROVIDE A \$500 ALLOWANCE FOR EACH FIXTURE, INSTALLED. PROVIDE EMPTY JUNCTION BOXES AND EMPTY CONDUIT AT LOCATIONS SHOWN ON PLAN. FUTURE BUILDING MOUNTED FIXTURES ARE INTENDED TO BE CONTROLLED BY THE LIGHTING CONTROL PANEL AS DESCRIBED ON SHEET E3.02.
 4. TYPE G LIGHTING FIXTURES ARE TO BE CONTROLLED BY THE LIGHTING CONTROL PANEL AS DESCRIBED ON SHEET E3.02.
 5. FOR FIXTURES NOT WITHIN UNITS THAT REQUIRE REMOTE BALLASTS, BALLASTS SHOULD BE MOUNTED ABOVE CEILINGS WHERE POSSIBLE, WHERE NOT POSSIBLE THEY SHOULD BE MOUNTED IN THE NEAREST UTILITY ROOM.
 6. TYPE LBI BOLLARD LIGHTS, SEE E3.0 FOR SPECIFICATIONS. SEE SHEETS L1.0 AND L2.0 FOR DETAILS.
 7. LIGHTED BENCHES PROVIDED BY OTHERS. SEE SHEETS L1.0 AND L2.1 FOR DETAILS. CIRCUIT TO PANEL HP1 *1, TO BE CONTROLLED BY LIGHTING CONTROL PANEL. PROVIDE 2 *12, 1 *12 GND IN A 3/4" CDT. STUB UP CONDUIT AT BENCH LEG FOR CONNECTION BY OTHERS. COORDINATED EXACT LOCATION.
 8. NEW CITY OF PORTLAND STREET LIGHTING POLE LP1, SEE E3.0 FOR SPECIFICATIONS. SEE SHEETS L1.0 AND L2.0 FOR DETAILS. CONNECT TO EXISTING STREET LIGHTING CIRCUIT WITH 2 *10, 1 *12 GND IN A 1" CDT.

FIRST FLOOR LIGHTING PLAN
SCALE: 1/8" = 1'-0"

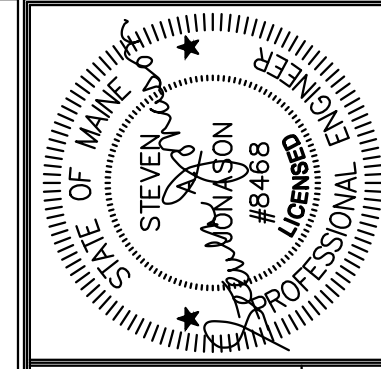

Prepared For:
**EssexNorth
Portland LLC**
P.O. Box 394
Topsfield, MA 01983

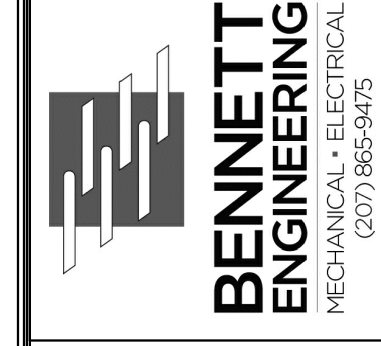

Consultant:

Architect:
**ARCHETYPE
architects**
48 Union Wharf Portland, Maine 04101
(207) 772-6022 Fax (207) 772-4056

Project:
**THAMES STREET
BUILDING**
20 Thames Street, Portland Maine

Revisions:
3 AUG 2017 - ADDENDUM 1
15 AUG 2017 - ADDENDUM 2
11 OCT 2017 - ADDENDUM 3

Date:
3 AUG 2017

Scale:
FIRST FLOOR
LIGHTING PLAN

E1.01