


- NOTES:**
1. ALL CONDUIT ON ROOF SHALL BE GALVANIZED RIGID STEEL. THE LAST 18"-30" OF THE CONDUIT RUN TO EACH MOTOR SHALL BE LIQUID TIGHT FLEXIBLE METALLIC CONDUIT.
  2. E.C. SHALL UTILIZE ROOF CURBS FOR ALL ROOF PENETRATIONS. ROOF IS NEW.
  3. DUCT MOUNTED SMOKE DETECTORS SHALL BE PROVIDED BY E.C., INSTALLED BY M.C., WIRED BY E.C. ALL DUCT MOUNTED SMOKE DETECTORS SHALL HAVE REMOTE TEST STATION AND LED ON THE FLOOR BELOW, GROUP BY AREA AND INSTALL IN A CORRIDOR OR OTHER COMMON AREA. ALL TEST STATIONS SHALL BE PERMANENTLY LABELED WITH UNIT SERVED. "RTU-1 DUCT MOUNTED SMOKE DETECTOR". LABEL SHALL BE RED PLASTIC WITH 1/8" TALL (WHITE) LETTERS.

**1** ELECTRICAL - Roof Fire Alarm Plan  
SCALE: 1/8"= 1'-0"

**BLW**  
BLW Engineers, Inc.  
311 Great Road, Fort Collins, CO 80501  
T: 978.486.4301 F: 978.428.0067  
www.blwengines.com  
ELECTRICAL • PLUMBING • FIRE PROTECTION

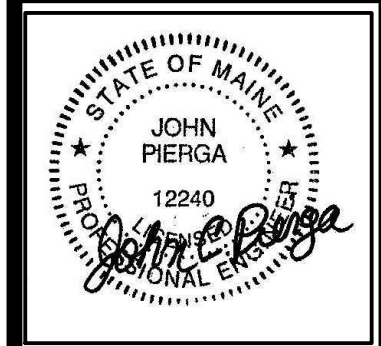

**AC HOTELS by MARRIOTT**  
Fore Street / Hancock Street / Thames Street  
Portland, Maine

REVISION:

ISSUED:  
ISSUE FOR PERMIT - 7-28-17  
ISSUE FOR CONSTRUCTION- 8-30-17

project architect: JCP  
drawn by: CMF

**ELECTRICAL  
ROOF  
FA PLAN**

sheet number:  
**E3.07**