


NOTE: SEE ELEVATION G1-M1/AE202 FOR TYPICAL COMPOSITE METAL PANEL AND STONE DIMENSIONS

G1 NORTHWEST ELEVATION
1/8" = 1'-0"

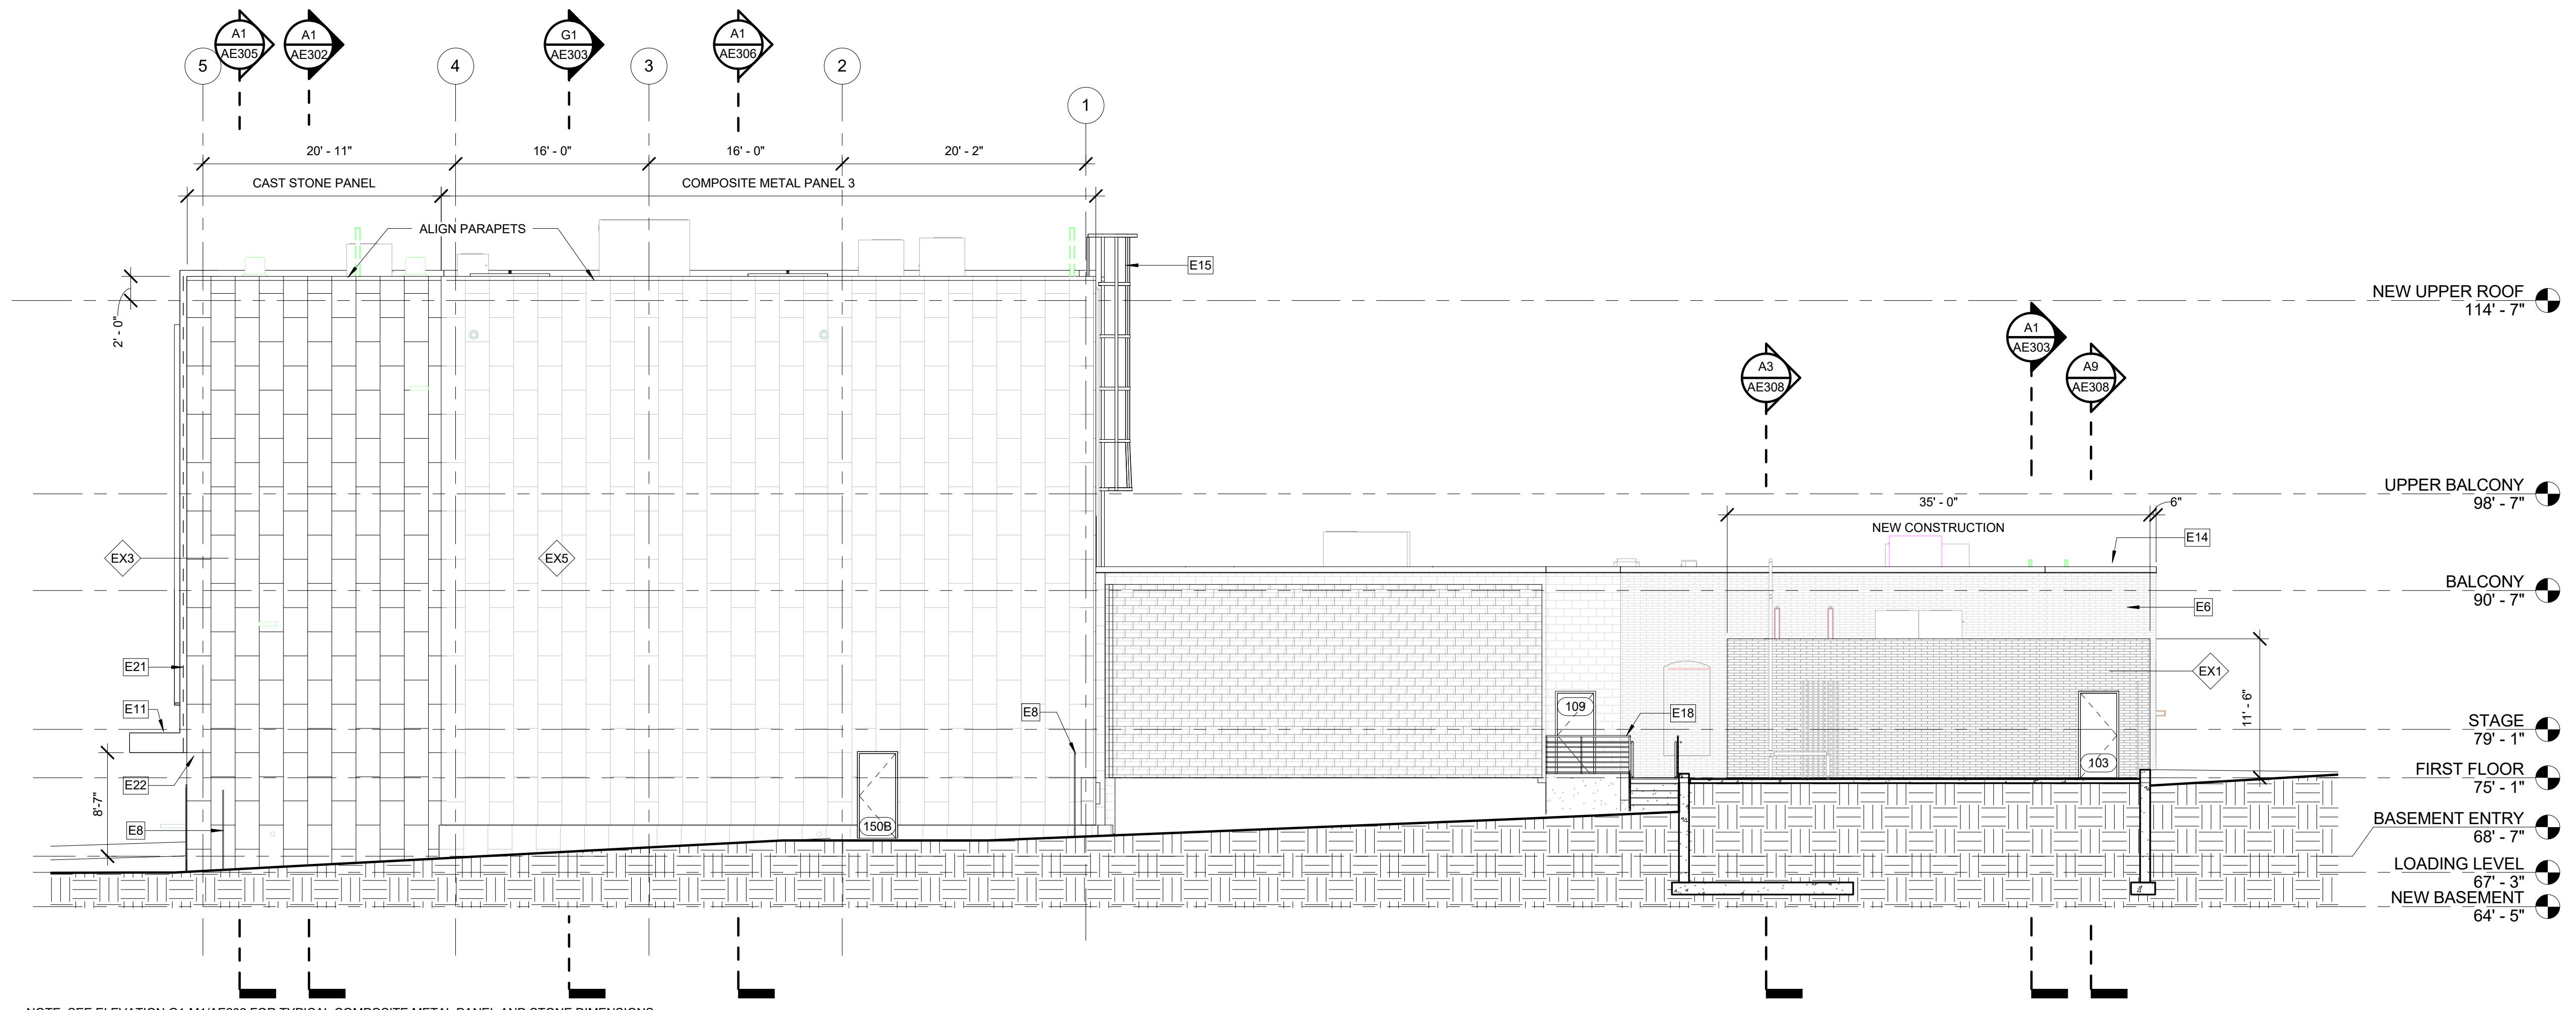

NOTE: SEE ELEVATION G1-M1/AE202 FOR TYPICAL COMPOSITE METAL PANEL AND STONE DIMENSIONS

A1 NORTHEAST ELEVATION
1/8" = 1'-0"

GLAZING LEGEND:

- GL-1: 1" THICK IGU IN STOREFRONT SYSTEM ST1
- GL-2: 1 3/4" THICK IGU IN CURTAINWALL SYSTEM CW1
- GL-3: 1 3/4" THICK SPANDREL PANEL CURTAINWALL SYSTEM CW1
- GL-4: FROSTED INTERIOR SINGLE PANE GLASS
- GL-5: CLEAR INTERIOR SINGLE PANE GLASS


KEYNOTES:

E2	INFILL EXISTING DOOR LOCATION WITH NORMAN BRICK ON CMU TO MATCH EXISTING. SET BRICK BACK FROM FACADE TO MATCH ADJACENT NICHES
E4	CLEAN, RE-POINT AND PAINT EXISTING BRICK WALL. ENTIRE WALL TO BE USED AS MURAL WALL. MURAL BY OWNER
E6	CLEAN AND RE-POINT EXISTING BRICK WALL AS REQUIRED
E8	PROVIDE EMERGENCY EGRESS AT NEW ALLY FENCE. SEE CIVIL
E9	REPLACE EXISTING CORNER GUARD
E10	DOOR JAMB TO ALIGN WITH METAL PANEL SEAMS
E11	NEW METAL CANOPY
E12	INTERNALLY LIT BUILDING SIGNAGE. GC TO COORDINATE POWER REQUIREMENTS AND DESIGN WITH EXTERIOR SIGNAGE CONSULTANT
E14	NEW METAL COPING, ENTIRE ROOF
E15	ROOF ACCESS LADDER AND CAGE
E16	ROOF SCUPPERS
E17	WINDOW HEAD AND JAMB TO ALIGN WITH METAL PANEL SEAMS, TYP
E18	EXTERIOR GUARD RAIL, SITE PAD, EGRESS STAIR AND FENCE. SEE CIVIL
E19	REMOVABLE 1/4" THICK PLEXIGLASS PANELS MOUNTED TO EXISTING BRICK WALL ON STAINLESS STEEL STANDOFF SCREWS IN EACH CORNER AND AS REQUIRED
E21	RECESSED LED LIGHT IN VERTICAL EDGE OF METAL PANEL
E22	FULL ANCHORED STONE PANEL TO ALIGN WITH BOTTOM OF CANOPY
E26	PANEL LAYOUT POINT FOR COURSING IS TOP OF PARAPET

GENERAL NOTES:

1. ALL WALL PARTITION TYPES ARE M4 UNLESS NOTED OTHERWISE. SEE SHEET AE603 & AE604 FOR PARTITION TYPES.
2. REFER TO G1002 SHEET FOR ALL ABBREVIATIONS AND SYMBOLS.
3. REFER TO ALL DRAWINGS INCLUDING ARCHITECTURAL, CIVIL, STRUCTURAL, MECHANICAL, PLUMBING, AND ELECTRICAL DRAWINGS FOR ADDITIONAL GENERAL NOTES, ABBREVIATIONS, AND SYMBOLS.
4. VERIFY ALL EQUIPMENT OPENINGS & RECOMMENDATIONS. LOCATION AND SIZES SHOWN ARE FOR INTENT PURPOSES ONLY. ADJUST ROUGH OPENINGS AND LOCATIONS AS REQUIRED PER ACTUAL EQUIPMENT.
5. G.C. TO PROVIDE & INSTALL ALL IN-WALL OR IN-CEILING BLOCKING & BRACING AS REQUIRED FOR ALL MILLWORK ITEMS, EQUIPMENT, SHELVING, AND ACCESSORIES WHETHER ITEMS ARE BY G.C. OR OTHERS COORDINATE WITH OWNER.
6. G.C. SHALL BE RESPONSIBLE FOR LAYING OUT THE SPACE PRIOR TO COMMENCING WORK AND SHALL NOTIFY THE ARCHITECT AND OWNER OF ANY DISCREPANCIES.
7. ALL CONCRETE MASONRY UNITS AND MORTAR TO INCLUDE AN INTEGRAL WATER REPELLENT.
8. ALL EXTERIOR DIMENSIONS ARE TO FACE STUD AND / OR FACE OF FOUNDATION AND MASONRY UNLESS SPECIFICALLY NOTED OTHERWISE.
9. ALL INTERIOR DIMENSIONS SHOWN ARE TO FACE OF FRAMING UNLESS SPECIFICALLY NOTED OTHERWISE.
10. REFER TO SHEET G1003-005 FOR CODE COMPLIANCE PLAN, CODE REFERENCE INFORMATION AND FIRE RATED PARTITIONS AND SPACES. ALL MECHANICAL, ELECTRICAL, SPRINKLER AND PLUMBING PENETRATIONS THROUGH FIRE RATED CONSTRUCTION SHALL BE SLEEVED, FIRE SAFED AND / OR HAVE FIRE DAMPERS EQUIVALENT TO THE HOURLY FIRE RATING OF THE CONSTRUCTION.
11. ALL DRAWINGS ARE OF EQUAL IMPORTANCE IN DEFINING THE WORK OF THE CONTRACT DOCUMENTS. CONTRACTORS SHALL REVIEW ALL DRAWINGS BEFORE THE INSTALLATION OF THEIR WORK. SHOULD THERE BE A DISCREPANCY WITHIN AND BETWEEN THE DRAWINGS THAT WOULD CAUSE AN AWKWARD OR IMPROPER INSTALLATION NOTIFY ARCHITECT FOR CLARIFICATION PRIOR TO INSTALLATION OF SAID WORK. ANY WORK INSTALLED IN CONFLICT WITH THE ARCHITECTURAL DRAWINGS, SHALL BE CORRECTED BY CONTRACTOR AT THEIR EXPENSE AND AT NO ADDITIONAL COST TO THE OWNER OR ARCHITECT.
12. DO NOT SCALE DRAWINGS. THE DRAWINGS ARE NOT NECESSARILY TO SCALE - USE GIVEN DIMENSIONS. CONTRACTOR SHALL VERIFY ALL CONDITIONS AND DIMENSIONS AT THE JOB SITE PRIOR TO THE START OF CONSTRUCTION. IF DISCREPANCIES ARE FOUND, NOTIFY ARCHITECT FOR CLARIFICATION BEFORE COMMENCING THE WORK.
13. DETAILS NOT SHOWN ARE SIMILAR IN CHARACTER TO THOSE SHOWN. WHERE SPECIFIC DIMENSIONS, DETAILS, OR DESIGN INTENT CANNOT BE DETERMINED CONSULT ARCHITECT BEFORE PROCEEDING WITH THE WORK.
14. ALL PITCHED FLOOR AREAS SHOWN WITH PITCH LINES SHALL SLOPE AT 1/4" PER FOOT UNLESS OTHERWISE NOTED. PROVIDE A SLAB DEPRESSION AT ALL FLOOR DRAINS WHERE PITCH LINES ARE NOT SHOWN ON PLAN.
15. FINISH FLOOR ELEVATIONS ARE TO TOP OF CONCRETE, UNLESS OTHERWISE NOTED.
16. INSTALL ALL RECESSED CABINETS, PANELS, BOXES LOCATED IN FIRE-RATED PARTITIONS TO MAINTAIN THE FIRE-RATED CONSTRUCTION.
17. REFER TO MECHANICAL AND ELECTRICAL DRAWINGS AND MANUFACTURERS TEMPLATE DRAWINGS FOR ALL MECHANICAL AND ELECTRICAL EQUIPMENT SUPPORTS, BOLT SETTING TEMPLATES, ISOLATIONS, SPRING ISOLATION, ETC. NOT SHOWN ON THE DRAWINGS.
18. OWNER FURNISHED ITEMS THE G.C. SHALL COORDINATE AND PROVIDE ELECTRICAL, PLUMBING, AND MECHANICAL CONNECTIONS FOR ALL EQUIPMENT.

KEYPLAN

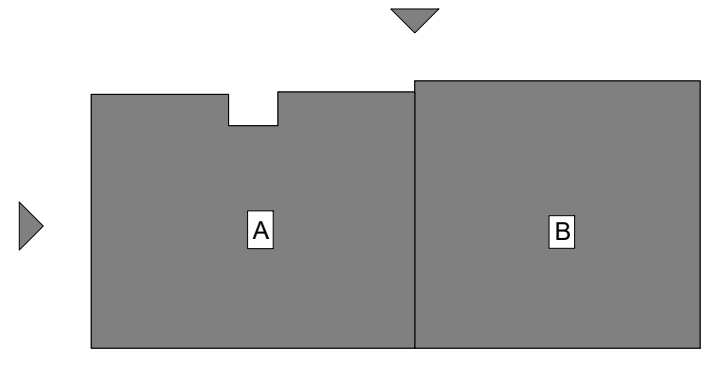

REV.	DESCRIPTION	DATE
1		
0	ISSUED FOR CONSTRUCTION	06 JUNE 2016



WBRC
ARCHITECTS ENGINEERS
WWW.WBRCAE.COM
BANGOR, MAINE 207-947-4511
PORTLAND, MAINE 207-528-4511
SARASOTA, FLORIDA 941-556-0757

ASYLUM
PROJECT:
BUILDING ELEVATIONS
SHEET TITLE:
WBRC CAD FILE: C:\Users\jocelyn.booth\Documents\407110 - ASYLUM DANCE CLUB - ARCH - asylum.booth.rvt
PROJECT No: 4071.10 GRAPHIC SCALE: 0" = 1"
SCALE: As Indicated
PROJECT MANAGER: JRB SHEET No:
DRAWN BY: JRB
CHECKED BY: JET/MEJ
AE203

6/7/2016 8:32:05 AM C:\Users\jocelyn.booth\Documents\407110 - ASYLUM DANCE CLUB - ARCH - asylum.booth.rvt