


KEY PLAN (Occupant Load Table 1004.1.2)

[Pattern]	A3 - ASSEMBLY	Unconcentrated 15 sq. ft. / person net
[Pattern]	RI - HOTEL	Concentrated 7 sq. ft. / person net
[Pattern]	BUSINESS	100 sq. ft. / person gross
[Pattern]	KITCHEN	200 sq. ft. / person gross
[Pattern]	EXERCISE ROOM, AND POOL	50 sq. ft. / person gross
[Pattern]	POOL DECK	15 sq. ft. / person gross
[Pattern]	STORAGE/MECHANICAL	300 sq. ft. / person gross
[Pattern]	MERCANTILE	60 sq. ft. / person gross

- EGRESS ANALYSIS**
- Lobby and egress access corridors:
First floor - three exists required and provided.
2nd, 3rd, 4th and 5th floors - two exists required and provided.
 - Exit signs: as shown on plans to be approved by local fire marshal's office.
 - Length of exit access travel, 250' per Table 1015.1 200' provided
- ♿ Accessible entrances and exists

PERMIT ISSUE - 09/27/07

NO.	REVISION	DATE
SCALE: As Noted	DRAWN BY: JR	
DATE:	CHECKED BY: JR	

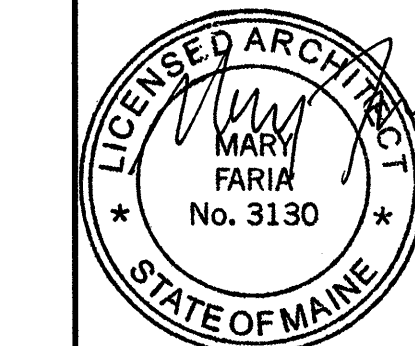

PROJECT

RESIDENCE INN BY MARRIOTT

PORTLAND, ME

JOB# 802

TITLE

CODE REVIEW - OCCUPANCY AND EGRESS

GROUP ONE

21 W. THIRD STREET, BOSTON, MA 02127
TEL. (617)268-7000 FAX: (617)268-0209

DRAWING NO.

A0.2