


424 Fore Street
Portland, ME 04101
Phone 207.842.2800
Fax 207.842.2828
www.cascobayengineering.com

CLIENT:
SUNNY TIME SOLAR LLC
PO BOX 15372
PORTLAND, ME 04101

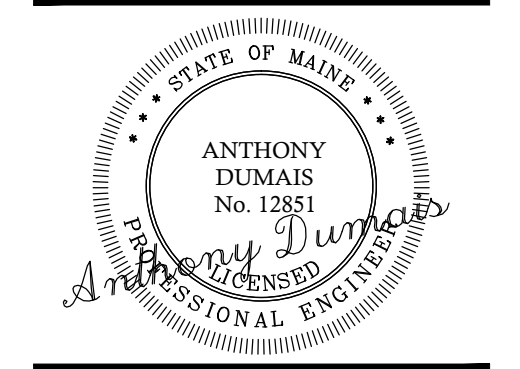

THE HAWK
48 HANCOCK STREET
PORTLAND, MAINE
PRELIMINARY
NOT FOR CONSTRUCTION
NEW BUILDING

GENERAL NOTES:

- 1. REFERENCE ARCHITECTURAL PLANS FOR DIMENSIONS NOT SHOWN. REFERENCE MECHANICAL, ELECTRICAL, AND ARCHITECTURAL PLANS FOR SIZES AND LOCATIONS OF WALL AND SLAB OPENINGS, DUCTS, PIPING, CURBS, AND EQUIPMENT PADS. IN THE EVENT OF A CONFLICT BETWEEN THE DRAWINGS, SPECIFICATIONS, OR NOTES ON THE DRAWINGS, THE ENGINEER SHALL BE NOTIFIED PRIOR TO CONSTRUCTION.
2. EXISTING DIMENSIONS AND CONDITIONS ARE FOR REFERENCE ONLY. CONTRACTOR SHALL VERIFY ALL EXISTING CONSTRUCTION AND DIMENSIONS IN THE FIELD PRIOR TO CONSTRUCTION OR FABRICATION. ALL DISCREPANCIES SHALL BE REPORTED TO THE ENGINEER PRIOR TO COMMENCING WORK.
3. THE CONTRACTOR SHALL NOTIFY THE ENGINEER IF DEVIATIONS OR CHANGES ARE REQUIRED TO THE CONTRACT DOCUMENTS OR APPROVED SHOP DRAWINGS DUE TO INTERFERENCES, FABRICATION ERRORS, OR OTHER CAUSES.
4. THE STRUCTURE IS SELF-SUPPORTING AND STABLE AFTER THE ENTIRE BUILDING IS COMPLETELY CONSTRUCTED. THE CONTRACTOR IS SOLELY RESPONSIBLE FOR ERECTION PROCEDURES AND SEQUENCING DURING CONSTRUCTION AND ERECTION TO PROVIDE AND ENSURE LOCAL AND OVERALL STABILITY OF THE BUILDING AND ITS COMPONENTS DURING CONSTRUCTION AND ERECTION. THE CONTRACTOR SHALL RETAIN A LICENSED STRUCTURAL ENGINEER TO DESIGN TEMPORARY BRACING/SHORING AND DETERMINE WHERE THE TEMPORARY BRACING/SHORING IS NEEDED.
5. THE CONTRACTOR SHALL BE RESPONSIBLE FOR ERECTION PROCEDURES, SEQUENCING AND FOR COMPLYING WITH ALL APPLICABLE SAFETY REGULATIONS DURING THE WORK.
6. ONE ELECTRONIC COPY OR TWO SETS OF HARD COPIES OF SHOP DRAWINGS SHALL BE SUBMITTED TO THE ENGINEER. ONE HARD COPY WILL BE RETURNED TO THE CONTRACTOR AND ONE HARD COPY WILL BE RETAINED BY THE ENGINEER.
7. REFERENCE THE PROJECT SPECIFICATIONS FOR MATERIAL, WORKMANSHIP AND ADDITIONAL INFORMATION NOT COVERED IN THESE NOTES (WHERE APPLICABLE)

DESIGN CRITERIA:

- 1. BUILDING CODES:
INTERNATIONAL BUILDING CODE (IBC), 2009 EDITION
ASCE 7-05 MINIMUM DESIGN LOADS FOR BUILDING AND OTHER STRUCTURES
MAINE UNIFORM BUILDING AND ENERGY CODE
2. LIVE LOADS:
FIRST FLOOR LIVING AREAS = 40 PSF
SECOND FLOOR SLEEPING AREAS = 30 PSF
3. SNOW LOADS:
GROUND SNOW LOAD (Pg) = 60 PSF
SNOW EXPOSURE FACTOR (Ce) = 1.0
SNOW LOAD IMPORTANCE FACTOR (Is) = 1.0
THERMAL FACTOR (Ct) = 1.1
FLAT ROOF SNOW LOAD (Pfl) = 46 PSF + DRIFT
4. WIND LOADS:
BASIC WIND SPEED = 100 MPH
IMPORTANCE FACTOR (Iw) = 1.0
WIND EXPOSURE C
MAIN WINDFORCE-RESISTING SYSTEM (INCLUDES WINDWARD + LEeward) = 26 PSF (ROOF LEVEL)
COMPONENTS & CLADDING - PER ASCE 7-05
5. SEISMIC CRITERIA:
BASED ON EQUIVALENT LATERAL FORCE PROCEDURE
OCCUPANCY CATEGORY II
SOIL SITE CLASSIFICATION = D
SEISMIC IMPORTANCE FACTOR (Ie) = 1.0
DESIGN SPECTRAL RESPONSE ACCELERATION PARAMETER:
Sds = .285
Sd1 = .125
SEISMIC DESIGN CATEGORY B
RESPONSE MODIFICATION COEFFICIENT (R) = 3.0 (STEEL FRAMES NOT DETAILED FOR SEISMIC RESISTANCE)
6.5 (WOOD FRAMED SHEAR WALLS)
SEISMIC RESPONSE COEFFICIENT (Cs) = 0.083

FOUNDATION NOTES:

- 1. FOUNDATIONS HAVE BEEN DESIGNED USING A PRESUMED ALLOWABLE BEARING PRESSURE PER TABLE 1806.2 OF THE INTERNATIONAL BUILDING CODE BASED ON TYPICAL SOILS FOUND IN THIS AREA. IF CLAY, MUD, ORGANIC SILT, PEAT OR UNPREPARED FILL IS FOUND DURING CONSTRUCTION, NOTIFY ENGINEER IMMEDIATELY, AS THE ALLOWABLE LOADS USED IN DESIGN WILL NEED TO BE VERIFIED BY A GEOTECHNICAL ENGINEER.
2. ALLOWABLE SOIL BEARING CAPACITY USED IN DESIGN = 2,000 PSF
3. MINIMUM FROST DEPTH COVER = 4'-6" FOR EXTERIOR FOOTINGS BELOW FINAL EXTERIOR GRADE.
4. EXCAVATION, BACKFILL, COMPACTION, GRADATION REQUIREMENTS, FOUNDATION DRAINAGE AND PERMANENT DEWATERING REQUIREMENTS SHALL BE PROVIDED BY A GEOTECHNICAL ENGINEER.
5. CONCRETE SLABS ON GRADE SHALL BE CONSTRUCTED ON A MINIMUM 12" THICK LAYER OF PROPERLY COMPACTED STRUCTURAL FILL.
6. FOUNDATIONS SHALL BEAR ON UNDISTURBED NATIVE SOIL, UNLESS NOTED OTHERWISE. THE CONTRACTOR SHALL NOTIFY THE GEOTECHNICAL AND STRUCTURAL ENGINEER IF ANY UNSUITABLE SOILS ARE ENCOUNTERED PRIOR TO PLACING FOUNDATIONS.
7. FOUNDATION WALLS AND SLAB-ON-GRADES SHALL REACH THEIR FULL 28 DAY COMPRESSIVE STRENGTH PRIOR TO BACKFILLING. THE CONTRACTOR SHALL PROVIDE TEMPORARY SHORING/BRAACING FOR WALLS WHEN BACKFILL IS PLACED PRIOR TO CONCRETE ACHIEVING ITS FULL 28 DAY STRENGTH.
8. PROTECT FOUNDATIONS FROM FROST AND KEEP BOTTOM OF TRENCH DRY DURING CONSTRUCTION. IF GROUNDWATER IS ENCOUNTERED NEAR OR ABOVE THE BASE OF THE FOOTINGS, EXCAVATIONS SHALL BE DEWATERED DURING CONSTRUCTION. SURFACE WATER SHALL BE DIVERTED AWAY FROM EXCAVATIONS.
9. DO NOT UNDERMINE EXISTING FOUNDATIONS OF ADJACENT STRUCTURES. CONTRACTOR SHALL BE RESPONSIBLE FOR THE SHORING AND BRACING OF EXISTING STRUCTURES DURING EXCAVATION, BACKFILLING, AND CONSTRUCTION. CONTRACTOR SHALL SLOPE EXCAVATIONS TO ACHIEVE SOIL STABILITY.

CONCRETE NOTES:

- 1. ALL WORK SHALL CONFORM TO THE LATEST EDITIONS OF "BUILDING CODE REQUIREMENTS FOR REINFORCED CONCRETE" (ACI 318) AND "SPECIFICATIONS FOR STRUCTURAL CONCRETE FOR BUILDINGS" (ACI 301)
2. REQUIRED CONCRETE PARAMETERS ARE AS FOLLOWS:
LOCATION MAX W/C RATIO f'c AIR-ENTRAINMENT
INT. WALLS/ELEV. SLABS .52 3,000 PSI 2% ± 1½%
FOUNDATIONS, FOOTINGS, & FOUNDATION WALLS .45 4,500 PSI 6% ± 1½%
INT. SLAB-ON-GRADE .45 4,500 PSI 2% ± 1½%
EXT. SLAB-ON-GRADE .45 4,500 PSI 6% ± 1½%
WHERE: W/C = WATER TO CEMENT RATIO AND
f'c = COMPRESSIVE STRENGTH OF CONCRETE AT 28 DAYS
USE PORTLAND CEMENT TYPE II, IN CONFORMANCE WITH ASTM 150
AIR ENTRAINING ADMIXTURES SHALL CONFORM TO ASTM C 260
ADMIXTURES SHALL CONFORM TO ASTM C 494
FLY ASH USED AS ADMIXTURES SHALL CONFORM TO ASTM C 618
3. MAXIMUM AGGREGATE SIZE SHALL BE ¾", IN CONFORMANCE WITH ASTM C33.
4. CALCIUM CHLORIDE OR ADMIXTURES CONTAINING CALCIUM CHLORIDE IS NOT PERMITTED.
5. MAXIMUM SLUMP AFTER THE ADDITION OF A WATER-REDUCING ADMIXTURE IS 6 INCHES.
6. CONTRACTOR SHALL NOT PLACE CONCRETE ON FROZEN GROUND OR IN WATER. ADEQUATE EQUIPMENT SHALL BE PROVIDED FOR HEATING CONCRETE MATERIALS AND PROTECTING CONCRETE DURING NEAR-FREEZING OR FREEZING WEATHER. REFERENCE ACI 306, AS NOTED ABOVE, FOR RECOMMENDATIONS FOR COLD WEATHER CONCRETING.
7. VERTICAL CONSTRUCTION JOINTS IN WALLS SHALL NOT EXCEED A SPACING OF 40 FEET, U.N.O.
8. ANCHOR BOLTS SHALL BE HEADED RODS AND CONFORM TO ASTM F1554, GRADE 36 KSI WELDABLE STEEL, U.N.O. ON DRAWINGS. PROVIDE GALVANIZED ANCHOR BOLTS WHERE IN CONTACT WITH PRESSURE TREATED LUMBER.
9. REINFORCING BARS SHALL CONFORM TO ASTM A615, GRADE 60, DEFORMED BARS.
10. WELDED WIRE FABRIC (WWF) SHALL CONFORM TO ASTM A185 AND BE PROVIDED IN FLAT SHEETS.
11. MINIMUM CONCRETE COVER FOR REINFORCEMENT SHALL BE AS FOLLOWS:
A. CONCRETE CAST AGAINST AND PERMANENTLY EXPOSED TO EARTH 3 INCHES
B. FORMED CONCRETE IN CONTACT WITH EARTH OR EXPOSED TO WEATHER 2 INCHES
C. CONCRETE NOT EXPOSED TO EARTH OR WEATHER IN SLABS & WALLS 1½ INCHES
12. WELDING OF REINFORCEMENT IS NOT PERMITTED.
13. PROVIDE NON-SHRINK GROUT BENEATH LEVELING PLATES & BEARING PLATES w/ MINIMUM COMPRESSIVE STRENGTH OF 5,000 PSI AT 28 DAYS.
14. PROVIDE CONTINUOUS REINFORCEMENT AT ALL CORNERS AND INTERSECTIONS, SEE TYPICAL FOUNDATION WALL DETAILS ON FOUNDATION DETAILS SHEET.
15. REINFORCING BARS AND ALL EMBEDDED ITEMS, INCLUDING ANCHOR BOLTS, MUST BE ACCURATELY PLACED AND ADEQUATELY SECURED BEFORE CONCRETE IS PLACED. "WET SETTING" OF EMBEDDED ITEMS INTO CONCRETE IS STRICTLY PROHIBITED.
16. UNLESS NOTED ON DRAWINGS, FOLLOW ACI STANDARDS FOR LAP SPLICE LENGTHS OF REINFORCING BARS.

WOOD NOTES:

- 1. ALL TIMBER FRAMING SHALL BE IN ACCORDANCE WITH THE LATEST EDITIONS OF THE AITC TIMBER CONSTRUCTION MANUAL AND AF&PA NATIONAL DESIGN SPECIFICATION FOR WOOD CONSTRUCTION (NDS).
2. ALL FRAMING SHALL BE SPRUCE-PINE-FIR, No.2 OR BETTER U.N.O. AND HAVE A MAXIMUM MOISTURE CONTENT OF 19%.
3. ALL WOOD IN CONTACT WITH MASONRY OR CONCRETE OR EXPOSED TO WEATHER SHALL BE PRESSURE TREATED (PT) SOUTHERN YELLOW PINE.
4. WHERE "LVL" IS NOTED ON DRAWINGS, PROVIDE VERSA LAM 3100 BY BOISE CASCADE, OR APPROVED EQUIVALENT, WHICH HAS THE FOLLOWING MINIMUM ALLOWABLE STRESSES:
Fb = 3100 PSI Fc = 2510 PSI (PARALLEL TO GRAIN)
Fv = 285 PSI Fc = 750 PSI (PERPENDICULAR TO GRAIN)
Ft = 1555 PSI E = 2,000,000 PSI
5. ALL ENGINEERED LUMBER THAT IS EXPOSED TO WEATHER SHALL BE WOLMANIZED.
6. ALL FLOOR SHEATHING SHALL BE ¾" TONGUE AND GROOVE, GLUED AND NAILED TO FLOOR FRAMING WITH 8d RINK SHANK NAILS AT 6" o.c. AT SUPPORTED PANEL EDGES, 12" o.c. AT INTERMEDIATE SUPPORTS.
7. ALL ROOF SHEATHING (5/8") AND WALL SHEATHING (1/2") SHALL BE APA PERFORMANCE-RATED. ATTACH TO SUPPORTED PANEL EDGES WITH 8d NAILS AT 6" o.c. AND AT INTERMEDIATE SUPPORTS WITH 8d NAILS AT 12" o.c. U.N.O. SEE DRAWINGS FOR MORE STRINGENT NAILING REQUIREMENTS AT WOOD SHEAR WALLS.
8. SHEATHING SHALL BE ORIENTED WITH LONG DIMENSION PERPENDICULAR TO THE SUPPORTS AND BE CONTINUOUS OVER TWO OR MORE SUPPORTS. STAGGER ALL JOINTS & PROVIDE ADEQUATE JOINT SPACING (1/8" TYP) AS RECOMMENDED BY MANUFACTURER.
9. PROVIDE FULL DEPTH BLOCKING AT ENDS AND INTERIOR SUPPORTS OF ALL JOISTS AND RAFTERS WHERE JOISTS AND RAFTERS FRAME OVER SUPPORTS. PROVIDE 1/3 DIAGONAL BRIDGING OR FULL DEPTH SOLID BLOCKING FOR EACH 8'-0" OF SPAN FOR ALL JOISTS AND RAFTERS.
10. WHERE BEAMS ARE LABELED ON PLAN, DO NOT SPLICE BEAM NOR ANY PLY OF BEAM BETWEEN SUPPORTS.
11. ALL CONNECTION HARDWARE SHALL BE BY SIMPSON STONG-TIE (OR APPROVED EQUIVALENT) AND SHALL BE HOT-DIPPED GALVANIZED. HARDWARE IN CONTACT WITH PRESSURE TREATED (PT) LUMBER SHALL BE GALVANIZED G185 (ZMAX). REFER TO MANUFACTURERS LITERATURE FOR PROPER INSTALLATION GUIDELINES.
12. FASTENERS USED IN CONTACT WITH PRESSURE TREATED (PT) LUMBER SHALL BE HOT-DIPPED GALVANIZED, STAINLESS STEEL, OR OTHER FINISH APPROVED BY ENGINEER.
13. ALIGN COLUMNS SUCH THAT COLUMNS BEAR CONTINUOUSLY TO FOUNDATION SUPPORT. INSTALL ADDITIONAL SOLID BLOCKING WITHIN FLOOR PACKAGE TO PROVIDE CONTINUITY OF LOAD PATH.
14. PROVIDE HORIZONTAL BLOCKING FOR ALL LOAD BEARING WALLS AT 4'-0" O.C. VERTICAL, MAXIMUM.
15. SUBMIT SHOP DRAWINGS FOR ALL PREFABRICATED WOOD JOISTS AND WALL PANELS TO ENGINEER FOR REVIEW PRIOR TO CONSTRUCTION.

STRUCTURAL STEEL NOTES:

- 1. STRUCTURAL STEEL WORK SHALL CONFORM TO LATEST EDITIONS OF AISC "SPECIFICATION FOR THE DESIGN FABRICATIONS, AND ERECTION OF STRUCTURAL STEEL" AND THE "CODE OF STANDARD PRACTICE"
2. STRUCTURAL STEEL MEMBERS SHALL BE IN CONFORMANCE WITH THE FOLLOWING:
WIDE FLANGE SHAPES AND TEES ASTM A992
ANGLES, PLATES, CHANNELS ASTM A36, Fy=36 KSI (U.N.O.)
SQUARE/RECTANGULAR HSS ASTM A500, GRADE B, Fy=46 KSI
ROUND HSS ASTM A500, GRADE B, Fy=42 KSI
STEEL PIPE ASTM A53, TYPE E OR S, GRADE B, Fy=35 KSI
3. SHOP DRAWINGS SHALL BE SUBMITTED TO THE STRUCTURAL ENGINEER FOR REVIEW PRIOR TO COMMENCING FABRICATION.
4. FIELD CONNECTIONS SHALL UTILIZE MINIMUM ¾" DIAMETER A325 HIGH STRENGTH BOLTS, U.N.O. BOLTED CONNECTIONS SHALL BE SLIP CRITICAL AT ALL MOMENT FRAMES, BRACED FRAMES, AND AT ADDITIONAL LOCATIONS INDICATED "SC" IN THE DRAWINGS. SLIP CRITICAL CONNECTIONS SHALL UTILIZE LOAD INDICATOR WASHERS OR TENSION CONTROL BOLTS. USE A490 BOLTS WHERE INDICATED ON DRAWINGS.
5. CONTRACTOR IS RESPONSIBLE FOR DESIGN OF CONNECTIONS NOT ALREADY DETAILED ON STRUCTURAL DRAWINGS. DESIGN SHALL BE STAMPED BY A LICENSED STRUCTURAL ENGINEER AND SUBMITTED PRIOR TO COMMENCING FABRICATION.
6. WELDING SHALL CONFORM TO AWS D1.1. USE LOW-HYDROGEN SMAW ELECTRODES WITH MINIMUM TENSILE STRENGTH OF 70 KSI.
7. PROVIDE ½" LEVELING PLATES UNDER ALL COLUMN BASE PLATES, U.N.O. LEVELING PLATES SHALL BE SET AND GROUTED PRIOR TO COLUMN ERECTION.
8. ALL STRUCTURAL STEEL NOT EXPOSED TO WEATHER SHALL RECEIVE ONE COAT OF STANDARD SHOP PRIMER, U.N.O.
9. SEE DRAWINGS AND CONCRETE NOTES FOR ANCHOR BOLT INFORMATION.

ABBREVIATIONS:

Table with 4 columns: Abbreviation, Description, Unit/Type, and Material/Property. Includes entries for AB (Anchor Bolt), ADDL (Additional Architect), ARCH & (Architect), B/FTG, BOF (Bottom of Footing), BM (Beam), BOT (Bottom), BRG (Bearing), BTWN (Between), C (Structural Steel Channel), CANT (Cantilever), OP (Cast-in-place concrete), CJ (Control Joint), CLR (Clear), CMU (Concrete Masonry Unit), ONJ (Construction Joint), COL (Column), CONC (Concrete), CONN (Connection), CONT (Continuous), CONTR (Contractor), CP (Complete Penetration Weld), CY (Cubic Yard), DIA (Diameter), DIM (Dimension), DISCONT (Discontinuous), DWG (Drawing), (E), EX, EXIST (Existing), EA (Each), EF (Each Face), EL, ELEV (Elevation), EQ (Equal), EQUIP (Equipment), ES (Each Side), EW (Each Way), EXP (Expansion), EXT (Exterior), F (Footing Designation), FDN (Foundation), FF (Finish Floor), FLG (Flange), FLR (Floor), FT (Foot), FTG (Footing), FV (Field Verify), G (Gage), GALV (Galvanized), HOR, HORIZ (Horizontal), HSS (Hollow Structural Shape), HT (Height), IF (Inside Face), IN (Inch), INFO (Information), JT (Joint), K (KIP), KSI (KIPS PER SQUARE INCH), L (Angle), LL (Double Angle), LB (Pound), LF (Linear Foot), LLH (Long Leg Horizontal), LLV (Long Leg Vertical), MAX (Maximum), MECH (Mechanical), MFR (Manufacturer), MIN (Minimum), MISC (Miscellaneous), NF (Near Face), NO (Number), NS (Near Side), NTS (Not to Scale), OC (On Center), OF (Outside Face), OPNG (Opening), OPPOSITE (Opposite), P (PIER DESIGNATION), PL (Plate), PP (PARTIAL PENETRATION WELD), PREFAB (PREFABRICATED), PSF (POUNDS PER SQUARE FOOT), PSI (POUNDS PER SQUARE INCH), REINF (REINFORCING STEEL), REQ, REQD (REQUIRED), RD (ROOF DRAIN), SC (SLIP CRITICAL), SECT (SECTION), SHEATH (SHEATHING), SIM (SIMILAR), SOG (SLAB-ON-GRADE), SPAC (SPACING), SPECS (SPECIFICATIONS), SS (STAINLESS STEEL), STD (STANDARD), STIFF (STIFFENER), STL (STEEL), STR (STRAIGHT), STRUCT (STRUCTURAL), T (TOP), T&B (TOP AND BOTTOM), TOC, T/CONC (TOP OF CONCRETE), T/FTG, TOF (TOP OF FOOTING), TEMP (TEMPERATURE), T/SHELF (TOP OF SHELF), T/SLAB (TOP OF SLAB), T/STL (TOP OF STEEL), T/WALL (TOP OF WALL), TYP (TYPICAL), UNO (UNLESS NOTED OTHERWISE), VER, VERT (VERTICAL), VF (VERIFY IN FIELD), W (STRUCTURAL STEEL WIDE FLANGE), W/ (WITH), W/O (WITHOUT), WP (WORK POINT), WT (WEIGHT), WWF (WELDED WIRE FABRIC)

ISSUED table with columns: No., Description, Date, and Issue For Permit - Not For Construction. Includes a row for 'A' with a date of 12-29-14.

SHEET TITLE:
STRUCTURAL NOTES
DESIGNED: TD
DRAWN: TD
DATE: 11-13-14
PROJECT NUMBER: 14-135

S0.0