

**Submittal Data: 9RLFW  
ASU9RLF & AOU9RLF**



Job Name: \_\_\_\_\_ Location: \_\_\_\_\_  
Purchaser: \_\_\_\_\_  
Engineer: \_\_\_\_\_  
Submitted To: \_\_\_\_\_ For:  Reference  Approval  Construction  
Submitted By: \_\_\_\_\_  
Unit Designation: \_\_\_\_\_ Schedule No. \_\_\_\_\_ Model No.: \_\_\_\_\_

**Capacities:**

Cooling	9,000 BTU/h
Outdoor Design Temp. <i>F° DB/WB</i>	95/75
Heating	12,000 BTU/h
Outdoor Design Temperature <i>F° DB/WB</i>	47/43
HSPF	11.0
SEER	23.0
EER <i>Cooling/Heating</i>	13.8/13.47
Voltage/Frequency/Phase	208-230/60/1

**Indoor Unit:**

Noise Level Cooling <i>db (A) - H/M/L/Q</i>	37/ 33/ 29/ 25
Noise Level Heating <i>db (A) - H/M/L/Q</i>	37/ 33/ 29/ 25
Weight	18 lbs.

**Outdoor Unit:**



Noise Level <i>Cooling/Heating</i>	48/48
Recommended Fuse Size	15A
Min. Ampacity	4.2A
Running Current <i>Cooling</i>	6.0A
Running Current <i>Heating</i>	7.5A
Weight	71 lbs.

**Refrigerant Piping:**

Max Ht. Difference	49 ft.
Max Total or Combined Length	66 ft.
Discharge Vapor Line (O.D.)	1/4 in.
Suction (O.D.)	3/8 in.

- ◆ Seven year compressor warranty
- ◆ Five year parts warranty
- ◆ Digital wireless remote control
- ◆ Auto Louver: Up/Down
- ◆ ENERGY STAR® Qualified
- ◆ Built in Low Ambient to 14°F
- ◆ Auto Restart/ Reset
- ◆ 24 hour timer
- ◆ Optional Wired Remote Control
- ◆ Dry mode
- ◆ Refrigerant R410A
- ◆ Quiet Mode

**OUTLINE AND DIMENSIONS**

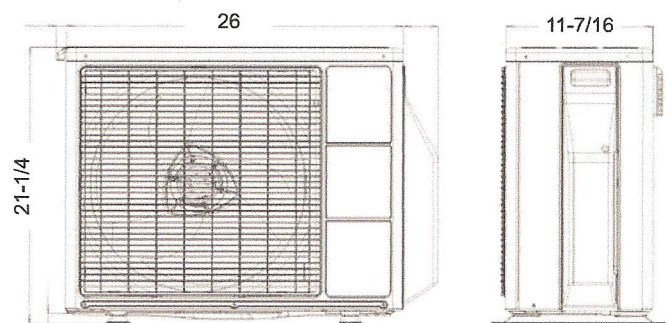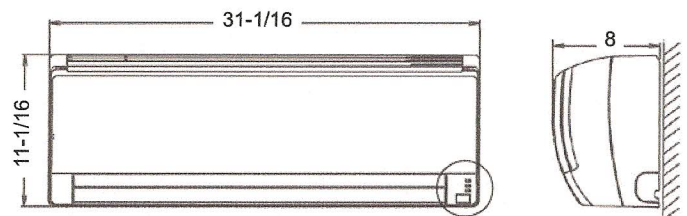

**Notes:**

\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_