


- NOTES:
1. INSTALL ROOF CURBS AND VIBRATION DAMPENING MOUNTS @ ALL MECHANICAL EQUIPMENT
 2. ALL VERTICAL ROOF DRAIN RUNS SHALL BE SOUND INSULATED W/ 4.5" CLOSED CELL SPRAY FOAM INSULATION BOTH SIDES, 8-10" TOTAL. ALL HORIZONTAL RUNS SHALL BE PIPED IN DUCTAL IRON AND SPRAY FOAM INSULATED IN THICKNESS TO MATCH VERTICAL PIPING FOR SOUND CONTROL ABOVE THE 4TH FLOOR LIVING UNITS.
 3. PROVIDE FLASHING CURBS OR BOOTS @ ALL THRU-ROOF LOCATIONS. FLASH ALL ROOF/WALL JUNCTURES.
 4. SEE MECHANICALS AND PLUMBING DRAWINGS FOR QUANTITIES OF ROOF PENETRATIONS
 5. SEE CIVIL DRAWINGS FOR ROOF STORM WATER DRAINAGE LOCATION
 6. SEE THE INTERIOR UNIT FLOOR PLAN NOTES FOR SYSTEMS VENTING THRU THE ROOF
 7. PROVIDE (3) UNSUITABLE SOILS AND RADON PIPE VENT LOCATIONS THRU ROOF WITH MOTORIZED FANS AT TIME OF CONSTRUCTION
 8. THE TRASH ROOM SHALL BE VENTED TO THE ROOF. LOCATE VENT AWAY FROM UNIT DECKS AT THE ROOF.
 9. SECONDARY OVERFLOW ROOF DRAINS SHALL FOLLOW THE PRIMARY SYSTEM AND EXTEND TO THE CITY STORM WATER DRAIN AS SHOWN ON NEWBURY STREET. THE SECONDARY LINES SHALL BE SOUND INSULATED PER NOTE 2.
 10. INCLUDE ALL TAPERED CANTS FOR BUDGETARY PRICING SHOWN OR OTHERWISE.

WALL LEGEND

STUD WALL	
CMU WALL	
BRICK WALL	
FIRE RATED WALL	
1/2 HOUR	
1 HOUR	
2 HOUR	

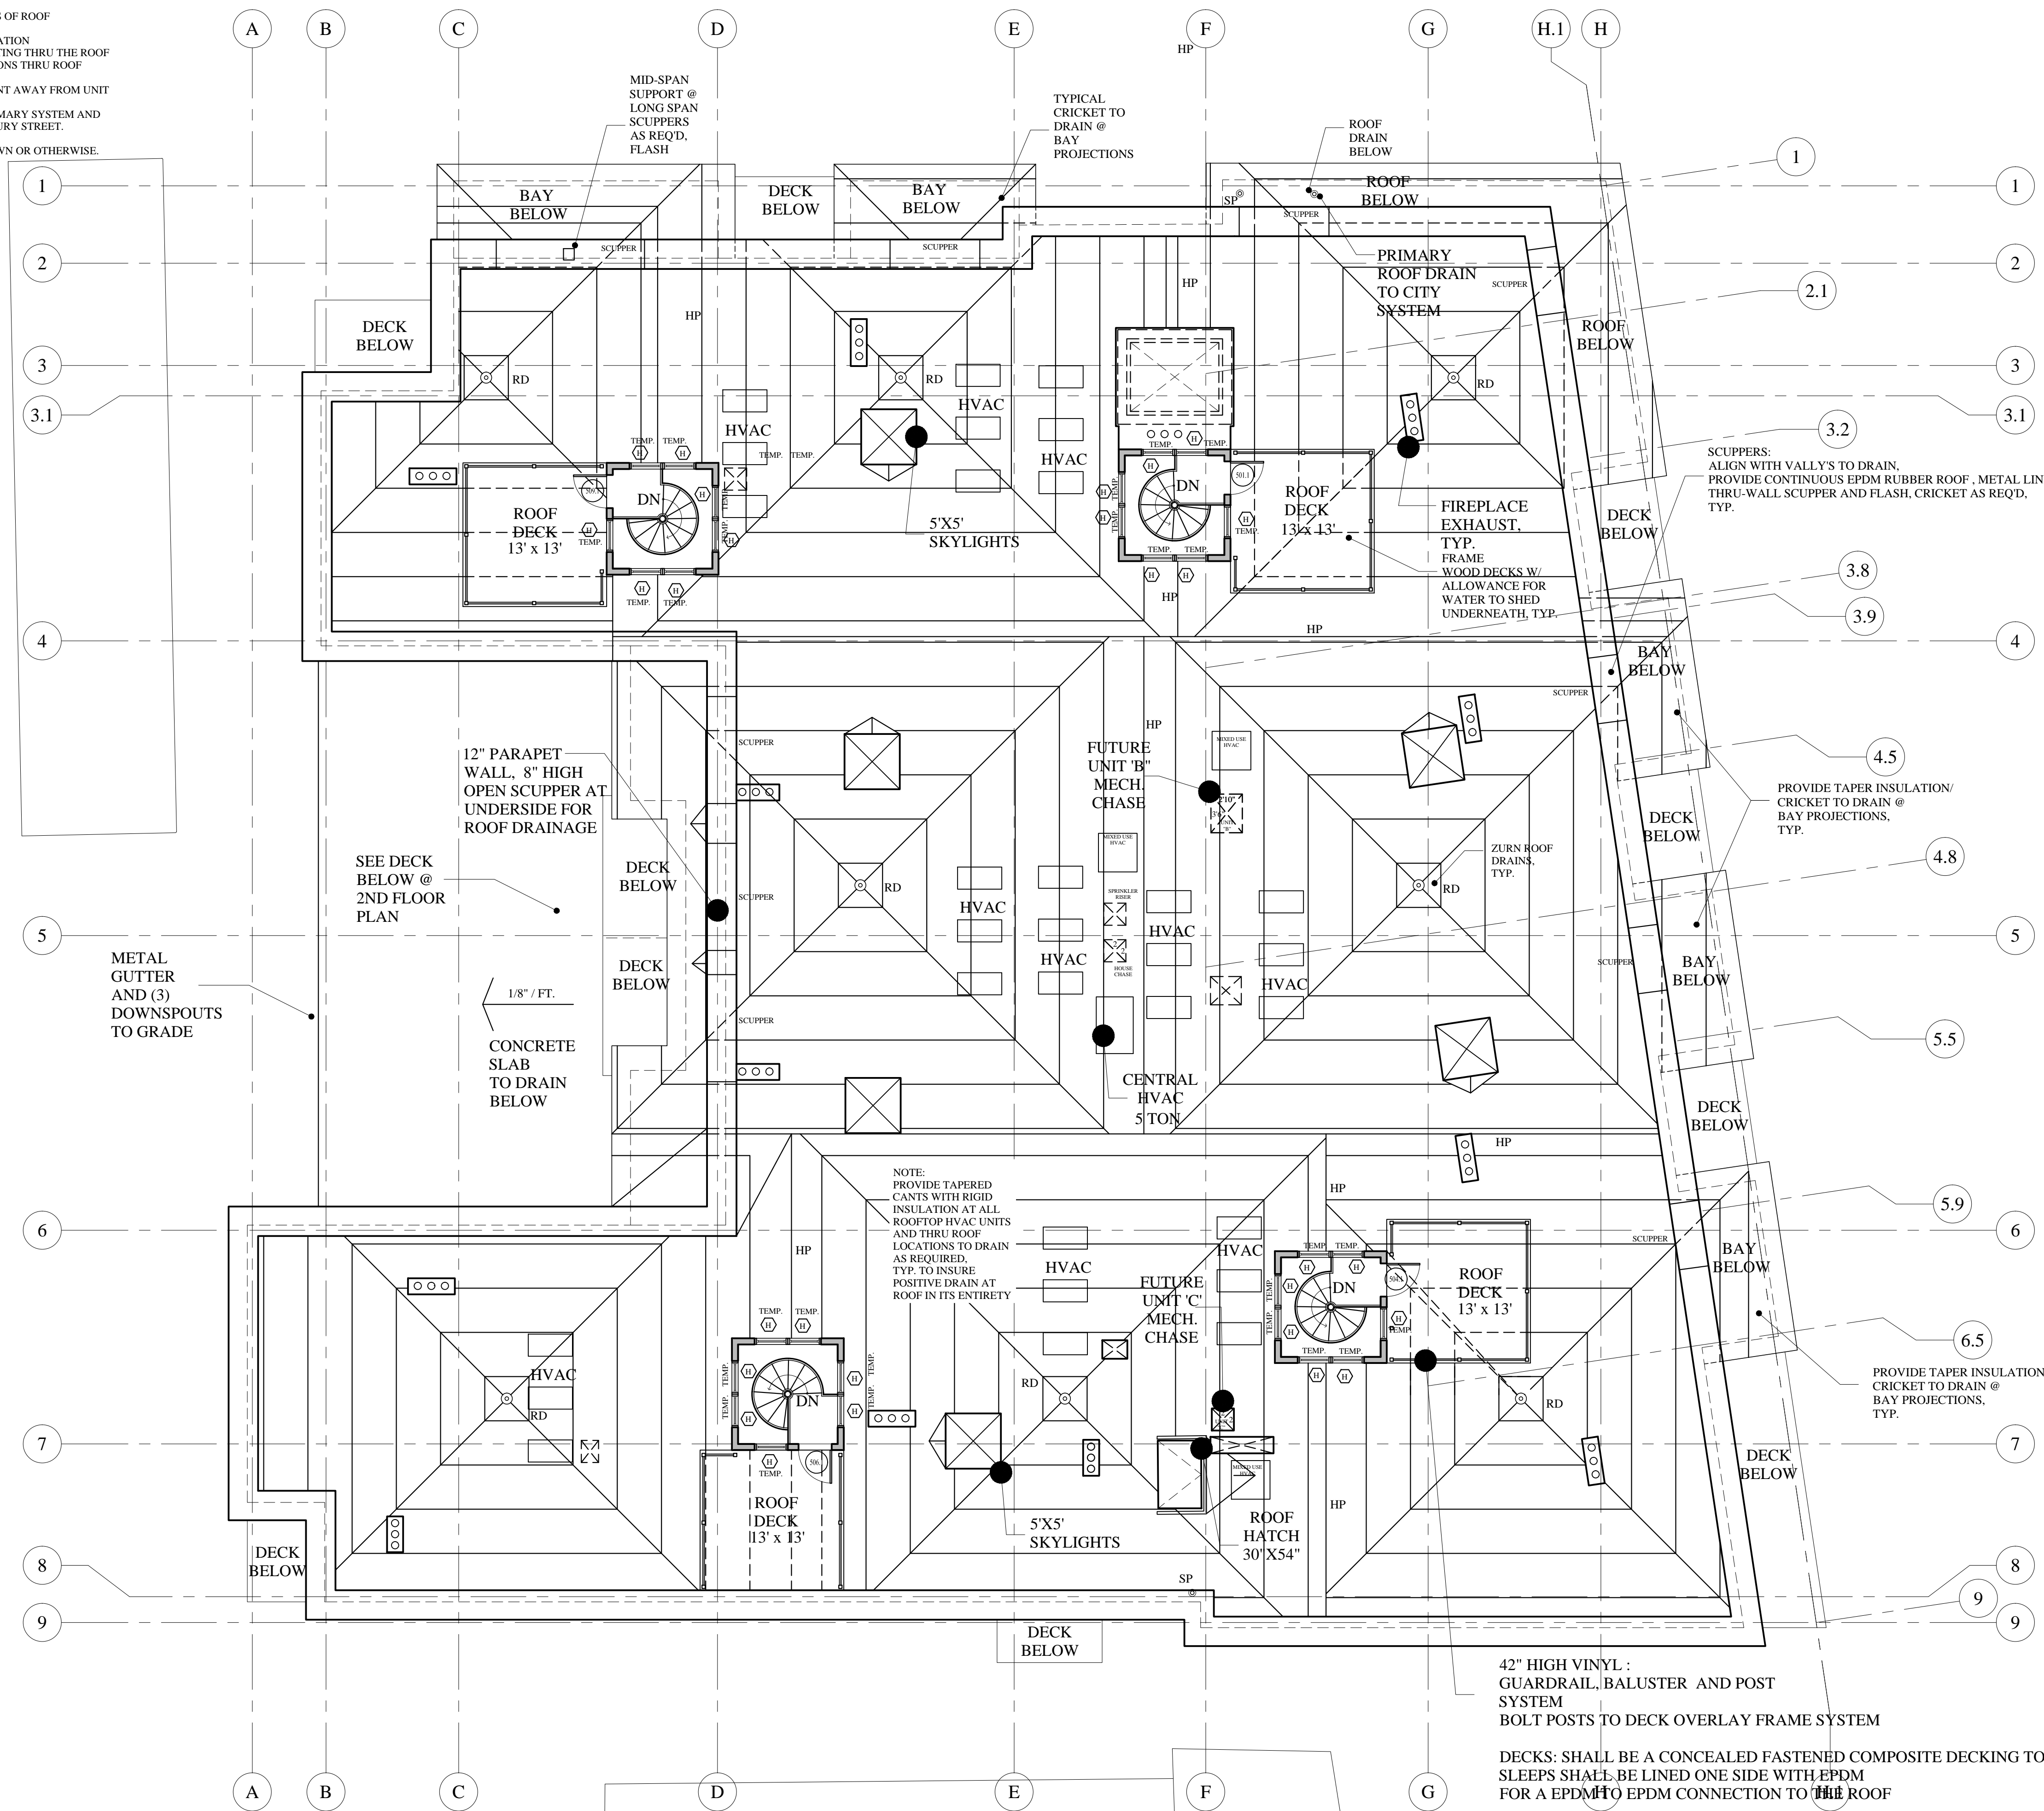

ROOF FLOOR PLAN
SCALE: 1/8"=1'-0"

42" HIGH VINYL :
GUARDRAIL, BALUSTER AND POST
SYSTEM
BOLT POSTS TO DECK OVERLAY FRAME SYSTEM

DECKS: SHALL BE A CONCEALED FASTENED COMPOSITE DECKING TO P.T. SLEEPERS.
SLEEPERS SHALL BE LINED ONE SIDE WITH EPDM
FOR A EPDM TO EPDM CONNECTION TO THE ROOF

PROVIDE FLASHED THRU ROOF DECK CORNER POSTS TO RESIST WIND UPLIFT
TYPICAL

FOUNDATION PERMIT
JULY 8, 2016



**MARK
MUELLER
ARCHITECTS**
A.I.A.
100 Commercial Street
Suite 205
Portland, Maine 04101
Phone: 207.774.9057
Email:
rfi@muellerarchitects.com

© COPYRIGHT 2016
MARK MUELLER ARCHITECTS

62

I
N
D
I
A

INDIA STREET
NEIGHBORHOOD
PORTLAND, MAINE

ROOF FLOOR PLAN

REVISIONS	DATE
PROJECT	INDIA STREET
DRAWN BY	
CHECKED BY	MM

A-1.5