

9/14/2017 1:42:34 PM GMC

TECHNOLOGY MATRIX					BOX TYPE		OUTLET TYPE	CABLING								
GENERAL TECHNOLOGY NOTES					SINGLE GANG DEVICE RING IN 4x4 SQ	SINGLE GANG BOX	DOUBLE GANG BOX	TYPE F OUTLET AND PLATE	4 PAIR UTP CATEGORY 6 CABLING	RG-11 75 OHM COAX						
1	PROVIDE CABLING, BOXES, CONDUIT, ETC WHERE FOR ALL TEL/DATA AND SECURITY OUTLETS.															
2	IN AREAS WITH AND WITHOUT CEILINGS PROVIDE CONDUIT TO ABOVE NEAREST ACCESSIBLE CEILING.															
3	ALL VOICE/DATA OUTLETS, TERMINATIONS, SECURITY DEVICES, AND PLATES SHALL BE BY OWNER UNLESS NOTED OTHERWISE.															
4	PROVIDE COMPLETE CATV SYSTEM (SERVICE, CABLING, TERMINATIONS, OUTLETS, PLATES, ETC)															
5	ALL CABLING SHALL BE RUN FROM OUTLET LOCATION TO THE TEL/CATV DEMARC LOCATION IN ROOM 116.															
6	FOR THE CABLING THAT IS TERMINATED BY OTHERS, PROVIDE 3' OF SLACK AT BOX LOCATION AND 6' OF SLACK AT THE TEL/CATV DEMARC IN ROOM 116.															
SYMBOL	MTG HT AFF UNO	DESCRIPTION	KEY NOTE	CONDUIT SIZE												
(A)	18"	VOICE AND DATA OUTLETS		3/4"		X			2							
(D)	18"	DATA OUTLET		3/4"		X			1							
(D2)	18"	DATA OUTLETS		3/4"		X			2							
(TV)	18"	CATV OUTLET		1"		X	1									
(W)	45"	WALL PHONE OUTLET		3/4"	X				1							
(WA)		WIRELESS ACCESS DATA OUTLET ABOVE CEILING				X			1							

NOTES:
1. MOUNTING HEIGHT AS NOTED ON PLANS

TYPE	DESCRIPTION	MFR	CATALOG SERIES NUMBER SEE NOTE 1	MOUNTING	VOLTS	LAMP				KEY NOTES
						QTY PER FIXTURE	WATTS	LUMENS	TYPE	
A	DECORATIVE PENDANT	WAC	MP LED481	PENDANT	120	1	5.6	362	LED ARRAY 3000K	4
B	WALL SCNCE	RESTORATION HARDWARE	GRAND EDISON CAGED SCNCE	WALL	120	1	40		T8 x 11-3/4" INCAND	4
C	DECORATIVE PENDANT	RESTORATION HARDWARE	EDISON CAGED PENDANT	PENDANT	120	1	30		T10 x 7-1/2" INCAND	4
D	PENDANT SWAG CHANDELIER	HANGOUT LIGHTING	9-PENDANT LIGHT SPIDER - BLACK	PENDANT	120	9	5.5	574	MEDIUM BASE FILAMENT LED	
E	WALL SCNCE	ULTRALIGHTS	INVICTA 16351	WALL	120	1	6	750	LED ARRAY 3000K	4
H	RECESSED WALL WASHER	ALPHABET LIGHTING		RECESSED	120	1			LED ARRAY 3000K	
J	6" RECESSED DOWNLIGHT	ALPHABET LIGHTING	NUGRD/DM19/83CRI/SPECULAR CLEAR 55 DEGREE REFLECTOR, MATTE CHROME TRIM AND BEZEL	RECESSES	120	1			LED ARRAY 3000K	
P	48" LENSED STRIP	STARTEK	SP-L-4-CA	SURFACE	120	1	16.8	2086	LED ARRAY 3500K	
Q	24" LENSED STRIP	METALUX	2SNLED-LN-SEMI FROST LENS NARROW	SURFACE	120	1	17.13	1907	LED ARRAY 4000K	
S	INDOOR SPOT	ETC	SOURCE FOUR MINI LED	CEILING SURFACE	120				LED	
T	SURFACE UTILITY STRIP	METALUX	4SNLED-LD5-18SL-LN-UNV	SEE PLAN	120	1	14.6	1898	LED ARRAY 3000K	
U	17" UNDERCABINET LED	JESCO	S650-1703	SURFACE	120	1	3.5	375	LED ARRAY 4000K	3.5
W	OUTDOOR WALL PACK	HUBBELL	LNC-TYPE 1V DISTRIBUTION, 5 LEDS, BRONZE HOUSING	WALL xx AFF	120	1	13	1053	LED ARRAY 4000K	
Z	2X2' RECESSED	METALUX	22CZ LD4 WITH SMOOTH FROSTED ACRYLIC LENS	RECESSED	120	1	22.6	2220 DELIVERED	LED ARRAY 3000K	
	EXIT SIGN	SURELITES		NOTE 2					LED ARRAY	2

LUMINAIRE SCHEDULE GENERAL NOTES

- CATALOG SERIES NUMBERS ARE USED TO ESTABLISH A LEVEL OF QUALITY AND NOT INTENDED TO LIMIT COMPETITION. SERIES NUMBERS ARE NOT COMPLETE CATALOG NUMBERS. COMPLY WITH ADDITIONAL REQUIREMENTS IN SPECIFICATIONS AND DRAWINGS.
- FIELD DIMENSION WALL COVE, WALL VALENCE AND WALL SLOT LIGHTING PRIOR TO ORDERING TO ENSURE PROPER FIXTURE LENGTHS. NOTIFY ARCHITECT OF ANY DISCREPANCIES IN LENGTHS SHOWN ON DRAWINGS AND ACTUAL FIELD DIMENSIONS. ADJUST LENGTHS OF ANY SPECIFIED FIXTURE AS DIRECTED BY ARCHITECT.
- EXCEPT AS INDICATED OTHERWISE ON FIXTURE SCHEDULE, SUSPENDED LIGHT FIXTURES SHALL BE FURNISHED AND INSTALLED COMPLETE WITH STEEL STEM SETS, AND PIECES AND ALIGNERS WITH ALIGNER TYPE CANOPIES AS MANUFACTURED BY RESPECTIVE FIXTURE MANUFACTURER.
- PENDANT MOUNTING HEIGHTS ARE TO BOTTOM OF FIXTURE. VERIFY EXACT MOUNTING HEIGHTS OF PENDANT FIXTURES WITH ARCHITECT PRIOR TO ROUGHING.
- WALL MOUNT FIXTURE HEIGHTS ARE TO CENTERLINE UNLESS NOTED OTHERWISE. VERIFY EXACT MOUNTING HEIGHTS AND LOCATIONS OF WALL MOUNTED LIGHTING WITH ARCHITECT PRIOR TO ROUGHING.
- REFER TO REFLECTED CEILING PLANS FOR EXACT LOCATION OF CEILING MOUNTED LIGHTING AND DEVICES.
- PROVIDE TRIM AND MOUNTING ACCESSORIES FOR RECESSED LIGHTING FIXTURES WHICH ARE COMPATIBLE WITH THE TYPE OF CEILING CONSTRUCTION IN WHICH THEY ARE TO BE MOUNTED. REFER TO REFLECTED CEILING PLANS AND ROOM FINISH SCHEDULES.
- LIGHT FIXTURE LOCATIONS IN MECHANICAL ROOMS AND ELECTRIC ROOMS ARE APPROXIMATE. INSTALL LIGHTING TO AVOID DUCTWORK, PIPING AND ELECTRICAL ITEMS.
- PENDANT LINEAR FIXTURES SHALL SATISFY LENGTHS SHOWN ON DRAWINGS.
- PROVIDE WIRE GUARDS WHERE INDICATED ON FLOOR PLANS.

29 BLACK POINT ROAD
SCARBOROUGH, MAINE 04074
207-883-4307
WWW.GAWRONTURGEON.COM

**GAWRON
TURGEON
ARCHITECTS, P.C.**

cPort Credit Union
50 India Street
Portland, Maine

REVISIONS

#	DATE	DESCRIPTION
1	09.14.17	PERMIT SET NOT FOR CONSTRUCTION


DATE:	09.14.17
PROJECT #	010416
DRAWN BY:	GMC
CHECKED BY:	SRM
DRAWING SCALE	AS NOTED

SHEET TITLE

LUMINAIRE SCHEDULE/LEGEND

E001

© COPYRIGHT 1985-2017
REPRODUCTION OR RELEASE OF
THIS DOCUMENT WITHOUT
WRITTEN PERMISSION OF
GAWRON ARCHITECTS IS PROHIBITED

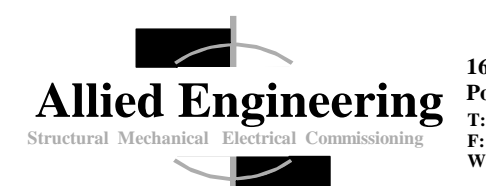

Allied Engineering
Structural Mechanical Electrical Commissioning
160 Veranda Street
Portland, Maine 04103
T: 207-221-2200
F: 207-221-2266
Web: www.allied-eng.com

AEI PROJECT NO.: 16025 CAD FILE: 16025_E.rvt