


Standard Details

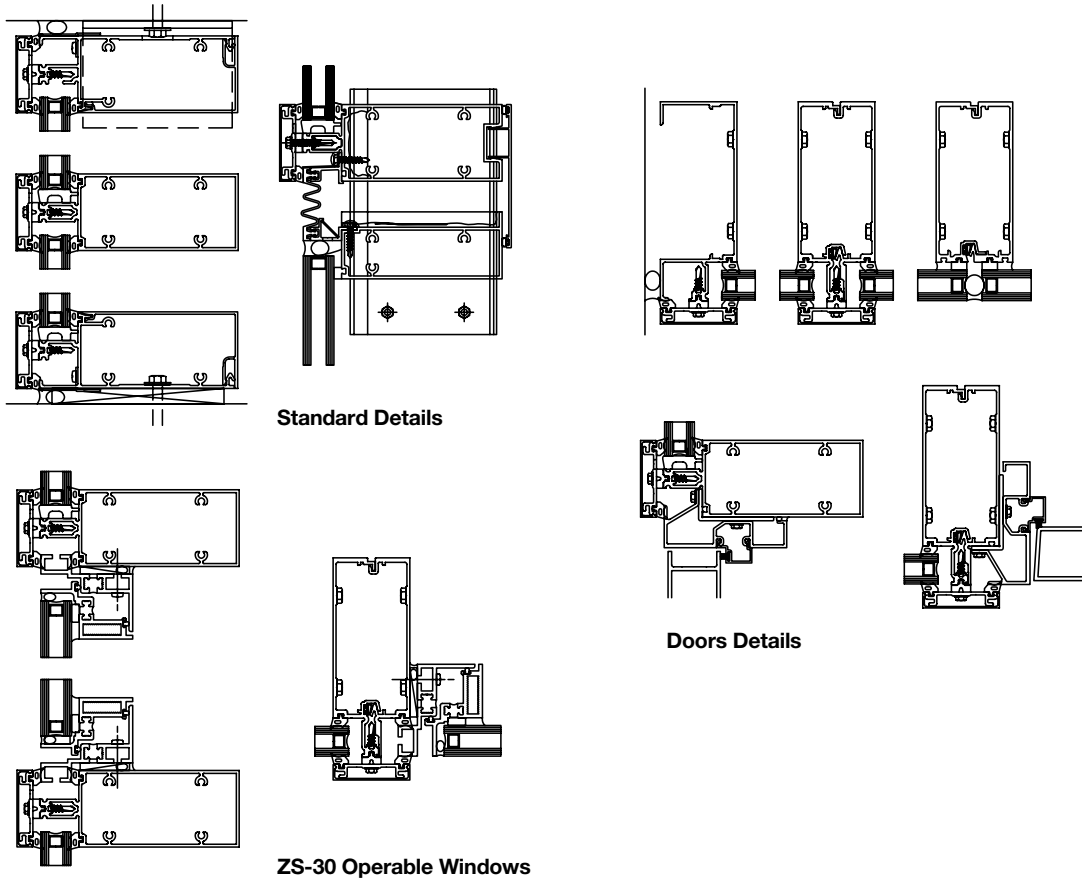

Performance

▪ Air Infiltration:	<.06 CFM/SQ FT (6.24 PSF) per ASTM E283
▪ Static Water:	15 PSF per ASTM E331
▪ Dynamic Water:	15 PSF per AAMA 501.1
▪ Deflection Load:	40 PSF per ASTM E330
▪ Structural Load:	60 PSF per ASTM E330
▪ Seismic:	Three levels of deflection per AAMA 501.4
▪ STC:	32 (1/4" - 1/2" - 1/4" glazing) 37 (1/4" lam - 1/2" - 1/4" lam glazing)
▪ Thermal performance per AAMA 1503 for clear 1" insulating glass:	
	- U-factor = 0.67 - CRF frame = 65
▪ NFRC certified	
▪ Thermal Performance Characteristics per AAMA 507	
▪ AAMA 501.7 Vertical Interstory Drift Movement +/- 1/2"	