


General Mechanical Notes:
 1. All packaged rooftop AC units are Trane, Lennox, or equal, 1½ - 8½ ton, gas-fired with economizers, 30000 cfm each, variable air volume.
 2. Supply air ductwork shall have 2" thick fiberglass ductwrap w/ FSK.
 3. Provide combination fire / smoke dampers (FD / SD) at all locations where the ducts penetrate the shaft wall enclosures for ducts that penetrate two (2) or more floors. For ducts that only penetrate one (1) floor, fire dampers are required.

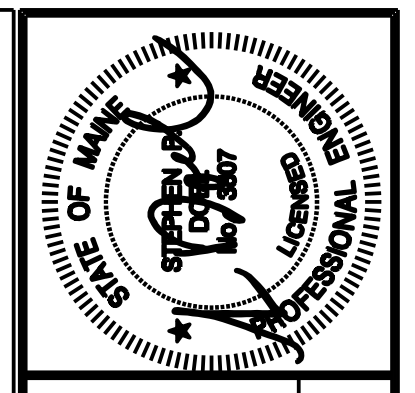

Prepared For:
Archetype
 Union Wharf
 Portland, ME 04101

Consultant:
BENNETT ENGINEERING
 MECHANICAL • ELECTRICAL
 (207) 865-9475

Architect:
ARCHETYPE architects
 48 Union Wharf Portland, Maine 04101
 (207) 772-4022 ARCHETYPE@ARCHETYPEPA.COM

Project:
16 MIDDLE STREET OFFICE BUILDING
 MIDDLE STREET
 PORTLAND, MAINE

Revisions:
 06/01/2016: CD ISSUE

Date:
 1 JUNE 2016
 Scale:
 1/8" = 1'-0" U.N.O.
 HVAC 2, 4, 5 FLOOR PLANS

M1.02