DOOR AND FRAME SCHEDULE

MARK	DOOR SIZE WD	DOOR SIZE HGT	DOOR SIZE THK	DOOR TYPE	DOOR MATL	DOOR GLAZING	FRAME MATL	FRAME EL	FIRE RATING LABEL	NOTES
150A	3'-0"	6'-8"	1 3/4"	A	WD	--	HM	1	--	--
151A	3'-0"	6'-8"	1 3/4"	A	WD	--	HM	1	--	--
152A	3'-0"	6'-8"	1 3/4"	A	WD	--	HM	1	--	--
153A	3'-0"	6'-8"	1 3/4"	A	WD	--	HM	1	--	--
154A	3'-0"	6'-8"	1 3/4"	A	WD	--	HM	1	--	--
155A	3'-0"	6'-8"	1 3/4"	A	WD	--	HM	1	--	--
157A	3'-0"	6'-8"	1 3/4"	A	WD	--	HM	1	20 MIN	Door with closer
158A	3'-0"	6'-8"	1 3/4"	A	WD	--	HM	1	--	--
159A	3'-0"	6'-8"	1 3/4"	A	WD	--	HM	1	--	--
160A	3'-0"	6'-8"	1 3/4"	A	WD	--	HM	1	--	--
161A	3'-0"	6'-8"	1 3/4"	A	WD	--	HM	1	--	--
162A	3'-0"	6'-8"	1 3/4"	A	WD	--	HM	1	--	--
163A	3'-0"	6'-8"	1 3/4"	A	WD	--	HM	1	--	Door provided by owner-installed by qc
166A	3'-0"	6'-8"	1 3/4"	A	WD	--	HM	1	--	--
167A	3'-0"	6'-8"	1 3/8"	A	WD	TEMPERED	--	1	--	--
168A	3'-0"	6'-8"	1 3/8"	A	WD	--	WD	1	--	--
168B	2'-6"	6'-8"	1 3/8"	A	WD	--	WD	1	--	--
168C	2'-6"	6'-8"	1 3/8"	A	WD	--	WD	1	--	--
169A	3'-6"	6'-8"	1 3/4"	A	WD	--	HM	1	45 MIN	Door with closer
170A	3'-0"	6'-8"	1 3/4"	A	WD	--	HM	1	--	--
173A	5'-0"	8'-0"	1 3/4"		WD	TEMPERED	WD	2	--	Doors provided by owner-installed by qc fixed open
174A	3'-0"	6'-8"	1 3/4"	A	WD	--	--	1	20 MIN.	Door with closer
175A	3'-3"	8'-0"	1/2"		GL	TEMPERED	N/A	--	--	Born type slider

DOOR TYPES

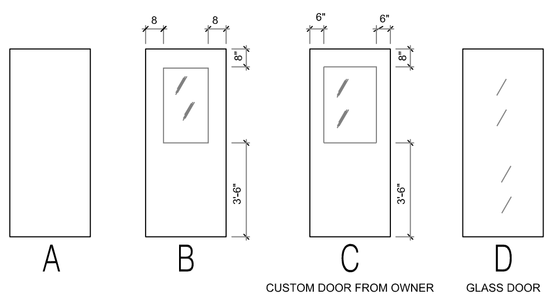

HOLLOW METAL FRAME ELEVATIONS

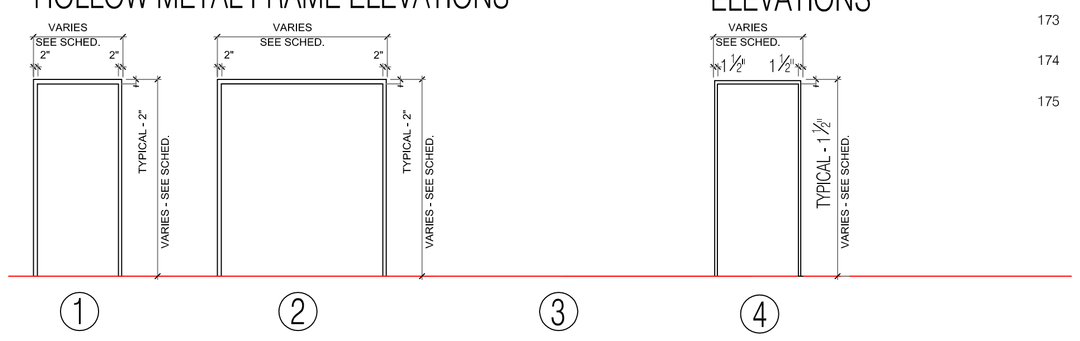

WOOD FRAME ELEVATIONS

GENERAL DOOR & FRAME NOTES

1. ALL DOORS SHALL BE LOCATED 3" OFF ADJACENT WALL (WALL TO FRAME) EXCEPT WHERE NOTES OR DIMENSIONS STATE OTHERWISE.
2. PROVIDE MIN. OF 20 GA. DOUBLE STUDS AT ALL DOOR JAMBS. REFER TO STRUCTURAL DRAWINGS FOR BUILT-UP COLUMN LOCATIONS.
3. ALL DOOR THICKNESS TO BE 1 3/4" UNLESS NOTED OTHERWISE.
4. ALL FLOOR MATERIAL TRANSITIONS SHALL OCCUR UNDER DOOR IN CLOSED POSITION.
5. HOLLOW METAL DOOR & FRAME DETAIL REFERENCES ARE LOCATED ON SHEETS
6. ALL GLASS IN DOORS AND SIDELIGHTS SHALL BE TEMPERED TO MEET CODE
7. ALL DOORS WITH FIRE RATING SHALL HAVE CLOSER HARDWARE & AND LABEL INDICATING FIRE RATING (LABEL SHALL NOT BE PAINTED)
8. REVIEW HARDWARE OPTIONS WITH OWNERS INCLUDING KEYING
9. REUSE EXISTING OWNER DOORS WHERE SHOWN
10. EXISTING DOORS TO BE REUSED ARE DOOR TYPE A
11. ALL DOORS SHALL HAVE LEVER TYPE HARDWARE MEETING ADA REQUIREMENTS.

INTERIOR FINISH SCHEDULE

ROOM NUMBER	ROOM NAME	FLOOR MATERIAL	FLOOR FINISH	WALLS MATERIAL/FINISH NORTH	WALLS EAST	WALLS SOUTH	WALLS WEST	CEILINGS MATERIAL	CEILINGS FINISH	BASEBOARD MATERIAL	BASEBOARD FINISH	CASEWORK MATERIAL	CASEWORK FINISH	COUNTER TOPS BACKSPLASH MATERIAL	COUNTER TOPS BACKSPLASH FINISH	NOTES
150	TREATMENT ROOM (DOUBLE)	VINYL PLANK	PRE-FINISHED	GYPSUM/PAINT B	GYPSUM/PAINT A	GYPSUM/PAINT A	GYPSUM/PAINT A	ACOUSTIC TILE		VINYL		BIRCH	CLEAR	GRANITE	SATIN	1,2
151	TREATMENT ROOM (DOUBLE)	VINYL PLANK	PRE-FINISHED	GYPSUM/PAINT B	GYPSUM/PAINT A	GYPSUM/PAINT A	GYPSUM/PAINT A	ACOUSTIC TILE		VINYL		BIRCH		GRANITE		1,2
152	TREATMENT ROOM (SINGLE)	VINYL PLANK	PRE-FINISHED	GYPSUM/PAINT A	GYPSUM/PAINT A	GYPSUM/PAINT B	GYPSUM/PAINT A	ACOUSTIC TILE		VINYL		BIRCH		GRANITE		1,2
153	TREATMENT ROOM (SINGLE)	VINYL PLANK	PRE-FINISHED	GYPSUM/PAINT B	GYPSUM/PAINT A	GYPSUM/PAINT A	GYPSUM/PAINT A	ACOUSTIC TILE		VINYL		BIRCH		GRANITE		
154	TREATMENT ROOM (SINGLE)	VINYL PLANK	PRE-FINISHED	GYPSUM/PAINT B	GYPSUM/PAINT A	GYPSUM/PAINT A	GYPSUM/PAINT A	ACOUSTIC TILE		VINYL		BIRCH		GRANITE		4
155	TREATMENT ROOM (SINGLE)	VINYL PLANK	PRE-FINISHED	GYPSUM/PAINT A	GYPSUM/PAINT A	GYPSUM/PAINT B	GYPSUM/PAINT A	ACOUSTIC TILE		VINYL		BIRCH		GRANITE		
156	CORRIDOR	CARPET PLANK	PRE-FINISHED	GYPSUM/PAINT C	GYPSUM/PAINT C	GYPSUM/PAINT C	GYPSUM/PAINT C	ACOUSTIC TILE		VINYL		BIRCH		GRANITE		ACCENT WALLS
157	STORAGE	CONCRETE	SEALED	GYPSUM/PAINT D	GYPSUM/PAINT D	GYPSUM/PAINT D	GYPSUM/PAINT D	ACOUSTIC TILE		VINYL		N/A		N/A		
158	TREATMENT ROOM (DOUBLE)	VINYL PLANK	PRE-FINISHED	GYPSUM/PAINT A	GYPSUM/PAINT B	GYPSUM/PAINT A	GYPSUM/PAINT A	ACOUSTIC TILE		VINYL		BIRCH		GRANITE		3, 4
159	TREATMENT ROOM (SINGLE)	VINYL PLANK	PRE-FINISHED	GYPSUM/PAINT A	GYPSUM/PAINT B	GYPSUM/PAINT A	GYPSUM/PAINT A	ACOUSTIC TILE		VINYL		BIRCH		GRANITE		1,2
160	WET TREATMENT ROOM	CERAMIC TILE	NON-SLIP	CERAMIC WALL TILE	CERAMIC WALL TILE	CERAMIC WALL TILE	CERAMIC WALL TILE	ACOUSTIC TILE	WATER PROOF	CERAMIC TILE		N/A		N/A		
161	MEN'S ROOM	CERAMIC TILE	NON-SLIP	GYPSUM/PAINT A	GYPSUM/PAINT A	GYPSUM/PAINT A	GYPSUM/PAINT A	GYPSUM	PAINT	CERAMIC TILE		N/A		N/A		
162	MEN'S LOCKER ROOM	VINYL PLANK	PRE-FINISHED	GYPSUM/PAINT A	HORZ. WOOD/CLEAR SHOWER ALCOVE CERAMIC WALL TILE	GYPSUM/PAINT A	GYPSUM/PAINT A	ACOUSTIC TILE		CERAMIC TILE/ WOOD	CLEAR	BIRCH LOCKERS		GRANITE		3, 4
163	CORRIDOR	CARPET PLANK	PRE-FINISHED	GYPSUM/PAINT C	GYPSUM/PAINT C	GYPSUM/PAINT C	GYPSUM/PAINT C			VINYL		N/A		N/A		
164	LOUNGE	CARPET PLANK	PRE-FINISHED	GYPSUM/PAINT E	HORZ. WOOD/CLEAR	GYPSUM/PAINT E	GYPSUM/PAINT E	ACOUSTIC TILE		VINYL		BIRCH		GRANITE		1,2
165	RAMP	CARPET PLANK	PRE-FINISHED	WOOD / GYPSUM PAINT F	GYPSUM PAINT F	WOOD / GYPSUM PAINT F	N/A	GYPSUM	PAINT	VINYL		N/A		N/A		
166	WOMEN'S LOCKER ROOM	VINYL PLANK	PRE-FINISHED	GYPSUM/PAINT G	GYPSUM/PAINT G	GYPSUM/PAINT G	HORZ. WOOD/CLEAR	GYPSUM	PAINT	VINYL		BIRCH LOCKERS		GRANITE		
167	SAUNA	RAISED WOOD (KIT)	NON-SLIP	POPLAR KIT	POPLAR KIT	POPLAR KIT	POPLAR KIT	POPLAR KIT	NONE	POPLAR KIT	NONE	CEDAR BENCHES		N/A		
168	SHOWER ROOM	CERAMIC TILE	NON-SLIP	CERAMIC WALL TILE	HORZ. WOOD/CLEAR	HORZ. WOOD/CLEAR	CERAMIC WALL TILE	GYPSUM	PAINT	CERAMIC TILE/ WOOD	CLEAR	N/A		N/A		3, 4
169	STAFF/LAUNDRY	CONCRETE	SEALED	GYPSUM/PAINT D	GYPSUM/PAINT D	GYPSUM/PAINT D	GYPSUM/PAINT D	GYPSUM	PAINT	VINYL		N/A		N/A		
170	BATHROOM	CONCRETE	SEALED	GYPSUM/PAINT D	GYPSUM/PAINT D	GYPSUM/PAINT D	GYPSUM/PAINT D	GYPSUM	PAINT	VINYL		N/A		N/A		
171	OFFICE	VINYL PLANK	PRE-FINISHED	GYPSUM/PAINT C	GYPSUM/PAINT C / GLASS	GYPSUM/PAINT C / GLASS	GYPSUM/PAINT C	ACOUSTIC TILE		VINYL		BIRCH FACE SHELVES		N/A		
172	RECEPTION	VINYL PLANK, TILE	PRE-FINISHED	GYPSUM/PAINT C	GYPSUM/PAINT C	GYPSUM/PAINT C	GYPSUM/PAINT C	ACOUSTIC TILE		VINYL		BIRCH		GRANITE		1,2
173	SALON	VINYL PLANK	PRE-FINISHED	GYPSUM/PAINT C	GYPSUM/PAINT C	GYPSUM/PAINT C	GYPSUM/PAINT C	ACOUSTIC TILE		VINYL		BIRCH		GRANITE		1,2
174	CLOSET	CONCRETE	SEALED	GYPSUM/PAINT D	GYPSUM/PAINT D	GYPSUM/PAINT D	GYPSUM/PAINT D	ACOUSTIC TILE		VINYL		N/A		N/A		
175	OFFICE	VNYL PLANK	PRE-FINSIHED	GYPSUM-PAINT C	GYPSUM/PAINT C/ GLASS	GYPSUM/PAINT C/ GLASS	GYPSUM/PAINT C/ GLASS	ACOUSTIC TILE		VINYL		BIRCH		N/A		

GENERAL INTERIOR FINISH NOTES:
A. REFER TO INTERIOR FINISH SCHEDULE AND SPECIFICATIONS FOR MATERIALS AND COLORS.
B. REFER TO ELEVATIONS FOR EXTENT OF FINISHES.
DISCREPANCIES BETWEEN ROOM FINISH SCHEDULE AND ELEVATIONS SHALL BE BROUGHT TO THE ARCHITECTS ATTENTION PRIOR TO COMMENCEMENT OF WORK.3. PAINTING ABOVE CEILINGS IS NOT REQUIRED.
C. PROVIDE FIBERGLASS REINFORCED PANELS 4' HIGH BEHIND MOP SINK.
D. REFER TO REFLECTED CEILING PLAN FOR EXTENT OF CEILING TILES
E. ALL WINDOW RETURNS SHALL BE GYPSUM, EXCEPT INTERIOR WINDOW SILLS SHALL BE PAINTED POPLAR.

1. WINDOWS SHALL HAVE TRANSLUCENT FILM APPLIED ON THE INSIDE.
2. WINDOWS SHALL HAVE SOLID BLOCKING FOR FULL LENGTH ROD AND DRAPES.
3. ADA SHOWER AND TOILET SHALL MEET THE LATEST ADA STANDARDS AND THE STATE OF MAINE STANDARDS.
4. PROVIDE BLOCKING FOR CURTAIN RODS AT SHOWER VESTIBULES.

PROSPECT DESIGN
58 FORE ST. PORTLAND, ME
www.prospectdesign.me
T: 207 - 749 - 7400

NINE STONES TENANT FIT-OUT
185 FORE STREET
BATEMAN PARTNERS, LLC

PERMIT

SHEET TITLE
SCHEDULES

REVISION

DRAWN BY:

DATE:
January 15, 2016

A 4