

wp2

# VSCL

## Venere® — Large Contemporary

WALL SCONCES



### FEATURES

- Integral secondary source to provide illumination to path of egress
- One-piece memory retentive silicone gasket seals out contaminants.
- Six optical configurations available. Configurable as an uplight, downlight, or uplight/downlight.
- Available with full cutoff option
- Available with a wide variety of fascia options
- EISA compliant
- IP65 rated
- Powder coat finish in our 13 standard colors with a polymer primer sealer

### ORDERING INFORMATION

VSCL - [ ] - [ ] - [ ] - [ ]

MODEL	
VSCL-DB	Down beam and egress.
VSCL-DS	Down spread and egress. Available only with MHT6EB.
VSCL-UB	Up beam and egress.
VSCL-US	Up spread and egress. Available only with MHT6EB.
VSCL-DBUS	Down beam/up spread and egress. Available only with MHT6EB.
VSCL-UBDS	Up beam/down spread and egress. Available only with MHT6EB.

LAMP/BALLAST	
39MHT6EB	39 watt electronic metal halide 120 thru 277 volt ballast. Use G12 base, T-6 ceramic lamp.
70MHT6EB	70 watt electronic metal halide 120 thru 277 volt ballast. Use G12 base, T-6 ceramic lamp.
35R111EB	35 watt electronic metal halide R111, 120 thru 277 volt ballast.
70R111EB	70 watt electronic metal halide R111, 120 thru 277 volt ballast.
50PLL	50 watt PL-L compact fluorescent ballast, 120 thru 277 volt ballast. Use 4-pin, 50 watt lamp.

DECORATIVE FASCIA OPTIONS	
SSRW	With stainless steel rods. No screen.
SSWD	Stainless steel rods with wide slot screen
SSNW	Stainless steel rods with narrow slot screen
SSPF	Stainless steel rods with perforated screen
SSCS	Stainless steel rods with custom screen*

\* Contact factory for custom designs

OPTIONS	
FCO	Full cutoff shield. Available with DB or DS.
NEG	No egress lamp (blocked opening)
SSP	Decorative fascia screen in stainless steel

COLORS	
AWT	Arctic White
BLK	Black
MTB	Matte Black
DGN	Dark Green
DBZ	Dark Bronze
WRZ	Weathered Bronze
BRM	Metallic Bronze
VBL	Verde Blue
CRT	Corten
MAL	Matte Aluminum
MDG	Medium Grey
ATG	Antique Green
LGY	Light Grey
RAL/ PREMIUM COLOR	Provide a RAL 4 digit color number
CUSTOM COLOR	Please provide a color chip for matching

Corten Aluminum



SSWD



SSNW




SSPF



SSCS

### DIMENSIONS

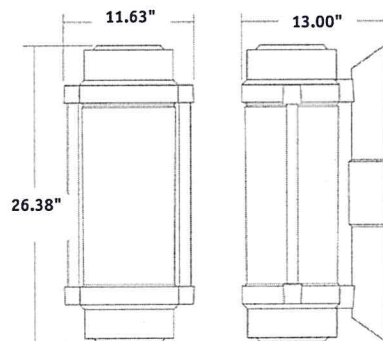

VSCL

VSCL  
Wt: 29 lbs