


SCOPE OF WORK:

DEMOLITION:

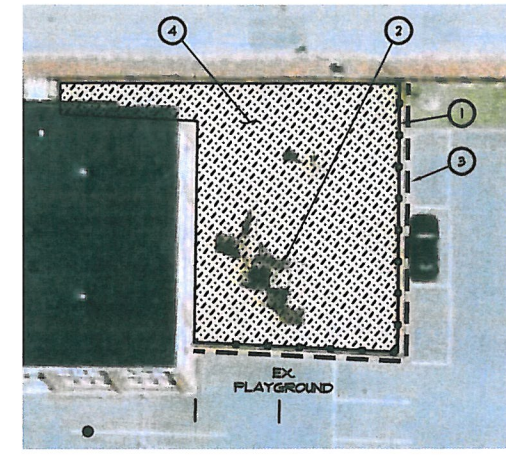


- ① REMOVE FENCE, 110 LF.±
- ② REMOVE PLAYGROUND EQUIPMENT.
- ③ REMOVE BITUMINOUS CURB AROUND THE PLAYGROUND, 110'±.
- ④ EXCAVATE MIX OF WOODCHIPS & SOIL, 3,000 SF.±

NOTES:
 SALVAGE FENCE AND PLAY EQUIPMENT TO OWNER.
 CURB AND SURFACE MATERIAL TO BE PROPERLY DISPOSED OF BY CONTRACTOR.


NEW CONSTRUCTION:

- Ⓐ INSTALL GRAVEL AND PAVING IN EXISTING PLAYGROUND AREA, 920 SF.±
- Ⓑ LOAM AND SEED PLAYGROUND AREA AND AREA ALONG LOCUST STREET, 2,226 SF.±
- Ⓒ SEAL COAT PARKING LOT & STRIPE NEW SPACES.
- Ⓓ INSTALL 4-BOLLARDS TO DEFINE DRIVE AISLE & CLARIFY SEPERATION BETWEEN PARKING LOTS.

NOTES:
 STRIPES TO BE 4" WIDE YELLOW PAINT.
 LOT TO BE SWEEPED AND CLEAN PRIOR TO SEAL COATING.
 4" DEEP LOAM MIN. SEED WITH LAWN MIX.
 OWNER TO BE RESPONSIBLE FOR WATERING SEEDED AREA.

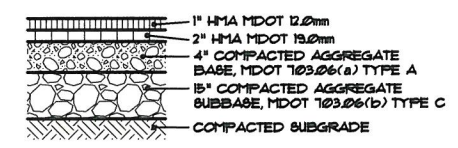

PAVEMENT SECTION
 NOT TO SCALE

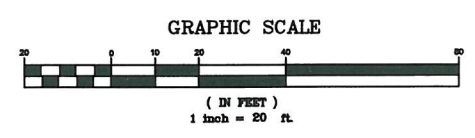

| | | |
|--|-------------------|--------------------------------|
| 2 | 3/6/14 | REV'D PER FIRE CHIEF COMMENTS |
| 1 | 1/16/14 | ADDED DOORS & AISLE DIMENSIONS |
| REV. | DATE | DESCRIPTION |
| | | |
| ROMAN CATHOLIC BISHOP OF PORTLAND 510 OCEAN AVE, PORTLAND ME 04103 CATHEDRAL OF THE IMMACULATE CONCEPTION 307 CONGRESS STREET, PORTLAND | | |
| PARKING LAYOUT PLAN | | |
| SCALE: | AS SHOWN | DRN BY: JDC |
| DATE: | DECEMBER 26, 2013 | DESG BY: TSG |
| PROJECT: | 11158 | CHK BY: |