



UL, ULC, CSFM Listed; FM Approved;
MEA (NYC) Acceptance*

TrueAlarm® Analog Sensing

TrueAlarm Analog Sensors – Photoelectric,
Ionization, and Heat; Standard Bases and Accessories

Features

TrueAlarm® analog sensing provides:

- Digital transmission of analog sensor values via IDNet™ or MAPNET II® two-wire communications**

For use with the following Simplex® products:

- 4010 and 4100U Series control panels; and 4008 Series control panels with reduced feature set (refer to data sheet S4008-0001 for details)
- 4020, 4100, and 4120 Series control panels, Universal Transponders and 2120 TrueAlarm CDTs equipped for MAPNET II operation

Fire alarm control panel provides:

- Peak value logging allowing accurate analysis of each sensor for individual sensitivity selection
- Sensitivity monitoring satisfying NFPA 72® sensitivity testing requirements; automatic individual sensor calibration check verifies sensor integrity
- Automatic environmental compensation, multi-stage alarm operation, and display of sensitivity directly in percent per foot
- Ability to display and print detailed sensor information in plain English language

Photoelectric smoke sensors provide:

- Seven levels of sensitivity from 0.2% to 3.7%

Heat sensors provide:

- Fixed temperature sensing
- Rate-of-rise temperature sensing
- Utility temperature sensing

Ionization smoke sensors provide:

- Three levels of sensitivity; 0.5%, 0.9%, and 1.3%


General features:

- UL listed to Standard 268
- Louvered smoke sensor design enhances smoke capture by directing flow to chamber; entrance areas are minimally visible when ceiling mounted
- Designed for EMI compatibility
- Magnetic test feature is provided
- Optional accessories include remote LED alarm indicator and output relays

Additional base reference:

- For isolator bases, refer to data sheet S4098-0025
- For sounder bases, refer to data sheet S4098-0028
- For photo/heat sensors, refer to data sheet S4098-0024 (single address) and S4098-0033 (dual address)

* These products have been approved by the California State Fire Marshal (CSFM) pursuant to Section 13144.1 of the California Health and Safety Code. See CSFM Listings 7272-0026:218, 7271-0026:231, 7270-0026:216, and 7300-0026:217 for allowable values and/or conditions concerning material presented in this document. It is subject to re-examination, revision, and possible cancellation. Accepted for use – City of New York Department of Buildings – MEA35-93E. Additional listings may be applicable, contact your local Simplex product supplier for the latest status. Listings and approvals under Simplex Time Recorder Co. are the property of Tyco Safety Products Westminster.

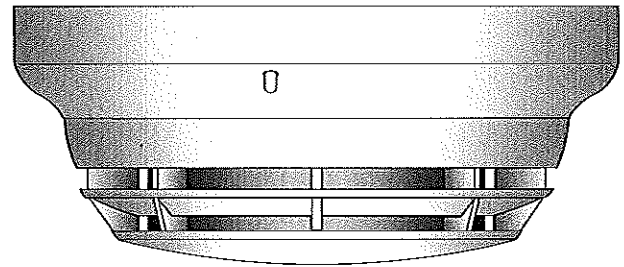

4098-9714 TrueAlarm Photoelectric
Sensor Mounted in Base

Description

Digital Communication of Analog Sensing.

TrueAlarm analog sensors provide an analog measurement digitally communicated to the host control panel using Simplex addressable communications. At the control panel, the data is analyzed and an average value is determined and stored. An alarm or other abnormal condition is determined by comparing the sensor's present value against its average value and time.

Intelligent Data Evaluation. Monitoring each sensor's average value provides a continuously shifting reference point. This software filtering process compensates for environmental factors (dust, dirt, etc.) and component aging, providing an accurate reference for evaluating new activity. With this filtering, there is a significant reduction in the probability of false or nuisance alarms caused by shifts in sensitivity, either up or down.

Control Panel Selection. Peak activity per sensor is stored to assist in evaluating specific locations. The alarm set point for each TrueAlarm sensor is determined at the host control panel, selectable as more or less sensitive as the individual application requires.

Timed/Multi-Stage Selection. Sensor alarm set points can be programmed for timed automatic sensitivity selection (such as more sensitive at night, less sensitive during day). Control panel programming can also provide multi-stage operation per sensor. For example, a 0.2% level may cause a warning to prompt investigation while a 2.5% level may initiate an alarm.

Sensor Alarm and Trouble LED Indication. Each sensor base's LED pulses to indicate communications with the panel. If the control panel determines a sensor is in alarm, or is dirty or has some other type of trouble, the details are announced at the control panel and that sensor base's LED will be turned on steadily. During a system alarm, the control panel will control the LEDs such that an LED indicating a trouble will return to pulsing to help identify the alarmed sensors.

** TrueAlarm analog sensors are protected by one or more of the following U.S. Patents: 5,155,468; 5,173,683; 5,400,014; 5,543,777; 5,710,541; D383,407; D388,352; D392,573. MAPNET II and IDNet addressable communications designs are protected by U.S. Patent No. 4,796,025.

TrueAlarm Sensor Bases and Accessories

Sensor Base Features

Base mounted address selection:

- Address remains with its programmed location
- Accessible from front (DIP switch under sensor)

General features:

- Automatic identification provides default sensitivity when substituting sensor types
- Integral red LED for power-on (pulsing), or alarm or trouble (steady on)
- Locking anti-tamper design mounts on standard outlet box
- Magnetically operated functional test

Sensor Bases

4098-9792, Standard sensor base

4098-9789, Sensor base with wired connections for:

- 2098-9808 Remote LED alarm indicator or 4098-9822 relay (unsupervised)

4098-9791, Sensor base with supervised relay driver output (not compatible with 2120 CDT):

- Relay operation is programmable and can be manually operated from control panel
- Use with remote mount 2098-9737 relay
- Also includes wired connections for remote LED alarm indicator or 4098-9822 relay

Sensor Base Options

2098-9737, Remote or local mount supervised relay:

- DPDT contacts for resistive/suppressed loads, power limited rating of 3 A @ 28 VDC; non-power limited rating of 3 A @ 120 VAC (requires external 24 VDC coil power)

4098-9822, LED Annunciation Relay:


- Activates when base LED is on steady, indicating local alarm or trouble
- DPDT contacts for resistive/suppressed loads, power limited rating of 2 A @ 28 VDC; non-power limited rating of 1/2 A @ 120 VAC, (requires external 24 VDC coil power)

4098-9832, Adapter plate:

- Required for surface or semi-flush mounting to 4" square electrical box and for surface mounting to 4" octagonal box
- Can be used for cosmetic retrofitting to existing 6-3/8" diameter base product

2098-9808, Remote red LED Alarm Indicator:

- Mounts on single gang box (shown in illustration to right)



Description

TrueAlarm sensor bases contain integral addressable electronics that constantly monitor the status of the detachable photoelectric, ionization, or heat sensors. Each sensor's output is digitized and transmitted to the system fire alarm control panel every four seconds.


Since TrueAlarm sensors use the same base, different sensor types can be easily interchanged to meet specific location requirements. This feature also allows intentional sensor substitution during building construction. When conditions are temporarily dusty, instead of covering the smoke sensors (causing them to be disabled), heat sensors may be installed without reprogramming the control panel. Although the control panel will indicate an incorrect sensor type, the heat sensor will operate at a default sensitivity providing heat detection for building protection at that location.

Mounting Reference


Electrical Box Requirements: (boxes are by others)

Without relay: 4" octagonal or 4" square, 1-1/2" deep; single gang, 2" deep

With relay: 4" octagonal or 4" square, 1-1/2" deep, with 1-1/2" extension ring

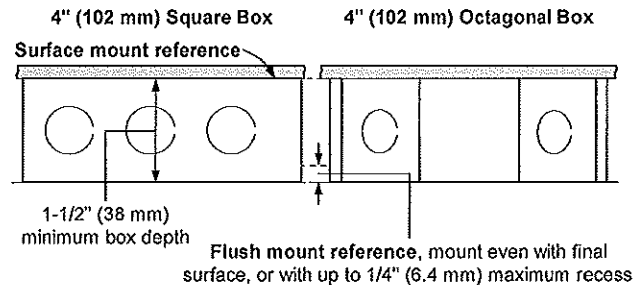


2098-9737 Relay (mounts in base electrical box or remotely) 4098-9822 Relay (mounts in base electrical box)



Relay Size: 2-1/2" X 1-1/2" X 1" (3.75 cubic inches)
(64 mm X 38 mm X 25.4 mm)

NOTE: Review total wire count, wire size, and accessories being wired to determine required box volume.

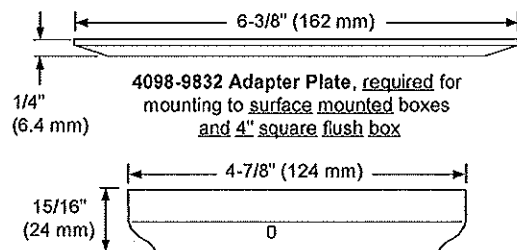

TrueAlarm Bases
4098-9789, -9791, & -9792

TrueAlarm Sensors

Features

Sealed against rear air flow entry

Interchangeable mounting

EMI/RFI shielded electronics

Heat sensors:

- Selectable rate compensated, fixed temperature sensing with or without rate-of-rise operation
- Rated spacing distance between sensors:

Fixed Temp. Setting	UL & ULC Spacing	FM Spacing, Either Fixed Temperature Setting
135° F (57.2° C)	60 ft x 60 ft (18.3 m)	20 ft x 20 ft (6.1 m) for fixed temperature only; RTI = Quick
155° F (68° C)	40 ft x 40 ft (12.2 m)	50 ft x 50 ft (15.2 m) for fixed temperature with either rate-of-rise selection; RTI = Ultra Fast

Smoke Sensors:


- Photoelectric or ionization technology sensing
- 360° smoke entry for optimum response
- Built-in insect screens

4098-9733 Heat Sensor

TrueAlarm heat sensors are self-restoring and provide rate compensated, fixed temperature sensing, selectable with or without rate-of-rise temperature sensing. Due to its small thermal mass, the sensor accurately and quickly measures the local temperature for analysis at the fire alarm control panel.

Rate-of-rise temperature detection is selectable at the control panel for either 15° F (8.3° C) or 20° F (11.1° C) per minute. Fixed temperature sensing is independent of rate-of-rise sensing and programmable to operate at 135° F (57.2° C) or 155° F (68° C). In a slow developing fire, the temperature may not increase rapidly enough to operate the rate-of-rise feature. However, an alarm will be initiated when the temperature reaches its rated fixed temperature setting.

TrueAlarm heat sensors can be programmed as a utility device to monitor for temperature extremes in the range from 32° F to 155° F (0° C to 68° C). This feature can provide freeze warnings or alert to HVAC system problems. *Refer to specific panels for availability.*

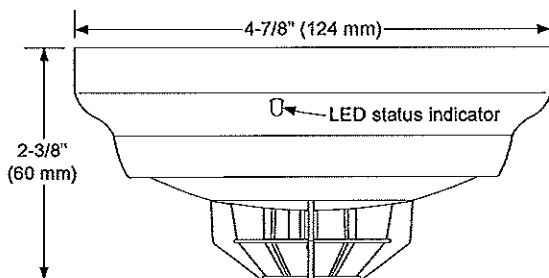


4098-9733 Heat Sensor with Base

WARNING: In most fires, hazardous levels of smoke and toxic gas can build up before a heat detection device would initiate an alarm. In cases where Life Safety is a factor, the use of smoke detection is highly recommended.

4098-9714 Photoelectric Sensor

TrueAlarm photoelectric sensors use a stable, pulsed infrared LED light source and a silicon photodiode receiver to provide consistent and accurate low power smoke sensing. Seven levels of sensitivity are available for each individual sensor, ranging from 0.2% to 3.7% per foot of smoke obscuration. Sensitivity is selected and monitored at the fire alarm control panel.

The sensor head design provides 360° smoke entry for optimum response to smoke from any direction. Due to its photoelectric operation, air velocity is not normally a factor, except for impact on area smoke flow.

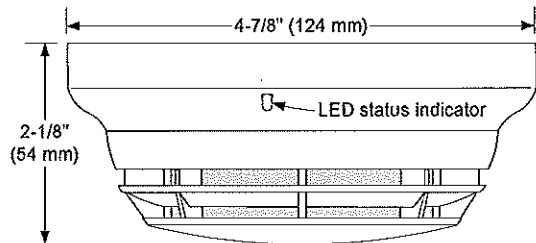


4098-9714 Photoelectric Sensor with Base

4098-9717 Ionization Sensor

TrueAlarm Ionization sensors use a single radioactive source with an outer sampling ionization chamber and an inner reference ionization chamber to provide stable operation under fluctuations in environmental conditions such as temperature and humidity. Smoke and invisible combustion gases can freely penetrate the outer chamber. With both chambers ionized by a small radioactive source [Am 241 (Americium)], a very small current flows in the circuit. The presence of particles of combustion will cause a change in the voltage ratio between chambers. This difference is measured by the electronics in the sensor base and digitally transmitted back to the control panel for processing.

Three levels of sensitivity are available for each ionization sensor: 0.5, 0.9, and 1.3% per foot of smoke obscuration.

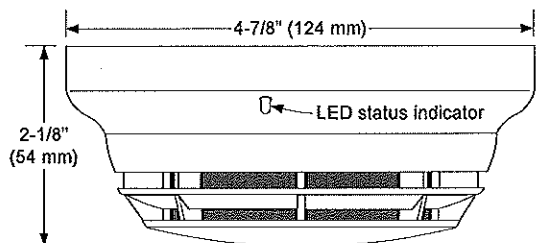

4098-9717 Ionization Sensor with Base

Application Reference

Sensor locations should be determined only after careful consideration of the physical layout and contents of the area to be protected. Refer to NFPA 72, the *National Fire Alarm Code*[®]. On smooth ceilings, smoke sensor spacing of 30 ft (9.1 m) may be used as a guide. For detailed application information, refer to *4098 Detectors, Sensors, and Bases Application Manual* (574-709).

TrueAlarm Analog Sensing Product Selection Chart

TrueAlarm Sensor Bases*

Model	Description	Compatibility	Mounting Requirements
4098-9792	Standard Sensor Base, no options	Sensors 4098-9714, -9733, & -9717	4" octagonal or 4" square box, 1-1/2" min. depth; or single gang box, 2" min. depth
4098-9789	Sensor Base with connections for Remote LED Alarm Indicator or Unsupervised Relay	Sensors 4098-9714, -9733, & -9717 2098-9808 remote LED alarm indicator or 4098-9822 relay	4" octagonal or 4" square box
4098-9791	Sensor Base with connections for Supervised Remote Relay and connections for Remote Alarm Indicator or Unsupervised Relay	Sensors 4098-9714, -9733, & -9717 2098-9737 remote relay (supervised) 2098-9808 remote alarm indicator or 4098-9822 relay (unsupervised)	Note: Box depth requirements depend on total wire count and wire size, refer to accessories list below for reference.

TrueAlarm Sensors

Model	Description	Compatibility	Mounting Requirements
4098-9714	Photoelectric Smoke Sensor	Bases 4098-9792, 4098-9789, and 4098-9791	Refer to base requirements
4098-9717	Ionization Smoke Sensor		
4098-9733	Heat Sensor		

TrueAlarm Sensor/Base Accessories

Model	Description	Compatibility	Mounting Requirements
2098-9737	Supervised Relay, mounts remote or in base electrical box	For use with 4098-9791 base	Remote Mounting requires 4" octagonal or 4" square box, 1-1/2" minimum depth Base Mounting requires 4" octagonal box, 2-1/8" deep with 1-1/2" extension ring
2098-9808	Remote Red LED Alarm Indicator on single gang stainless steel plate	Bases 4098-9789 and 4098-9791	Single gang box, 1-1/2" minimum depth
4098-9822	Relay, tracks base LED status (unsupervised, mounts only in base electrical box)		4" octagonal box, 2-1/8" deep with 1-1/2" extension ring
4098-9832	Adapter Plate	Bases 4098-9792, -9789, & -9791	Required for surface or semi-flush mounted 4" square box and for surface mounted 4" octagonal box

* Refer to Installation Instructions 574-707 and Application Manual 574-709 for additional information.

Specifications

General Operating Specifications

Communications and Sensor Supervisory Power	MAPNET II or IDNet, auto-select, 24-40 VDC w/data, 400 μ A typical, 1 address per base	
Communications Connections	Screw terminals for in/out wiring, 18 to 14 AWG (0.82 mm ² to 2.08 mm ²)	
Remote LED Alarm Indicator Current	1 mA typical, no impact to alarm current	
Remote LED Alarm Indicator and Relay Connections	Color coded wire leads, 18 AWG (0.82 mm ²)	
UL Listed Temperature Range	32° to 100° F (0° to 38° C)	
Operating Temperature Range	with 4098-9717 or 4098-9733	32° to 122° F (0° to 50° C)
	with 4098-9714	15° to 122° F (-9° to 50° C)
Humidity Range	10 to 95% RH	
Smoke Sensor Ambient Ratings	4098-9714, Photoelectric Sensor	Air velocity = 0-2000 ft/min (0-610 m/min)
	4098-9717, Ionization Sensor	Air velocity = 0-200 ft/min (0-61 m/min); Altitude is up to 8000 ft (2.4 km)
Housing Color	Frost White	
4098-9791 Base With Supervised Remote Relay 2098-9737 (see page 2 for contact ratings)		
Externally Supplied Relay Coil Voltage	18-32 VDC (nominal 24 VDC)	
Supervisory Current	270 μ A, from 24 VDC supply	
Alarm Current with 2098-9737 Relay	28 mA, from 24 VDC supply	
4098-9822 Unsupervised Relay, Requirements for Bases 4098-9789 and 4098-9791 (see page 2 for contact ratings)		
Externally Supplied Relay Coil Voltage	18-32 VDC (nominal 24 VDC)	
Supervisory Current	Supplied from communications	
Alarm Current	13 mA from separate 24 VDC supply	

Tyco is a registered trademark of Tyco International Services GMBH and is used under license. Simplex, the Simplex logo, TrueAlarm, IDNet, and MAPNET II are trademarks of Tyco International Ltd. and its affiliates and are used under license. NFPA 72 and National Fire Alarm Code are registered trademarks of the National Fire Protection Association (NFPA).



Tyco Safety Products Westminister • Westminister, MA • 01441-0001 • USA

S4098-0019-12 8/2008

www.tycosafetyproducts-usa-wm.com

© 2008 Tyco Safety Products Westminister. All rights reserved. All specifications and other information shown were current as of document revision date and are subject to change without notice.