OCCUPANT LOAD AND EXITING

			LOAD		
DCCUPANT LOAD	SF		FACTOR		occ
	ortona var de e manços que de meitro, con arade se				
FIRST FLOOR:				<u> </u>	
SALES FLOOR AREA:	6,341	1	30	=	212
(OCCUPANT LOAD FACTOR		ļ. 		ļļ.	**************************************
PER TABLE 1004.1.1)	наалания интернятивной к				waanaanaanaan afaan afaan s
STOCKROOM / MISC AREA:	998	1	300	- 	••••••••••••••••••••••••••••••••••••••
(OCCUPANT LOAD FACTOR	aagaman mijapadooi.	enis me	-xeginiquaninan aaaanon]	*drantine	terminani i ministrasso de ju primi internit i di fatti
PER TABLE 1004.1.1)					
MANAGER'S OFFICE:	76	7	100		
(OCCUPANT LOAD FACTOR		***************************************			•
PER TABLE 1004.1.1)					
TOTAL FIRST FLOOR:	7,339			20000	216
BASEMENT:	2,869	7	300	=	10
STOCKROOM / MISC AREA:			·	l	•••••••••••••••••••••••••••••••••••••••
(OCCUPANT LOAD FACTOR					
PER TABLE 1004.1.1)	orthography of the delegants				
			·		
TOTAL BASEMENT:	2,869				10
			in the same of the	- coloniality -	
TOTAL:	10,208				226
REQUIRED RESTROOMS PER OCCUPANCY					1 PER SEX
PROVIDED RESTROOMS			-		1 PER SEX

Required:

43.2"

Required:

250 FT MAX

3. THE CONTRACT DOCUMENTS ARE COMPLEMENTARY AND WHAT IS REQUIRED BY ONE

4. DIMENSIONS ARE TO THE STRUCTURAL GRID OR TO FINISH SURFACES, UON

OPENINGS SHALL BE CENTERED BETWEEN ADJACENT WALL INTERSECTIONS

7. COORDINATE ALL WORK WITH FACILITY RULES AND REGULATIONS

5. DOORS AND CASED OPENINGS INDICATED NEARBY WALL INTERSECTIONS, SHALL BE

SHALL BE AS BINDING AS IF REQUIRED BY ALL. THE CONTRACTOR SHALL COORDINATE

ALL PORTIONS OF THE WORK AS DESCRIBED IN THE CONTRACT DOCUMENTS. NOTIFY

LOCATED SO THAT THE EDGE OF THE FINISH OPENING IS SIX INCHES FROM THE FACE

OF THE NEARBY WALL UNLESS OTHERWISE INDICATED. ALL OTHER DOORS AND CASED

6. COORDINATE ALL WORK AFFECTING THE EXTERIOR OR BUILDING SYSTEM WITH OWNERS

8. ITEMS INDICATED AS BIDDER DESIGNED SHALL BE DESIGNED AND ENGINEERED BY THE

REQUIREMENTS, INCLUDING COMPREHENSIVE ENGINEERING ANALYSIS BY A QUALIFIED PROFESSIONAL ENGINEER, USING PERFORMANCE AND DESIGN CRITERIA INDICATED.

CONTRACTOR AND/OR SUBCONTRACTOR IN COMPLIANCE WITH APPLICABLE LEGAL

THE ARCHITECT OF ALL DISCREPANCIES PRIOR TO CONSTRUCTION FOR RESOLUTION

Provided:

66"

Provided:

160'-3" FT MAX

171"

EXITING

NUMBER OF EXITS

MAX TRAVEL DISTANCE:

GENERAL NOTES

1. DO NOT SCALE THE DRAWINGS

FIRST FLOOR

Exit width

Exit width

BASEMENT

TRAVEL DISTANCE

APPLICABLE CODES

BUILDING CODE:	INTERNATIONAL BUILDING CODE (IBC)	2009
ELECTRICAL CODE:	NATIONAL ELECTRICAL CODE (NFPA 70)	2009
MECHANICAL CODE:	INTERNATIONAL MECHANICAL CODE (IMC)	2009
PLUMBING CODE:	UNIFORM PLUMBING CODE (UPC)	2009
ENERGY CODE:	INTERNATIONAL ENERGY CONSERVATION CODE	2009
FUEL GAS CODE:	NFPA 54	2009
FIRE CODE:	NFPA 72	2009
ACCESSIBILITY CODE:	ICC A117.1-2003	2010
CONSTRUCTION TYPE:	III-A	
USE GROUP:	M - MERCANTILE	
FIRE SUPPRESSION:	FULL SPRINKLER	
SEISMIC DESIGN CATEGO	DRY: B	
NUMBER OF BUILDING:	1	
NUMBER OF STORIES:	2	
PRESENT OCCUPANCY:	ASSEMBLY (A-2)	

TENANT IMPROVEMENT CONSISTING OF NEW BUILD-OUT OF A LEASED SPACE IN AN

EXISTING 2-STORY BUILDING. WORK INCLUDES NEW NON-STRUCTURAL PARTITIONS,

ACCESSIBLE LIFT, STAIR, RSMPD, CEILINGS, FINISHES, MECHANICAL, ELECTRICAL AND

FIRE SPRINKLER SYSTEM IS TO BE MODIFIED AS REQUIRED FOR NEW TENANT SPACE.

SPRINKLER SYSTEM MODIFICATIONS WILL BE BIDDER DESIGNED UNDER SEPARATE PERMIT.

STOCK SHELVING SYSTEM AND STRUCTURAL CALCULATIONS ARE UNDER BIDDER DESIGNED


SIGNAGE SHOWN IS FOR INFORMATION ONLY. SIGNAGE WILL BE UNDER BIDDER DESIGNED

RCP GENERAL NOTES

1. ALL CEILING HEIGHTS INDICATED ARE FROM FINISH FLOOR TO FINISH CEILING

- 2. ALL DIMENSIONS ARE FROM FACE OF FINISH TO FACE OF FINISH, UON
- REFER TO ELECTRICAL DRAWINGS FOR EXACT NUMBER AND TYPE OF LIGHT
- FIXTURES TO BE PROVIDED. NOTIFY ARCHITECT OF ANY DISCREPANCIES COORDINATE CEILINGS WITH MECHANICAL. SEE MECHANICAL PLAN FOR
- LOCATIONS OF ALL DIFFUSERS, DUCTS, RETURN AIR GRILLES, SPRINKLERS AND ANY ADDITIONAL MECHANICAL EQUIPMENT SPRINKLER HEADS:
- A.) IN GYPSUM BOARD CEILINGS SPRINKLER HEADS TO BE FLUSH CONCEALED TYPE WITH COVERS B.) PROVIDE SPRINKLER LAYOUT. QUANTITY OF HEADS AS REQUIRED BY LANDLORD'S INSURANCE AND BY CODE
- 6. VERIFY SPEAKER QUANTITIES AND LOCATIONS WITH SOUND SYSTEM
- ACCESS MECHANICAL AND ELECTRICAL EQUIPMENT CONCEALED BY GWB THROUGH MECHANICAL DIFFUSERS. WHERE ADDITIONAL ACCESS IS REQUIRED, PROVIDE ACCESS PANEL FLUSH WITH TAPED EDGES
- 8. FINISH ALL CEILING REGISTERS, GRILLES AND SPEAKER COVERS TO MATCH SALES AREA CEILING

VICINITY MAP

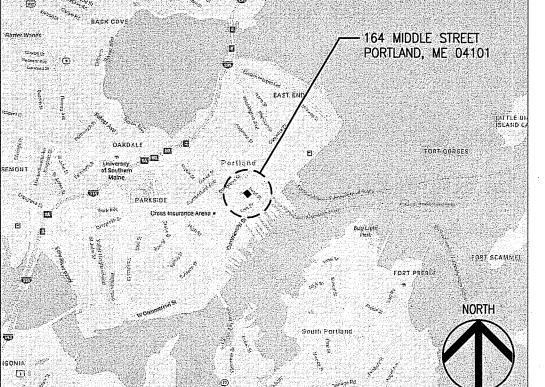

EEA CONSULTING ENGINEERS

STRUCTURAL ENGINEER: DCI ENGINEERS, INC. 818 STEWART STREET, SUITE 1000 SEATTLE, WA 98101

GENERAL CONTRACTOR:

DRAWING INDEX PROJECT DIRECTORY

NO. SHEET NAME

A-000.2 | EGRESS PLANS

A-000 GENERAL INFORMATION

A-001 SYMBOLS & ABBREVIATIONS

A-002 FINISH SCHEDULE, FINISH & MATERIAL LEGEND

A-010 TEMPORARY STORE OPENING GRAPHICS

A-110 OVERALL FIRST FLOOR/ FINISH PLAN

A-111 PARTIAL FIRST FLOOR PLAN - EAST

A-112 PARTIAL FIRST FLOOR PLAN - WEST

A-120 OVERALL BASEMENT FLOOR/ FINISH PLAN

A-130 OVERALL FIRST FLOOR REFLECTED CEILING PLAN

A-140 OVERALL BASEMENT REFLECTED CEILING PLAN

A-201 EXTERIOR ELEVATION

A-511 SIGNAGE DETAILS

A-701 INTERIOR ELEVATIONS

A-702 INTERIOR ELEVATIONS

A-703 INTERIOR ELEVATIONS

A-704 INTERIOR ELEVATIONS

A-802 | WALL DETAILS

A-803 INTERIOR DETAILS

A-804 INTERIOR DETAILS

A-805 INTERIOR DETAILS

A-806 INTERIOR DETAILS

A-901 | SPECIFICATIONS

A-902 | SPECIFICATIONS

A-903 | SPECIFICATIONS

A-904 | SPECIFICATIONS

A-905 | SPECIFICATIONS

A-906 | SPECIFICATIONS

F-110 OVERALL FIRST FLOOR FIXTURE PLAN

STRUCTURAL

F-120 OVERALL BASEMENT FIXTURE PLAN

F-200 MERCHANDISE BREAKDOWN

S-101 | STRUCTURAL GENERAL NOTES

S-102 | STRUCTURAL GENERAL NOTES

ABBREVIATIONS

S-301 STRUCTURAL DETAILS

S-103 STRUCTURAL GENERAL NOTES, LEGEND AND

S-204 STRUCTURAL FIRST FLOOR REFLECTED CEILING PLAN

S-201 | STRUCTURAL BASEMENT FLOOR PLAN

S-203 | STRUCTURAL FIRST FLOOR PLAN

F-210 PATH OF GOODS PLAN

A-801 WALL TYPES & PARTITION TYPES

A-210 ENLARGED EXTERIOR ELEVATION

A-211 ENLARGED EXTERIOR ELEVATION

A-212 | ENLARGED EXTERIOR ELEVATION

A-510 SIGNAGE DETAILS & GRAPHICS SCHEDULES

A-602 OVERALL BASEMENT FLOOR BLOCKING PLAN

A-601 OVERALL FIRST FLOOR BLOCKING PLAN

A-141 PARTIAL BASEMENT REFLECTED CEILING PLAN-EAST

A-131 PARTIAL FIRST FLOOR REFLECTED CEILING PLAN - EAST

A-132 PARTIAL FIRST FLOOR REFLECTED CEILING PLAN - WEST

A-121 PARTIAL BASEMENT FLOOR PLAN - EAST

A-003 DOOR SCHEDULE, NOTES, HARDWARE & DOOR TYPES

ARCHITECTURAL

WILLIAMS-SONOMA, INC.
3250 VAN NESS ÄVENUE
SAN FRANCISCO, CA 94109
415.616.8453 FAX: 415.439.103
CONTACT: JOSH GEURTSEN
EMAIL: jgeurtsen@wsgc.com
Lim Let 1900. Come Hogoloom

CONSTRUCTION MANAGER: JACKS CONSTRUCTION MANAGEMENT 815 WEST STEWART ROAD COLUMBIA, MO 65203 415.385.7050 FAX: 415.946.3482 CONTACT: MOLLY JACKS EMAIL: molly@jackscm.com

PORT CITY ARCHITECTURE 65 NEWBURY STREET PORTLAND, ME 04101 207.761.9000 FAX: 207.761.2010 CONTACT: LITA SEMRAU EMAIL: lita@portcityarch.com

CALLISONRTKL INC. 1420 FIFTH AVENUE #2400 SEATTLE, WA 98101-2343 206.623.4646 FAX: 206.623.4625 CONTACT: COLBY CHAPMAN EMAIL: colby.chapman@callisonrtkl.com

MECHANICAL, ELECTRICAL AND PLUMBING ENGINEER: 6615 VAUGHT RANCH ROAD, SUITE 200 AUSIIN, 1X /8/30 512.744.4439 FAX: 512.744.4444 CONTACT: BILL KLOCK EMAIL: billklock@eeace.com

206.332.1900 FAX: 206.332.1600 CONTACT: BRUCE ZHONG EMAIL: bzhong@dci-engineers.com

NO. SHEET NAME S-303 STRUCTURAL DETAILS MECHANICAL M-001 MECH INFORMATION AND DRAWING LIST- MECHANICAL M-002 HVAC SCHEDULES M-003 | HVAC CALCULATIONS

M-004 HVAC CALCULATIONS

M-110 OVERALL HVAC PLANS

M-120 BASEMENT HVAC PLAN

M-301 MECHANICAL DETAILS

P-002 | SCHEDULES PLUMBING

P-201 PLUMBING DETAILS

P-202 PLUMBING RISER DIAGRAMS

E-001 | ELECTRICAL LEGENDS AND NOTES

E-002 LIGHTING FIXTURE SCHEDULE

E-006 ENERGY CODE CALCULATIONS

E-120 BASEMENT POWER PLAN

E-140 BASEMENT LIGHTING PLAN

E-201 ELECTRICAL DETAILS

E-202 | ELECTRICAL DETAILS

E-203 ELECTRICAL DETAILS

E-204 | ELECTRICAL DETAILS

E-205 ELECTRICAL DETAILS

E-206 ELECTRICAL DETAILS

E-501 PANEL SCHEDULES

E-401 | ELECTRICAL RISER DIAGRAM

E-901 | ELECTRICAL SPECIFICATIONS

E-902 | ELECTRICAL SPECIFICATIONS

E-110 OVERALL FIRST FLOOR POWER PLAN

E-111 PARTIAL FIRST FLOOR POWER PLAN

E-112 PARTIAL FIRST FLOOR POWER PLAN

E-122 PARTIAL BASEMENT POWER PLAN

E-130 OVERALL FIRST FLOOR LIGHTING PLAN

E-131 PARTIAL FIRST FLOOR LIGHTING PLAN

E-132 PARTIAL FIRST FLOOR LIGHTING PLAN

E-003 LIGHTING CONTROLS

E-004 LIGHTING CONTROLS

E-005 | SOUND SYSTEM

M-111 PARTIAL FIRST FLOOR HVAC PLAN

M-112 PARTIAL FIRST FLOOR HVAC PLAN

M-901 | SPECIFICATIONS - MECHANICAL

M-902 | SPECIFICATIONS - MECHANICAL

M-903 | SPECIFICATIONS - MECHANICAL

PLUMBING

ELECTRICAL

P-001 INFORMATION AND DRAWING LIST - PLUMBING

P-110 OVERALL FIRST FLOOR PLUMBING PLAN


P-111 PARTIAL FIRST FLOOR PLUMBING PLAN

P-112 PARTIAL FIRST FLOOR PLUMBING PLAN

P-120 OVERALL BASEMENT PLUMBING PLAN

P-121 PARTIAL BASEMENT PLUMBING PLAN

P-122 PARTIAL BASEMENT PLUMBING PLAN





10

•		
•	ISSUED / REVISED	DATE
•	PRELIMINARY SET	09/08/1
•	LL COORDINATION SET	11/08/1
•	LL/PERMIT SET	11/21/1
•		
•		
		-
•	·	
	,	

GENERAL INFORMATION

PLAN	GENERAL	NOTES		SITE
L_/ \! \		IVOILO	•	

1. PROVIDE BLOCKING AND BACKING AS DEFINED IN SPECIFICATION IN EXISTING WALLS AND NEW PARTITIONS FOR ALL CASEWORK, SHELVING, COUNTERTOPS, 2. VERIFY FIELD CONDITIONS PRIOR TO COMMENCEMENT OF EACH PORTION OF THE TOILET ACCESSORIES, AND OWNER SUPPLIED EQUIPMENT. COORDINATE WITH SHOP DRAWINGS

PROPOSED OCCUPANCY:

SPRINKLERS TYPE:

PLUMBING WORK.

SEPARATE PERMIT.

SEPARATE PERMIT.

- 2. FOR CEILING AND SOFFIT FINISHES SEE REFLECTED CEILING PLAN
- 3. ALL ANGLED WALLS ARE AT 45', 90' OR 135' UON
- 4. WHERE DEMOLITION OCCURS ADJACENT TO EXISTING TO REMAIN, PATCH AND REPAIR ADJACENT CONDITIONS FOR A UNIFORM APPEARANCE
- 5. ALL EXISTING STEEL WIDE FLANGE, TUBE OR PIPE COLUMNS IN PUBLIC AREAS TO BE PAINTED AND TO RECEIVE BASE. VERIFY WITH ARCHITECT IF COLUMN CONDITION IS ACCEPTABLE TO REMAIN EXPOSED. OTHERWISE PROVIDE MINIMAL FURRING AND GWB AROUND COLUMN
- 6. MAINTAIN FIRE RESISTANCE RATING FOR ALL TENANT DEMISING WALLS
- 7. FOR DOOR SCHEDULE SEE A-003
- 8. PROVIDE BRIDGING AT SALES FLOOR WALLS WHERE GWB OCCURS AT ONLY (1) SIDE PER STRUCTURAL
- 9. ALL WOOD USED FOR BLOCKING, PARTITIONS, PLATFORM FRAMING AND PLYWOOD UNDERLAYMENT TO BE FIRE RETARDANT.

WEST ELM 11,190 SF

S-302 | STRUCTURAL DETAILS H:\Projects\WSonoma\WestElm\weport\Caddweport\Sheets\weport_a-000.dwg

9:09 AM

COPYRIGHT © 2016 CallisonRTKL Inc.

A-000