

C. QUALITY ASSURANCE:

- PAINT COATINGS SHALL BE FREE OF DUST, DIRT, FLOW LINES, STREAKS, SAGS, BLISTERS, PINHOLES, RUNS, OR OTHER SURFACE IMPERFECTIONS.
- IN ADDITION TO THE COATS SPECIFIED, PROVIDE ADDITIONAL COATS AS REQUIRED TO OBTAIN ADEQUATE HIDE.
- APPLICATOR QUALIFICATIONS: COMPANY SPECIALIZING IN COMMERCIAL PAINTING AND FINISHING WITH A MINIMUM OF THREE YEARS DOCUMENTED EXPERIENCE.

F. PRODUCTS

A. MATERIALS:

- CONTRACTOR PROVIDED PAINTS:
 - MANUFACTURERS AND COLORS AS LISTED IN THE MATERIALS AND FINISH LEGEND. NO SUBSTITUTIONS.
 - PROVIDE MANUFACTURERS PREMIUM GRADE PAINTS AND PRIMERS.

3. EXECUTION

A. PREPARATION:

- MOISTURE CHECK: CHECK FOR EXCESS MOISTURE USING AN ELECTRONIC MOISTURE METER. DO NOT PAINT MATERIALS WITH EXCESS MOISTURE LEVELS WHICH WOULD IMPAIR THE BONDING OF FINISH COATINGS.
- HARDWARE AND MISCELLANEOUS ITEMS:
 - CAREFULLY REMOVE ELECTRICAL OUTLET AND SWITCH PLATES, MECHANICAL DIFFUSERS, ESCUTCHEONS, SURFACE HARDWARE, FITTINGS AND FASTENINGS PRIOR TO STARTING WORK.
 - CAREFULLY STORE, CLEAN AND REPLACE THESE ITEMS UPON COMPLETION OF WORK IN EACH AREA.
 - DO NOT USE SOLVENT OR ABRASIVES TO CLEAN HARDWARE THAT WILL REMOVE THE PERMANENT LACQUER FINISH NORMALLY USED ON SOME OF THESE ITEMS.
- PREPARE SURFACES BY REMOVING ALL DIRT, DUST, GREASE, OIL, MOISTURE, AND OTHER CONTAMINANTS WHICH WILL IMPAIR THE PROPER ADHESION OF THE FINISH.
- MASK ADJACENT SURFACES.
- FERROUS METAL SHOP PRIMED UNDER OTHER SECTIONS: SOLVENT CLEAN PREVIOUSLY PRIMED SURFACES TO REMOVE OIL AND GREASE. REMOVE LOOSE RUST, BLISTERED AND PEELING PAINT TO BARE METAL BY SCRAPING, SANDING, AND WIRE BRUSHING IN ACCORDANCE WITH SSPC-SP2 AND SSPC-SP3. IMMEDIATELY APPLY TOUCH UP PRIME DAMAGED OR ABRADED SURFACES. LIGHTLY SAND ALL SHOP PRIME PAINTED SURFACES TO RECEIVE PAINT FINISH.
- GALVANIZED FERROUS METAL: SOLVENT CLEAN IN ACCORDANCE WITH SSPC-SP1.
- UNPRIMED FERROUS METAL:
 - SOLVENT CLEAN IN ACCORDANCE WITH SSPC SP-1.
 - COMMERCIAL BLAST PER SSPC SP3.
- WOOD AND MDF OPAQUE PAINT FINISH: FILL ALL NAIL HOLES AND CRACKS. SAND FILLER SMOOTH AND LEVEL WITH WOOD SURFACE.
- WOOD - TRANSPARENT FINISH: FILL ALL EXPOSED FINISH NAIL HOLES AND CRACKS WITH MATCHING COLOR FILLER AFTER PRIME COAT IS APPLIED. SAND FILLER SMOOTH AND LEVEL WITH ADJACENT SURFACES.
- GYPSUM BOARD: REMOVE ALL LIGHT DUST AND DIRT.

B. APPLICATION REQUIREMENTS:

- UNLESS SPECIFIED OR INDICATED OTHERWISE, FOLLOW PAINT MANUFACTURER'S LABEL DIRECTIONS FOR GENERAL APPLICATION PROCEDURES AND COVERAGE RATES.
- DO NOT APPLY FINISHES ON SURFACES THAT ARE NOT SUFFICIENTLY DRY. MAKE SURE EACH COAT OF FINISH IS DRY AND HARD BEFORE A FOLLOWING COAT IS APPLIED UNLESS THE MANUFACTURER'S DIRECTIONS STATE OTHERWISE.
- TINT FILLER TO MATCH STAIN WHEN CLEAR FINISHES ARE SPECIFIED; WORK FILLER WELL INTO GRAIN AND, BEFORE IT HAS SET, WORKING PERPENDICULARLY TO THE GRAIN, WIPE THE EXCESS FROM THE SURFACE.
- OPAQUE FINISHES:
 - APPLY NUMBER OF COATS SCHEDULED, EXCEPT THAT ADDITIONAL FINISH COATS SHALL BE APPLIED AS NECESSARY FOR COMPLETE HIDING OF SUBSTRATE COLORS.
 - APPLY PRIMER COATS UNTINTED, WHERE MORE THAN ONE COAT OF PAINT IS REQUIRED, TINT EACH SUCCEEDING COAT UP TO THE FINAL COAT SIMILAR IN TINT, BUT SLIGHTLY LIGHTER IN VALUE (SHADE).
 - SAND LIGHTLY BETWEEN COATS IF NECESSARY TO ACHIEVE REQUIRED FINISH; SAND BETWEEN ALL COATS APPLIED TO WOOD SUBSTRATES.
- ROLLERS FOR APPLICATION AND BACKROLLING OF LATEX PAINTS SHALL HAVE A NAP OF 3/8 INCH OR LESS.
- WHERE ROLLER TEXTURE IS SCHEDULED FOR APPLICATION TO GYPSUM BOARD SURFACES, FINISH COATS MAY BE ROLLER-APPLIED, OR SPRAY APPLIED AND BACKROLLED AT CONTRACTOR'S OPTION.
- FACTORY PRIMED SURFACES: APPLY SCHEDULED FINISH SYSTEM, LESS PRIMER COAT, EXCEPT AS NECESSARY TO FOR PATCHING DAMAGE TO FACTORY PRIME COATING.

C. INTERIOR SYSTEMS:

- GYPSUM BOARD:
 - LATEX SYSTEM: 1 COAT PVA PRIMER, 2 COATS OF LATEX PAINT. INTERIOR GYPSUM BOARD SURFACES, UNLESS NOTED OTHERWISE.
 - INTERIOR WOOD SURFACES - LATEX SYSTEM:
 - WOOD - OPAQUE LATEX SYSTEM: LATEX PRIMER AND 2 COATS OF LATEX ENAMEL.
 - WOOD - TRANSPARENT FINISH: 2 COAT POLYURETHANE VARNISH SYSTEM, STAIN TO MATCH ARCHITECT SAMPLE AND TO MATCH SHOP APPLIED COATINGS SPECIFIED FOR WOOD CASEWORK.
- INTERIOR FERROUS METAL AND GALVANIZED - ACRYLIC SYSTEM:
 - SYSTEM: THREE COATS; FIRST COAT ACRYLIC DTM PRIMER; SECOND AND THIRD COATS LATEX FINISH. THE PRIMER MAY BE OMITTED AT FACTORY PRIMED SURFACES, EXCEPT AS NECESSARY TO RECOAT DAMAGED OR ABRADED PREPRIMED SURFACES.
 - SHEEN: SEMI-GLOSS, UNLESS INDICATED OTHERWISE.
 - APPLICATION: INTERIOR FERROUS METAL SURFACES INCLUDING HOLLOW STEEL METAL DOORS AND FRAMES, ACCESS DOORS AND PANELS, AND FIRE EXTINGUISHER CABINETS.
- EXPOSED PLENUM SURFACES - OPAQUE LATEX SYSTEM:
 - SYSTEM: THREE COATS; FIRST COAT DRY-FALL PLENUM PAINT SELF-PRIMER, SECOND AND THIRD COATS DRY-FALL PLENUM PAINT.
 - APPLICATION: OVERHEADS, INCLUDING STRUCTURAL STEEL BEAMS AND DECKING, FIREPROOFING, PIPING AND CONDUITS, DUCTWORK, AND SUSPENSION DEVICES. (MASK AND PROTECT LABELS, LAMPS, FEATURE ELEMENTS, SPRINKLER HEADS, LOUVERS, AND SIMILAR ITEMS).
 - APPLY NUMBER OF COATS SCHEDULED, EXCEPT THAT ADDITIONAL FINISH COATS SHALL BE APPLIED AS NECESSARY FOR COMPLETE HIDING OF STRUCTURAL STEEL BEAMS AND DECKING, FIREPROOFING, PIPING AND CONDUITS, DUCTWORK, AND SUSPENSION DEVICES.

D. COLOR SCHEDULE: PROVIDE PAINT COLORS TO MATCH THOSE INDICATED ON THE DRAWINGS. WHERE A PAINT COLOR IS LISTED FROM A SPECIFIC MANUFACTURER, PAINT PRODUCTS FROM OTHER APPROVED MANUFACTURERS MAY BE USED, PROVIDED THE COLOR EXACTLY MATCHES THE SPECIFIED COLOR, AND THE PAINT SYSTEM MEETS THE SPECIFIED REQUIREMENTS. WHERE NO PAINT COLOR IS INDICATED, PROVIDE COLOR AND SHEEN AS SELECTED BY THE ARCHITECT.

E. CLEANUP

- AS THE WORK PROCEEDS AND ON COMPLETION OF THE WORK, PROMPTLY REMOVE ALL PRIMERS, PAINTS AND FINISHES WHERE SPILLED, SPLASHED OR SPLATTERED IN A MANNER NOT TO DAMAGE THE SURFACE FROM WHICH IT IS REMOVED.
- REMOVE MASKING.

099733 - CONCRETE SEALER

1. GENERAL

A. SECTION INCLUDES: SEALING OF CONCRETE FLOOR SLABS EXPOSED TO VIEW IN THE FINISHED WORK.

2. PRODUCTS

A. ACRYLIC SEALERS: VOC COMPLIANT, AS SCHEDULED ON THE DRAWINGS.

3. EXECUTION

A. CLEAN SURFACES TO RECEIVE SEALER, USING MANUFACTURER'S RECOMMENDED CLEANING COMPOUNDS, AND IN ACCORDANCE WITH THE MANUFACTURER'S REQUIREMENTS.

B. MASK OR OTHERWISE PROTECT ADJACENT SURFACES.

C. APPLY CONCRETE FLOOR SEALER TO ALL INTERIOR CONCRETE FLOOR SLABS SCHEDULED TO REMAIN EXPOSED IN THE FINISHED WORK.

D. ROLLER OR SPRAY-APPLY SEALER IN ACCORDANCE WITH THE MANUFACTURER'S APPLICATION INSTRUCTIONS. APPLY TWO COATS.

DIVISIONS 10 - SPECIALTIES

102813 - TOILET ACCESSORIES

1. GENERAL

A. SECTION INCLUDES: INSTALLATION OF TOILET ACCESSORIES.

2. PRODUCTS:

A. PROVIDE THE FOLLOWING ACCESSORIES AS MANUFACTURED BY BOBRICK WASHROOM EQUIPMENT COMPANY, UNLESS INDICATED OTHERWISE.

B. FINISHES SHALL BE SATIN STAINLESS STEEL, UNLESS INDICATED OTHERWISE.

C. ACCESSORIES - PUBLIC TOILET:

- GRAB BARS (GB):
 - TWO WALL BAR: B-68137 SERIES, 36" BY 54", CONFIGURATION AS INDICATED.
 - VERTICAL BAR: B-6806, 18", INSTALL IF REQUIRED AND NOTED ON DRAWINGS, CONFIGURATION AS INDICATED.
- TOILET PAPER DISPENSER (TPD): MULTI-ROLL B-69997.
- SOAP DISPENSER (SD): B-4112.
- SEAT COVER DISPENSER(SCD): B-4221.
- BABY CHANGING STATION: KOALA CORPORATION (888-733-3456); KB110-SSRE.
- COAT HOOK (DCH): VOLA FIXTURES, INC., T18; BRUSHED CHROME.
- ELECTRIC HAND DRYER:
 - NEWTON DISTRIBUTING COMPANY, NEWTON, MA (617 795-7330); XL -W HAND DRYER WITH 1.1" NOZZLE; WHITE FINISH; 120VAC, 12.5 AMP UNIT.
 - PROVIDE XLERATOR RECESS KIT #40602.
- MIRROR: B-165 24X48.

3. EXECUTION: INSTALL FIXTURES, ACCESSORIES AND ITEMS IN ACCORDANCE WITH MANUFACTURER'S INSTRUCTIONS, AND AS INDICATED ON THE DRAWINGS.

104416 - FIRE EXTINGUISHERS AND CABINETS

1. GENERAL

A. SECTION INCLUDES

- CODE REQUIRED FIRE EXTINGUISHERS
- FIRE EXTINGUISHER CABINETS.

2. PRODUCTS

A. EXTINGUISHERS: MULTI-PURPOSE DRY CHEMICAL TYPE (FE): HEAVY DUTY DOT STEEL TANK; UL RATING 2A-10B-C, 5 LB CAPACITY, WITH PRESSURE GAUGE, RED ENAMEL FINISH; METAL VALVES AND SIPHON TUBES.

B. CABINETS:

- CABINETS SHALL BE RECESSED, EXCEPT PROVIDE SEMI-RECESSED WHERE REQUIRED TO ACCOMMODATE WALL DEPTH.
- DOOR: FORMED SHEET STEEL, MINIMUM 20 GAGE; REINFORCED FOR FLATNESS AND RIGIDITY; SATIN ZINC OR ALUMINUM PULL, ROLLER CATCH, AND CONTINUOUS HINGE; CLEAR GLASS VISION PANEL.
- CABINET FINISHES:
 - CABINET TRIM AND DOOR: MANUFACTURER'S STANDARD PRIMED FINISH TO RECEIVE PAINT COATINGS AS SPECIFIED IN SECTION 099000.
 - CABINET INTERIOR: MANUFACTURER'S STANDARD WHITE EPOXY OR WHITE BAKED ENAMEL.

C. FIRE EXTINGUISHER BRACKETS:

- WALL MOUNT TYPE, APPROPRIATE TO THE SIZE OF THE EXTINGUISHER, EQUIPPED WITH STRAP AND QUICK RELEASE CLIP. PROVIDE ONE PER CABINET; MOUNT EXTINGUISHERS TO BRACKETS.
- PROVIDE AT FIRE EXTINGUISHER LOCATIONS WHERE NO CABINET IS INDICATED.

3. EXECUTION

A. INSTALL CABINETS PLUMB AND LEVEL IN WALL OPENINGS AND SECURED TO FRAMING IN LOCATIONS AS INDICATED AND AS REQUIRED BY THE FIRE DEPARTMENT. UNLESS OTHERWISE INDICATED, INSTALL 30 INCHES FROM FINISHED FLOOR TO INSIDE BOTTOM OF CABINET.

B. SECURE RIGIDLY IN PLACE IN ACCORDANCE WITH MANUFACTURER'S INSTRUCTIONS.

C. WHEN RECESSED CABINETS ARE INSTALLED IN FIRE RATED WALLS, MAINTAIN FIRE RESISTANCE RATING CONTINUOUSLY BEHIND THE CABINET.

D. INSTALL FIRE EXTINGUISHER IN EACH FIRE EXTINGUISHER CABINET BY BRACKETS MOUNTED AT BACK OF CABINET.

E. WHERE FIRE EXTINGUISHERS ARE INDICATED FOR WALL MOUNTING, SECURE BRACKET TO WALL THROUGH FINISH TO FRAMING OR BLOCKING.

DIVISION 11 - EQUIPMENT

NOT USED

DIVISION 12 - FURNISHINGS

124813 - ENTRANCE FLOOR MATS AND GRATES

1. GENERAL

A. SECTION INCLUDES:

- CARPET ENTRY MATS.
- RIGID GRATES.
- PERIMETER ANGLE FRAME.

B. RELATED SECTIONS:

- 035416 - HYDRAULIC CEMENTITIOUS UNDERLAYMENT: UNDERLAYMENT AND TAPERED FILL.

C. SUBMITTALS

- MAKE SUBMITTALS IN ACCORDANCE WITH SECTION 013300.
- SHOP DRAWINGS: INDICATE PERIMETER ANGLE FRAME SIZE AND LOCATIONS, MAT JOINT LOCATIONS, RIGID GRATE FASTENING DETAILS, AND RELEVANT DETAILS OF ADJACENT CONSTRUCTION. INDICATE METHOD FOR FASTENING FRAME TO SUBSTRATE.

2. PRODUCTS

A. MATS AND ACCESSORIES

- CARPET ENTRY MATS: COCOMAT AS SCHEDULED ON THE DRAWINGS.
- RIGID GRATES: NYSTOM "ENVIRONMENTAL RIGID GRATE"; 11/16 INCH DEPTH.
- PERIMETER ANGLE FRAME: EXTRUDED ALUMINUM PERIMETER FRAME; AS INDICATED ON THE DRAWINGS; CLEAR ANODIZED FINISH; PRE-DRILL FRAME TO RECEIVE ANCHORS FOR INSTALLATION; FRAME SECTIONS SHALL BE IN CONTINUOUS LENGTHS. COORDINATE FRAME SIZE WITH RIGID GRATE MODULE.
- MISCELLANEOUS ACCESSORIES: FURNISH FASTENERS, SLEEVE ANCHORS, AND OTHER MATERIALS AS NECESSARY FOR A COMPLETE INSTALLATION.

3. EXECUTION

A. EXAMINATION: VERIFY THAT SUBSTRATE IS PROPERLY LEVEL, CLEAN, AND READY FOR INSTALLATION OF ENTRY MAT FRAME.

B. INSTALLATION

- MECHANICALLY FASTEN ENTRY MAT FRAME SECTIONS ACCURATELY INTO POSITIONS AS INDICATED. CORNER JOINTS SHALL BE MITERED AND TIGHTLY BUTTED. FOR EACH ANGLE FRAME SECTION, PLACE FASTENERS 2 INCHES FROM EACH END AND AT MAXIMUM 24 INCHES ON CENTER ALONG THE LENGTH.
- COORDINATE INSTALLATION OF SLAB LEVELING MATERIAL WITHIN PERIMETER FRAME AREA AS NECESSARY TO ALIGN THE CRUSH LINE OF THE ENTRY MAT AND TOP OF RIGID GRATE WITH PERIMETER FRAME.
- INSTALL CARPET ENTRY MATS IN ACCORDANCE WITH THE MANUFACTURER'S INSTRUCTIONS. PLACE CARPET ENTRY MAT TIGHT TO THE SUBSTRATE WITH A UNIFORM APPEARANCE FREE OF WRINKLES. TRIM AT PERIMETER EDGES FOR TIGHT BUTT FIT TO FRAME.
- INSTALL RIGID GRATES IN ACCORDANCE WITH THE MANUFACTURER'S INSTRUCTIONS. TRIM AT PERIMETER EDGES FOR PERPENDICULAR FIT TO FRAME.

DIVISION 13 - SPECIAL CONSTRUCTION

NOT USED

DIVISION 14 - CONVEYING SYSTEMS

144216 - VERTICAL WHEELCHAIR LIFTS

1. GENERAL

A. SECTION INCLUDES: COMMERCIAL VERTICAL WHEELCHAIR LIFT.

B. SUBMITTALS:

- SUBMIT COMPLETE MANUFACTURER'S PRODUCT DATA.
- SHOP DRAWINGS: INDICATE ADJACENT CONSTRUCTION, ANCHORAGE DETAILS, ELECTRICAL CONNECTIONS, AND PROVISIONS FOR CONTROL CONNECTION.
- SUBMIT COMPLETE MAINTENANCE AND OPERATION MANUALS IN ACCORDANCE WITH 017700.

C. QUALITY ASSURANCE:

- INSTALLER QUALIFICATIONS: MANUFACTURER AUTHORIZED DEALER.
- REGULATORY REQUIREMENTS: CONFORM WITH THE FOLLOWING:
 - NFPA 70.
 - AMERICAN SOCIETY OF MECHANICAL ENGINEERS (ASME) A17.1 - SAFETY CODE FOR ELEVATORS AND ESCALATORS.
 - AMERICAN SOCIETY OF MECHANICAL ENGINEERS (ASME) A18.1 - SAFETY STANDARD FOR PLATFORM AND STAIRWAY CHAIR LIFTS.
 - AMERICANS WITH DISABILITIES ACT (ADA)
 - ALL COMPONENTS SHALL BE UL LISTED.

D. WARRANTY: FURNISH MANUFACTURER'S STANDARD 3 YEAR WARRANTY.

2. PRODUCTS

A. MANUFACTURER: SAVARIA (BRAMPTON, ON, CANADA: 800-661-5112; WWW.SAVARIA.COM).

B. VERTICAL PLATFORM LIFTS: SAVARIA "PRESTIGE FRAMELESS (V-1504 PRESTIGE)";

- CAPACITY: 750 LBS RATED LOAD
- MAXIMUM TRAVEL DISTANCE: 23 FEET.
- PLATFORM SIZE: 36 INCHES X 54 INCHES.
- SPEED: 20 FPM
- LIFT HEIGHT: AS INDICATED ON THE DRAWINGS
- CAR ACCESS/CONFIGURATIONS: STRAIGHT THROUGH ENTER/EXIT
- POWER SUPPLY: 110 VOLT, 20 AMP, SINGLE PHASE, 60 HZ
- DRIVE SYSTEM: 2:1 ROLLER CHAIN, HYDRAULIC
- MOTOR PUMP: 3 HP, GEAR-TYPE
- CONTROLLER: RELAY LOGIC
- EMERGENCY OPERATION: BATTERY-OPERATED LOWERING WITH AUTOMATIC RECHARGING SYSTEM, PLUS REMOTE ACCESS MANUAL LOWERING VALVE
- BATTERY BACKUP: PROVIDE BATTERY BACK-UP OPERATING SYSTEM TO ALLOW FULL FUNCTIONALITY OF THE LIFT IN EMERGENCIES.
- FINISH:
 - MANUFACTURERS FRAMELESS STRUCTURAL TEMPERED GLASS ENCLOSURE WITH NO VISIBLE FRAME.
 - PROVIDE GLASS DOORS AT FRONT AND REAR OF THE LIFT PIT, INTERLOCKED WITH OPERATION OF THE LIFT.

3. EXECUTION

A. EXAMINATION:

- PRIOR TO STARTING WORK, CAREFULLY INSPECT INSTALLED WORK OF OTHER TRADES AND VERIFY THAT SUCH WORK IS COMPLETE TO THE POINT WHERE WORK OF THIS SECTION MAY PROPERLY COMMENCE. NOTIFY THE ARCHITECT IN WRITING OF CONDITIONS DETRIMENTAL TO THE PROPER AND TIMELY COMPLETION OF THE WORK.
- DO NOT BEGIN INSTALLATION UNTIL ALL UNSATISFACTORY CONDITIONS ARE RESOLVED. BEGINNING WORK CONSTITUTES ACCEPTANCE OF SITE CONDITIONS AND RESPONSIBILITY FOR DEFECTIVE INSTALLATION CAUSED BY PRIOR OBSERVABLE CONDITIONS.

B. INSTALLATION

- INSTALL EACH SYSTEM IN ACCORDANCE WITH THE MANUFACTURER'S PRINTED RECOMMENDATIONS, THE APPROVED SHOP DRAWINGS, AND IN ACCORDANCE WITH ALL APPLICABLE CODES AND SAFETY REGULATIONS.
- COORDINATE INSTALLATION OF RELATED COMPONENTS TO RECEIVE INSTALLATION WHEELCHAIR LIFT.

C. DEMONSTRATION:

- UPON COMPLETION OF THE INSTALLATION AND AT A TIME CONVENIENT TO THE OWNER, FURNISH THE SERVICES OF A TRAINED REPRESENTATIVE TO INSTRUCT THE OWNER'S PERSONNEL IN MAINTENANCE AND TROUBLE-SHOOTING OF EQUIPMENT.

DIVISION 21 - FIRE SUPPRESSION

210033 - DESIGN-BUILD FIRE SUPPRESSION

1. FIRE PROTECTION SYSTEMS ARE DESIGN/BUILD, AND SHALL CONFORM TO THE REQUIREMENTS OF THE JURISDICTIONAL CODE AUTHORITIES, AND REQUIREMENTS OF THE LANDLORD.

2. SPRINKLER HEADS IN RETAIL SALES AREA CEILINGS SHALL BE THE FULLY-CONCEALED TYPE, FINISHED TO MATCH THE CEILING THEY ARE INSTALLED IN. SPRINKLER HEADS IN THE REMAINDER OF THE STORE SHALL BE EITHER CONCEALED OR SEMI-RECESSED, CHROME FINISH WITH WHITE TRIM.

3. FIRE PROTECTION SUBCONTRACTOR SHALL FURNISH STAMPED, SIGNED SHOP DRAWINGS OF THE SPRINKLER SYSTEM PREPARED BY A PROFESSIONAL ENGINEER LICENSED TO PRACTICE IN THE STATE WHERE THE PROJECT IS LOCATED.

4. SUBMIT APPROVED SHOP DRAWINGS FOR LOCAL BUILDING DEPARTMENT AND FIRE MARSHAL REVIEW AND APPROVAL, AS SUBMITTAL FOR PERMIT, AS REQUIRED.

DIVISION 22 - PLUMBING


SEE APPROPRIATE PLUMBING DRAWINGS FOR PLUMBING SPECIFICATIONS.

DIVISION 23 - HEATING, VENTILATING, AND AIR CONDITIONING

SEE APPROPRIATE MECHANICAL DRAWINGS FOR MECHANICAL SPECIFICATIONS.

DIVISION 26 - ELECTRICAL

SEE APPROPRIATE ELECTRICAL DRAWINGS FOR ELECTRICAL SPECIFICATIONS.

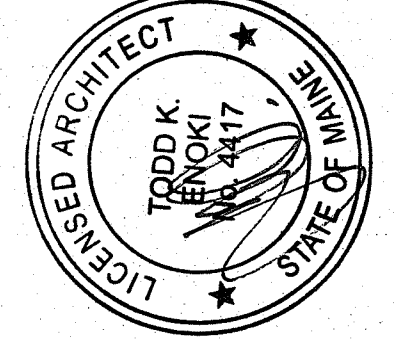

CALLISONRTKLTM
A DESIGN CONSULTANCY OF ARCADIS
CALLISONRTKL, INC.
www.callisonrtkl.com

west elm
Downtown Portland
164 Middle Street
Portland, ME 04101
PROJECT #006-1600335.00

ISSUED / REVISED	DATE
PRELIMINARY SET	09/08/16
LL COORDINATION SET	11/08/16
LL/PERMIT SET	11/17/16

SPECIFICATIONS

A-906

OWNER: **WILLIAMS-SONOMA, INC.**
3250 Van Ness Avenue
San Francisco, CA 94109
T 415 616 8602
F 415 439 8164
www.williams-sonoma.com