## City of Portland, Maine - Building or Use Permit Application 389 Congress Street, 04101, Tel: (207) 874-8703, FAX: 874-8716

Location of Construction:	Owner:	10 A	- Phone:		Permit No:	
Owner Address:	Lessee/Buyer's Name:	Phone:			990986	
5AA	Rappi and pone luc.	T none.	Dusines	stvallie.	PERMIT ISSUED	
Contractor Name:	Address:	Pho	ne:		Permit Issued:	
burr Singa	10 Buttonwood St so Por					
Past Use:	Proposed Use:	COST OF WOI \$	RK:	PERMIT FEE: \$33.08	SEP 1 3 1999	
Sar and Grill	same		Approved Denied	INSPECTION: 5.97498 Use Group: Type: BOCA96 71 00	CITY OF PORTLAND	
Proposed Project Description:		Signature:	A OPEN PETE	Signature: Hoffm	Zoning Approval:	
15,4 af building gign		Action:	Approved	vith Conditions:	Special Zone or Reviews: Shoreland Wetland Flood Zone	
		Signature:		Date:	□ Subdivision □ Site Plan maj □minor □mm □	
Permit Taken By:	Date Applied For:	. 24 1999 K				
<ol> <li>This permit application does not preclude the</li> <li>Building permits do not include plumbing, se</li> <li>Building permits are void if work is not started tion may invalidate a building permit and sto</li> </ol>	ptic or electrical work. I within six (6) months of the date of is:				□ Variance □ Miscellaneous □ Conditional Use □ Interpretation □ Approved □ Denied	
John 878–7901 *** PERMIT ISSUED WITH REQUIREMENTS					Historic Preservation <ul> <li>Not in District or Landmark</li> <li>Does Not Require Review</li> <li>Requires Review</li> </ul> Action:	
I hereby certify that I am the owner of record of the authorized by the owner to make this application a if a permit for work described in the application is areas covered by such permit at any reasonable ho	is his authorized agent and I agree to consistent is sued, I certify that the code official's	onform to all applicat authorized representa	ole laws of the ative shall hav	is jurisdiction. In addition, ve the authority to enter all	Appoved Approved with Conditions Denied Date:	
		E. 25. 1999				
SIGNATURE OF APPLICANT	ADDRESS:	DATE:		PHONE:		
RESPONSIBLE PERSON IN CHARGE OF WORL	K, TITLE			PHONE:	CEO DISTRICT	
White-Pe	rmit Desk Green-Assessor's Car	ary-D.P.W. Pink-P	ublic File I	vory Card-Inspector		

		BUILDING PERMIT REPORT						
	DATE:	25 Aug.99 ADDRESS: 94 Commercial ST, CBL: \$3\$ - A-\$\$5						
	REASON FOR PERMIT: <u>SIGNAG</u> . BUILDING OWNER: <u>BMCINC</u> .							
	PERMIT APPLICANT: /Contractor Burn Sign							
	ROUP CONSTRUCTION TYPE							
	The City's Adopted Building Code (The BOCA National Building Code/1996 with City Amendments) The City's Adopted Mechanical Code (The BOCA National Mechanical Code/1993)							
		CONDITION(S) OF APPROVAL						
	This permit is being issued with the understanding that the following conditions are met: $\frac{\frac{1}{2}}{\frac{1}{2}}$							
	Approv	red with the following conditions:						
K	1.	This permit does not excuse the applicant from meeting applicable State and Federal rules and laws.						
AL.	2.	Before concrete for foundation is placed, approvals from the Development Review Coordinator and Inspection Services must be obtained.						
	3.	(A 24 hour notice is required prior to inspection) Foundation drain shall be placed around the perimeter of a foundation that consists of gravel or crushed stone containing not more than						
	5.	10 percent material that passes through a No. 4 sieve. The drain shall extend a minimum of 12 inches beyond the outside edge of the						
		footing. The thickness shall be such that the bottom of the drain is not higher than the bottom of the base under the floor, and that the						
		top of the drain is not less than 6 inches above the top of the footing. The top of the drain shall be covered with an approved filter						
		membrane material. Where a drain tile or perforated pipe is used, the invert of the pipe or tile shall not be higher than the floor elevation. The top of joints or top of perforations shall be protected with an approved filter membrane material. The pipe or tile shall be						
		placed on not less than 2" of gravel or crushed stone, and shall be covered with an approved their memorane material. Section 1813.5.2						
	4.	Foundations anchors shall be a minimum of 1/2" in diameter, 7" into the foundation wall, minimum of 12" from corners of foundation and						
	e	a maximum 6' o.c. between bolts. (Section 2305.17)						
	5. 6.	Waterproofing and dampproofing shall be done in accordance with Section 1813.0 of the building code. Precaution must be taken to protect concrete from freezing. Section 1908.0						
	<ol> <li>It is strongly recommended that a registered land surveyor check all foundation forms before concrete is placed. This is done to verify</li> </ol>							
	_	that the proper setbacks are maintained.						
	8.	Private garages located <u>beneath habitable rooms</u> in occupancies in Use Group R-1, R-2, R-3 or I-1 shall be separated from adjacent						
		interior spaces by fire partitions and floor/ceiling assembly which are constructed with not less than 1-hour fire resisting rating. Private garages attached side-by-side to rooms in the above occupancies shall be completely separated from the interior spaces and the attic area						
		by means of 1/2 inch gypsum board or the equivalent applied to the garage means of 1/2 inch gypsum board or the equivalent applied to the						
		garage side. (Chapter 4, Section 407.0 of the BOCA/1996)						
	9.	All chimneys and vents shall be installed and maintained as per Chapter 12 of the City's Mechanical Code. (The BOCA National						
	10.	Mechanical Code/1993). Chapter 12 & NFPA 211 Sound transmission control in residential building shall be done in accordance with Chapter 12, Section 1214.0 of the City's Building						
	10.	Code.						
	11.	Guardrails & Handrails: A guardrail system is a system of building components located near the open sides of elevated walking surfaces						
		for the purpose of minimizing the possibility of an accidental fall from the walking surface to the lower level. Minimum height all Use Groups 42", except Use Group R which is 36". In occupancies in Use Group A, B, H-4, I-1, I-2, M and R and public garages and open						
		parking structures, open guards shall have balusters or be of solid material such that a sphere with a diameter of 4" cannot pass through						
		any opening. Guards shall not have an ornamental pattern that would provide a ladder effect. (Handrails shall be a minimum of 3e4" but						
		not more than 38". Use Group R-3 shall not be less than 30", but not more than 38".) Handrail grip size shall have a circular cross section						
		with an outside diameter of at least 1 ¼" and not greater than 2". (Sections 1021 & 1022.0) - Handrails shall be on both sides of stairway. (Section 1014.7)						
	12.	Headroom in habitable space is a minimum of 7'6". (Section 1204.0)						
	13.	Stair construction in Use Group R-3 & R-4is a minimum of 10" tread and 7 3/" maximum rise. All other Use Group minimum 11"						
		tread, 7" maximum rise. (Section 1014.0)						
	14. 15.	The minimum headroom in all parts of a stairway shall not be less than 80 inches. (6'8") 1014.4 Every sleeping room below the fourth story in buildings of Use Groups R and I-1 shall have at least one operable window or exterior door						
		approved for emergency egress or rescue. The units must be operable from the inside without the use of special knowledge or separate						
		tools. Where windows are provided as means of egress or rescue they shall have a sill height not more than 44 inches (1118mm) above						
		the floor. All egress or rescue windows from sleeping rooms shall have a minimum net clear opening height dimension of 24 inches						
		(610mm). The minimum net clear opening width dimension shall be 20 inches (508mm), and a minimum net clear opening of 5.7 sq. ft. (Section 1018.6)						

Each apartment shall have access to two (2) separate, remote and approved means of egress. A single exit is acceptable when it exits directly from the apartment to the building exterior with no communications to other apartment units. (Section 1010.1)

Type Foundation: Framing: Plumbing: Final: Other:			The installed manager to remind to call up for insp. when they then
Date			

- 17. All vertical openings shall be enclosed with construction having a fire rating of at least one (1) hour, including fire doors with self closer's. (Over 3 stories in height requirements for fire rating is two (2) hours.) (Section 710.0)
- 18. The boiler shall be protected by enclosing with (1)hour fire rated construction including fire doors and ceiling, or by providing automatic extinguishment. (Table 302.1.1)
- 19. All single and multiple station smoke detectors shall be of an approved type and shall be installed in accordance with the provisions of the City's Building Code Chapter 9, Section 920.3.2 (BOCA National Building Code/1996), and NFPA 101 Chapter 18 & 19. (Smoke detectors shall be installed and maintained at the following locations):
  - In the immediate vicinity of bedrooms
  - In all bedrooms
     In each story with
    - In each story within a dwelling unit, including basements

In addition to the required AC primary power source, required smoke detectors in occupancies in Use Groups R-2, R-3 and I-1 shall receive power from a battery when the AC primary power source is interrupted. (Interconnection is required) Section 920.3.2.

- 20. A portable fire extinguisher shall be located as per NFPA #10. They shall bear the label of an approved agency and be of an approved type. (Section 921.0)
- 21. The Fire Alarm System shall maintained to NFPA #72 Standard.
- 22. The Sprinkler System shall maintained to NFPA #13 Standard.
- 23. All exit signs, lights and means of egress lighting shall be done in accordance with Chapter 10 Section & Subsections 1023.0 & 1024.0 of the City's Building Code. (The BOCA National Building Code/1996)
- 24. Section 25-135 of the Municipal Code for the City of Portland states, "No person or utility shall be granted a permit to excavate or open any street or sidewalk from the time of November 15 of each year to April 15 of the following year".
- 25. The builder of a facility to which Section 4594-C of the Maine State Human Rights Act Title 5 MRSA refers, shall obtain a certification from a design professional that the plans commencing construction of the facility, the builder shall submit the certification the Division of Inspection Services.
- 26. Ventilation shall meet the requirements of Chapter 12 Sections 1210.0 of the City's Building Code. (Crawl spaces & attics).
- 27. All electrical, plumbing and HVAC permits must be obtained by a Master Licensed holders of their trade. No closing in of walls until all electrical (min.72 hours notice) and plumbing inspections have been done.
- 28. All requirements must be met before a final Certificate of Occupancy is issued.
- 29. All building elements shall meet the fastening schedule as per Table 2305.2 of the City's Building Code (the BOCA National Building Code/1996).
- 30. Ventilation of spaces within a building shall be done in accordance with the City's Mechanical Code (The BOCA National Mechanical Code/1993). (Chapter M-16)
- 31. Please read and implement the attached Land Use Zoning report requirements.
- 32. Boring, cutting and notching shall be done in accordance with Sections 2305.4.4, 2305.5.1 and 2305.5.3 of the City's Building Code.
- 33. Glass and glazing shall meet the requirements of Chapter 24 of the building code.
- All signage, shall be done in accordance with Section 3102.0 signs of the City's Building Code, (The BOCA National Building Code 1996).
   35.


P. Sanuel Doffses, Building Inspector McDougall, PFD cc:

Marge Schmuckal, Zoning Administrator

PSH 7/24/99

38.

\*\*On the basis of plans submitted and conditions placed on these plans any deviations shall require a separate approval.

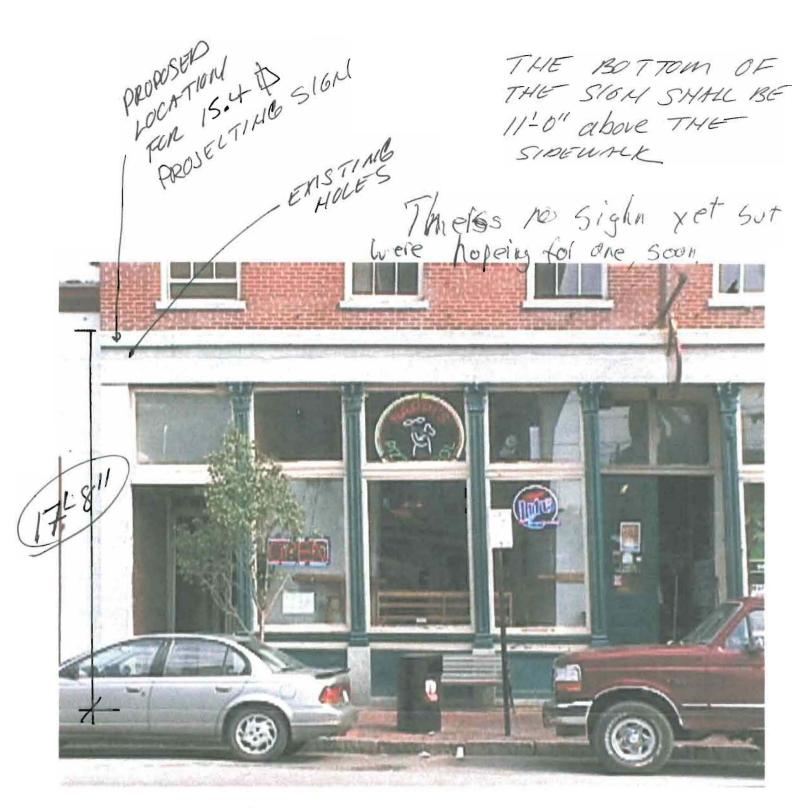

X X 17:011

4

1	ACORD. CERTI	FICATE OF LI		1 <u>.</u> 1111 - 221200	and the second	<b>date (mm/dd/yy)</b> 08/23/99		
PRO	DUCER TURNER BARKEF	R INSURANCE	ONLY AN HOLDER.	D CONFERS N THIS CERTIFICA	UED AS A MATTER ( O RIGHTS UPON TI TE DOES NOT AMEI AFFORDED BY THE F	HE CERTIFICATE		
	ONE INDIA ST			AFFORDING COVERA				
	PORTLAND	COMPANY A	COMPANY					
NSU	RED		COMPANY	THILLY CIT				
NAPPI'S PIZZA & PASTA NAPPI & SONS INC 94 COMMERCIAL ST			В					
	PORTLAND	COMPANY D						
201	/ERAGES		i					
	INDICATED, NOTWITHSTANDING AN CERTIFICATE MAY BE ISSUED OR	LICIES OF INSURANCE LISTED BELO NY REQUIREMENT, TERM OR CONDI MAY PERTAIN, THE INSURANCE AF 5 SUCH POLICIES. LIMITS SHOWN M	TION OF ANY CONTI	RACT OR OTHER I	DOCUMENT WITH RESPEC	T TO WHICH THIS		
CO	TYPE OF INSURANCE	POLICY NUMBER	POLICY EFFECTIVE DATE (MM/DD/YY)	POLICY EXPIRATION DATE (MM/DD/YY)	LIMO	rs		
7	GENERAL LIABILITY	ACC014568	12/01/98	12/01/99	GENERAL AGGREGATE	\$2,000,000		
	X COMMERCIAL GENERAL LIABILITY				PRODUCTS - COMP/OP AGG	and the second se		
	CLAIMS MADE X OCCUR			1	PERSONAL & ADV INJURY	\$1,000,000		
	OWNER'S & CONTRACTOR'S PROT				EACH OCCURRENCE	\$1,000,000		
		)			FIRE DAMAGE (Any one fire)	s 50,000		
					MED EXP (Any one person)	s 1,000		
					COMBINED SINGLE LIMIT	s		
	ALL OWNED AUTOS				BODILY INJURY (Per person)	s		
	HIRED AUTOS							
	NON-OWNED AUTOS				BODILY INJURY (Per accident)	\$		
					PROPERTY DAMAGE	\$		
	GARAGE LIABILITY				AUTO ONLY - EA ACCIDENT	\$		
	ANY AUTO	2			OTHER THAN AUTO ONLY:	1. 1. 1. 1. 1. 1. 1. 1. 1. 1. 1. 1. 1. 1		
					EACH ACCIDENT	\$		
					AGGREGATE	\$		
	EXCESS LIABILITY				EACH OCCURRENCE	\$		
	UMBRELLA FORM				AGGREGATE	s		
	OTHER THAN UMBRELLA FORM		- 11-			\$		
	WORKERS COMPENSATION AND				WC STATU- TORY LIMITS ER			
	EMPLOYERS' LIABILITY				EL EACH ACCIDENT	\$		
	THE PROPRIETOR/				EL DISEASE-POLICY LIMIT	\$		
	PARTNERS/EXECUTIVE OFFICERS ARE: EXCL				EL DISEASE-EA EMPLOYEE	\$		
	OTHER							
	CRIPTION OF OPERATIONS/LOCATIONS/							
	CITY OF PORTLAND	IS NAMED AS ADDITI	ONAL INSUR	ED RE: S	IGN ON BUILDI	ING		
CE	RTIFICATE HOLDER		CANCELLAT	TION				
	CITY OF PORT	LAND	EXPIRATION	DATE THEREOF, T	ESCRIBED POLICIES BE CAN He issuing company will	ENDEAVOR TO MAIL		
389 CONGRESS STREET PORTLAND, ME 04101			10 DAY	10 DAYS WRITTEN NOTICE TO THE CERTIFICATE HOLDER NAMED TO THE LEFT, BUT FAILURE TO MAIL SUCH NOTICE SHALL IMPOSE NO OBLIGATION OR LIABILITY OF ANY KIND UPON THE COMPANY, ITS AGENTS OR REPRESENTATIVES.				
			BUT FAILUF					
	,	22 I.S., 244 INC	AUTHORIZED	TA RUMPF	Contra the	PR. A.A.I		
AC	ORD 25-S (1/95)		I ROBER	IA KONEF	CACORD C	CORPORATION 19		

ABOONS 51' Pen Plan 6-7 00 21 × 4' NAPP, 0 7517 5 25 GILbent 1/11 18 819 F151 519 4 1000 15 A50 0 NAJ ×1., KG'K 50-COMMENCIAL 7

SCROLL BRACKET BURR ATTACHED TO BLANITE IN EXISTING 5/8" HOLTS WITH SMIELDS &LAGS **Signs** 10 BLITIONWOOD ST SO. PORTLAND, ME 04106 PH: 207-799-1183 EX: 207-799-1324 . POOL · SPIR Copyright OUT THE 70" SIN . 52" **APPI'S** CLIENT NAPPI'S PIZZA 15.4 \$ total LOCATION COMMERCIAL ST. PORTLAND, ME ER. BILLIARDS. D SALES PERSON C. CURRIER DRAWN BY R. BURR SCALE 1"=10" DATE 08/06/99 ACCEPTANCE SIGNATURE CLATE DRAWING NO. 6875 U COLORS SHOWN HERS MAY 7 4311 出会に用語の