

PLUMBING FIXTURE SCHEDULE							
TAG	FIXTURE TYPE	MAX CAPACITY (GPM/F)	WSFU	MIN FIXTURE BRANCH SIZE (IN)	DFU	MIN TRAP ARM (IN)	NOTES
P-1	ADA WATER CLOSET	1.28	2.5	1/2	3.0	3	
P-2	ADA DROP IN SINK	1.5	1.0	1/2	1.0	1-1/4	
P-3	ADA SHOWER	2	2.0	1/2	2.0	2	
P-4	ADA KITCHEN SINK	1.8	1.5	1/2	2.0	1-1/2	
P-5	CHILDREN'S WATER CLOSET	1.28	2.5	1/2	4.0	3	2
P-6	ADA WALL HUNG LAVATORY	1.0	1.0	1/2	2.0	1-1/2	
P-7	KITCHENETTE DOUBLE SINK	1.8	1.5	1/2	3.0	2	2
P-8	FLOOR DRAIN	-	-	1/2	2.0	2	
P-9	ADA DOUBLE SINK	2.2	2.0	1/2	2.0	1-1/2	2
P-10	HOSE BIBB	-	2.5	1/2	-	-	
P-11	CLOTHES WASHER	-	4.0	1/2	3.0	2	1
P-12	MOP SINK	-	3.0	1/2	3.0	2	
P-13	BATHTUB	-	4	1/2	2.0	1-1/2	
P-14	ADA WATER CLOSET	1.1	-	1	4.0	3	
P-15	EXTERIOR HOSE BIBB	5	-	1/2	-	-	

NOTES:
 1. WASHER TO BE PROVIDED BY OWNER
 2. ALTERNATE BID

ELEVATOR SUMP PUMP SCHEDULE												
TAG	LOCATION	SERVICE	TYPE (END SUCTION, HORIZONTAL SPLIT CASE, IN-LINE, ETC.)	DESIGN PUMP DATA		CASING SIZE		MOTOR				NOTES
				CAPACITY (GPM)	HEAD (FT)	SUCTION (IN)	DISCHARGE (IN)	HP	VOLTS	PHASE	HERTZ	
ESP-1	ELEVATOR SHAFT	WATER	SUBMERSIBLE	25	25	N/A	1-1/2	1/2	115	1	60	


NOTES:

DOMESTIC WATER HEATER SCHEDULE															
DESIGNATION	LOCATION	SERVICE	CAPACITY (GAL)	GPH AT 70 DEGREE RISE	BOILER WATER FLOW (GPM)	PRESSURE DROP (FT)	DIMENSIONS (IN)					SHIPPING WEIGHT (LBS)	MANUFACTURER	MODEL	NOTES
							LENGTH	WIDTH	HEIGHT	COMBUSTION AIR	VENT				
WH-1	MECHANICAL ROOM	DHW	119	335	28	12.7	39	27	74	3	3	405	HEAT TRANSFER PRODUCTS	PHOENIX PH199-119	1, 2
WH-2	MECHANICAL ROOM	DHW	119	335	28	12.7	39	27	74	3	3	405	HEAT TRANSFER PRODUCTS	PHOENIX PH199-119	1, 2

NOTES:
 1. PROVIDE CONCENTRIC VENT KIT FOR EACH BOILER.
 2. PROVIDE CONDENSATE NEUTRALIZER FOR EACH BOILER.

PUMP SCHEDULE														
TAG	LOCATION	SERVICE	TYPE	FLOW (GPM)	HEAD (FT)	MOTOR HP	AMP	ELECTRIC			OPERATING WEIGHT	MANUFACTURER	MODEL	NOTES
								VOLTS	PHASE	HERTZ				
HWRP-1	MECH RM	HOT WATER RECIRC	CARTRIDGE CIRCULATOR	7	10	1/25	0.84	120	1	60	5	TACO	008-BC6	1, 2


NOTES:
 1. BRONZE CONSTRUCTION SUITABLE FOR DOMESTIC WATER.
 2. PROVIDE W/ ENOVATIVE AUTOHOT CONTROLLER.

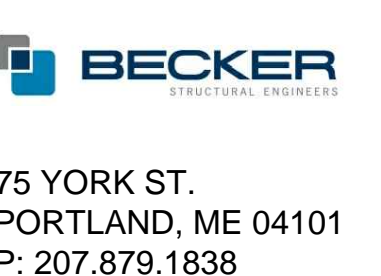

PRICING DOCUMENTS

Project:
 BAYSIDE ANCHOR
 PHDC & Avesta
 81 East Oxford Street
 Portland, ME

Drawing: PLUMBING - SCHEDULES
 Scale: AS NOTED
 Date: 9/1/15
 Drawn by: AEW
 Revised:

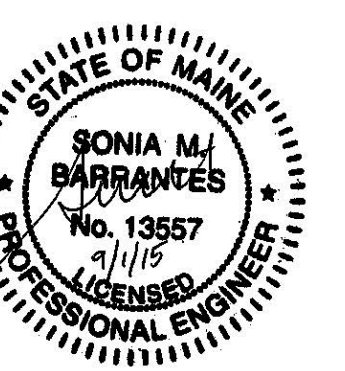

PL600