Location of Construction:	Qwner:	nereitip	Phone: 773-7206	Permit No. 990893
Owner Address: 230 Andernon St. Pt 1992 04101	Lessee/Buyer's Name: Phone: BusinessName:		BusinessName:	PERMIT ISSUED
Contractor Name:	Address:	Phone:		Permit Issued:
Past Use:	Proposed Use:	COST OF WORK \$ 15 sq. ft		AUG 2 0 1999
RACAL	Same	FIRE DEPT. A		Zone: CBL: 030-H-004
Proposed Project Description:		PEDESTRIAN AC	Zoning Approval:	
Sidewalk Sign	Action: A A D	Special Zone or Reviews: □ Shoreland □ Wetland □ Flood Zone		
		Signature:	Date:	
Permit Taken By:	Date Applied For:	August 18, 19	999	□ Site Plan maj □minor □mm □
 Building permits do not include plumbing, se Building permits are void if work is not starte tion may invalidate a building permit and sto 	 ☐ Miscellaneous ☐ Conditional Use ☐ Interpretation ☐ Approved ☐ Denied 			
		,	PERMIT ISSUED WITH REQUIREMENTS	Historic Preservation
I hereby certify that I am the owner of record of th authorized by the owner to make this application if a permit for work described in the application is areas covered by such permit at any reasonable he	as his authorized agent and I agree to s issued, I certify that the code official	conform to all applicable 's authorized representativ	laws of this jurisdiction. In addi e shall have the authority to ente	tion, Denied
S		August 18,	1999	
SIGNATURE OF APPLICANT	ADDRESS:	DATE:	PHONE:	China la
RESPONSIBLE PERSON IN CHARGE OF WOR	K, TITLE		PHONE:	CEO DISTRICT
White-Pe	ermit Desk Green-Assessor's Ca	anary-D.P.W. Pink-Pub	lic File Ivory Card-Inspector	

City of Portland, Maine - Building or Use Permit Application, 389 Congress Street, 04101, Tel: (207) 874-8703, FAX: 874-8716

Sign Permit Pre-Application Attached Single Family Dwellings/Two-Family Dwelling Multi-Family or Commercial Structures and Additions Thereto


In the interest of processing your application in the quickest possible manner, please complete the Information below for a Building or Use Permit.

NOTE**If you or the property owner owes real estate or personal property taxes or user charges on ANY PROPERTY within the City, payment arrangements must be made before permits of any kind are accepted.

Location/Addressof Construction (include Portion of Building):	36 Commencinal St PHd, Me,			
Total Square Footage of Proposed Structure 16 59. Fe	t, Square Footage of Lot 20,600 54 FL,			
Tax Assessor's Chart, Block & Lot Number 36 - H - 11 Owner Chart#030 Block# H 2014-4-7 W	Vellwood Ptushp Telephone#: M73-7206			
2 VU HALLONDA ST	Buyer's Name (If Applicable) Dom A (d) DeFeo Ib Sq. Ft. of Sign Fee Ib Sq. Ft., \$ 28.30			
Proposed Project Description: (Please be as specific as possible) SILE WALK SISH				
Contractor's Name, Address & Telephone Rec'd By				
Current Use: Netrail	Proposed Use: SQ MC			

Date: Signature of applicant: Signage Permit Fee: \$30.00 plus .20 per square foot of signage ems DEPT is DON: Neg CY112 20,600 5g Ft. Manane AUG | 8 1999

	CERTI	FICATE OF INS	URANCE		OPIDLC DONDE-1	DATE (MM/DD/YY) 08/09/99	
Pr	^{DUCER} indle Insurance Agenc Mallett Drive, P.O.		ONLY AND HOLDER. T	CONFERS NO RI HIS CERTIFICAT	ED AS A MATTER OF IN GHTS UPON THE CERT E DOES NOT AMEND, E FORDED BY THE POLIC	FORMATION IFICATE XTEND OR	
Fr	eeport ME 04032			COMPANIES AFFORDING COVERAGE			
20	nda Capen 7-865-3131		COMPANY A	Commercial	Union York Ins	Co	
INSL	RED		COMPANY B				
Don Defeo dba Norumbega Gems		COMPANY C					
P.O Box 405 Portland ME 04112			COMPANY D				
co	VERAGES						
	INDICATED, NOTWITHSTANDING ANY REQ CERTIFICATE MAY BE ISSUED OR MAY PE	OF INSURANCE LISTED BELOW HAVE BEEN 15 UIREMENT, TERM OR CONDITION OF ANY CO RTAIN. THE INSURANCE AFFORDED BY THE POLICIES LIMITS SHOWN MAY HAVE BEEN F	ONTRACT OR OTHER DO POLICIES DESCRIBED HI	CUMENT WITH RESPE EREIN IS SUBJECT TO	CT TO WHICH THIS		
CO L TR	TYPE OF INSURANCE	POLICY NUMBER	POLICY EFFECTIVE DATE (MM/DD/YY)	POLICY EXPIRATION DATE (MM/DD/YY)	LIMITS	3	
	GENERAL LIABILITY				GENERAL AGGREGATE	\$ 2000000	
A		YMR633175	04/13/99	04/13/00	PRODUCTS - COMP/OP AGG	s 2000000	
	CLAIMS MADE OCCUR				PERSONAL & ADV INJURY	\$ 1000000	
	OWNER'S & CONTRACTOR'S PROT				EACH OCCURRENCE	\$ 1000000	
					FIRE DAMAGE (Any one fire)	\$ 100000	
					MED EXP (Any one person)	\$ 5000	
	AUTOMOBILE LIABILITY				COMBINED SINGLE LIMIT	\$	
	ALL OWNED AUTOS				BODILY INJURY (Per person)	\$	
	HIRED AUTOS				2004 10 10 10 10 10 10		
	NON-OWNED AUTOS				BODILY INJURY (Per accident)	\$	
					PROPERTY DAMAGE	\$	
	GARAGE LIABILITY				AUTO ONLY - EA ACCIDENT	5	
	ANY AUTO				OTHER THAN AUTO ONLY		
					EACH ACCIDENT	\$	
				1	AGGREGATE	\$	
	EXCESS LIABILITY				EACH OCCURRENCE	\$	
	UMBRELLA FORM				AGGREGATE	\$	
	OTHER THAN UMBRELLA FORM					\$	
	WORKERS COMPENSATION AND				STATUTORY LIMITS		
	EMPLOYERS' LIABILITY				EACH ACCIDENT	\$	
	THE PROPRIETOR/ INCL				DISEASE - POLICY LIMIT	\$	
	OFFICERS ARE. EXCL				DISEASE - EACH EMPLOYEE	\$	
	OTHER			1			
C	CRIPTION OF OPERATIONS/LOCATIONS/V ty of Portland added	EHICLES/SPECIAL ITEMS as additional insured	l as pertains	to sidewal	k sign		
CE	RTIFICATE HOLDER	CITYC		Y OF THE ABOVE DESC DATE THEREOF, THE 'S WRITTEN NOTICE T	CRIBED POLICIES BE CANCELI ISSUING COMPANY WILL ENDI O THE CERTIFICATE HOLDER N CE SHALL IMPOSE NO OBLIGA	EAVOR TO MAIL NAMED TO THE LEFT,	
The City of Portland Congress St			OF ANY KIN	BUT FAILURE TO MAIL SUCH NOTICE SHALL IMPOSE NO OBLIGATION OR LIABILITY OF ANY KIND UPON THE COMPANY ITS AGENTS OR REPRESENTATIVES.			
	Portland ME 041	.01	Linda Ca	7	la Lapen	ORPORATION 1993	
AC	ORD 25-S (3/93)				eyicenib e		

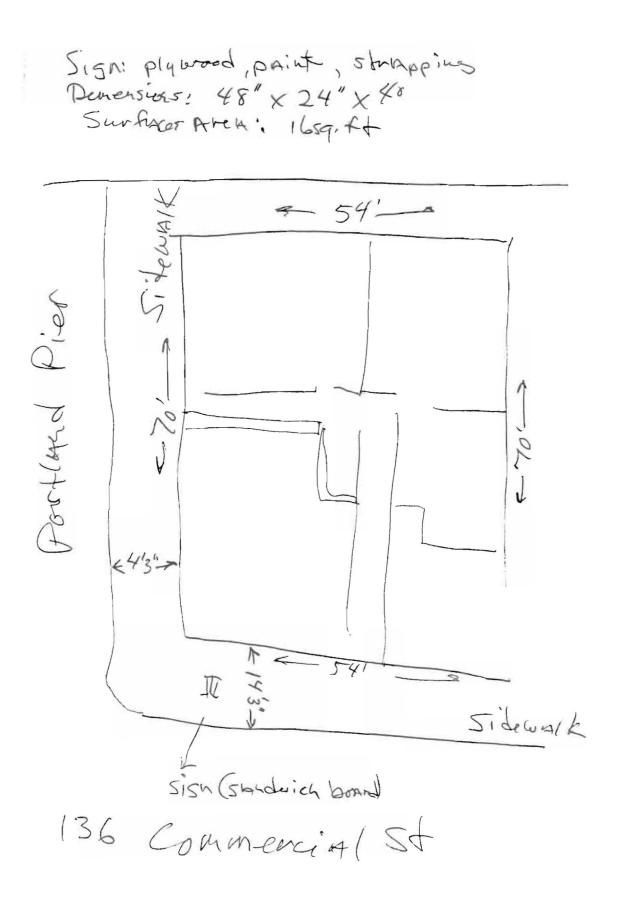

,	BUILDING PERMIT REPORT
DA	TE: 18 Aug. 99 ADDRESS: 136 Commoncial St CBL: 030-H-004
REA	ASON FOR PERMIT: SIde walk Sign
	LDING OWNER: Wellwood ParTnorship-
PEF	AMIT APPLICANT: /Contractor
USE	GROUP SIDEWALK SIGM CONSTRUCTION TYPE
	City's Adopted Building Code (The BOCA National Building Code/1996 with City Amendments) City's Adopted Mechanical Code (The BOCA National Mechanical Code/1993)
	CONDITION(S) OF APPROVAL
TL :-	\times
1 115	permit is being issued with the understanding that the following conditions are met: $\frac{1}{\sqrt{34 + 35}}$
App	roved with the following conditions:
V_1	This permit does not excuse the applicant from meeting applicable State and Federal rules and laws.
<u></u> 2.	Before concrete for foundation is placed, approvals from the Development Review Coordinator and Inspection Services must be obtained.
	(A 24 hour notice is required prior to inspection)
3.	Foundation drain shall be placed around the perimeter of a foundation that consists of gravel or crushed stone containing not more than 10 percent material that passes through a No. 4 sieve. The drain shall extend a minimum of 12 inches beyond the outside edge of the footing. The thickness shall be such that the bottom of the drain is not higher than the bottom of the base under the floor, and that the top of the drain is not less than 6 inches above the top of the footing. The top of the drain shall be covered with an approved filter membrane material. Where a drain tile or perforated pipe is used, the invert of the pipe or tile shall not be higher than the floor elevation. The top of joints or top of perforations shall be protected with an approved filter membrane material. The pipe or tile shall be placed on not less than 2" of gravel or crushed stone, and shall be covered with not less than 6" of the same material. Section 1813.5.2
4.	Foundations anchors shall be a minimum of 1/2" in diameter, 7" into the foundation wall, minimum of 12" from corners of foundation and a maximum 6' o.c. between bolts. (Section 2305.17)
5.	Waterproofing and dampproofing shall be done in accordance with Section 1813.0 of the building code.
6.	Precaution must be taken to protect concrete from freezing. Section 1908.0
7.	It is strongly recommended that a registered land surveyor check all foundation forms before concrete is placed. This is done to verify that the proper setbacks are maintained.
8.	Private garages located <u>beneath habitable rooms</u> in occupancies in Use Group R-1, R-2, R-3 or I-1 shall be separated from adjacent interior spaces by fire partitions and floor/ceiling assembly which are constructed with not less than 1-hour fire resisting rating. <u>Private garages attached side-by-side to rooms</u> in the above occupancies shall be completely separated from the interior spaces and the attic area by means of ½ inch gypsum board or the equivalent applied to the garage means of ½ inch gypsum board or the equivalent applied to the garage side. (Chapter 4, Section 407.0 of the BOCA/1996)
9.	All chimneys and vents shall be installed and maintained as per Chapter 12 of the City's Mechanical Code. (The BOCA National Mechanical Code/1993). Chapter 12 & NFPA 211
10	Sound transmission control in residential building shall be done in accordance with Chapter 12, Section 1214.0 of the City's Building Code.
ΙI.	Guardrails & Handrails: A guardrail system is a system of building components located near the open sides of elevated walking surfaces for the purpose of minimizing the possibility of an accidental fall from the walking surface to the lower level. Minimum height all Use Groups 42", except Use Group R which is 36". In occupancies in Use Group A, B, H-4, I-1, I-2, M and R and public garages and open parking structures, open guards shall have balusters or be of solid material such that a sphere with a diameter of 4" cannot pass through any opening. Guards shall not have an ornamental pattern that would provide a ladder effect. (Handrails shall be a minimum of 3e4" but not more than 38". Use Group R-3 shall not be less than 30", but not more than 38".) Handrail grip size shall have a circular cross section with an outside diameter of at least 1 ¼" and not greater than 2". (Sections 1021 & 1022.0) - Handrails shall be on both sides of stairway. (Section 1014.7)
12.	Headroom in habitable space is a minimum of 7'6". (Section 1204.0)
12.	Stair construction in Use Group R-3 & R-4 is a minimum of 10" tread and 7 %" maximum rise. All other Use Group minimum 11"

- tread, 7" maximum rise. (Section 1014.0)
- 14. The minimum headroom in all parts of a stairway shall not be less than 80 inches. (6'8") 1014.4
- 15. Every sleeping room below the fourth story in buildings of Use Groups R and 1-1 shall have at least one operable window or exterior door approved for emergency egress or rescue. The units must be operable from the inside without the use of special knowledge or separate tools. Where windows are provided as means of ceress or rescue they shall have a sill height not more than 44 inches (1118mm) above the floor. All egress or rescue windows from sleeping rooms shall have a minimum net clear opening height dimension of 24 inches (610mm). The minimum net clear opening width dimension shall be 20 inches (508mm), and a minimum net clear opening of 5.7 sq. ft. (Section 1018.6)
- 16. Each apartment shall have access to two (2) separate, remote and approved means of egress. A single exit is acceptable when it exits directly from the apartment to the building exterior with no communications to other apartment units. (Section 1010.1)

- 17. All vertical openings shall be enclosed with construction having a fire rating of at least one (1) hour, including fire doors with self closer's. (Over 3 stories in height requirements for fire rating is two (2) hours.) (Section 710.0)
- 18. The boiler shall be protected by enclosing with (1)hour fire rated construction including fire doors and ceiling, or by providing automatic extinguishment. (Table 302.1.1)
- 19. All single and multiple station smoke detectors shall be of an approved type and shall be installed in accordance with the provisions of the City's Building Code Chapter 9, Section 920.3.2 (BOCA National Building Code/1996), and NFPA 101 Chapter 18 & 19. (Smoke detectors shall be installed and maintained at the following locations):
 - In the immediate vicinity of bedrooms
 - In all bedrooms
 - In each story within a dwelling unit, including basements

In addition to the required AC primary power source, required smoke detectors in occupancies in Use Groups R-2, R-3 and J-1 shall receive power from a battery when the AC primary power source is interrupted. (Interconnection is required) Section 920.3.2.

- 20. A portable fire extinguisher shall be located as per NFPA #10. They shall bear the label of an approved agency and be of an approved type. (Section 921.0)
- 21. The Fire Alarm System shall maintained to NFPA #72 Standard.
- 22. The Sprinkler System shall maintained to NFPA #13 Standard.
- 23. All exit signs, lights and means of egress lighting shall be done in accordance with Chapter 10 Section & Subsections 1023.0 & 1024.0 of the City's Building Code. (The BOCA National Building Code/1996)
- 24. Section 25-135 of the Municipal Code for the City of Portland states, "No person or utility shall be granted a permit to excavate or open any street or sidewalk from the time of November 15 of each year to April 15 of the following year".
- 25. The builder of a facility to which Section 4594-C of the Maine State Human Rights Act Title 5 MRSA refers, shall obtain a certification from a design professional that the plans commencing construction of the facility, the builder shall submit the certification the Division of Inspection Services.
- 26. Ventilation shall meet the requirements of Chapter 12 Sections 1210.0 of the City's Building Code. (Crawl spaces & attics).
- 27. All electrical, plumbing and HVAC permits must be obtained by a Master Licensed holders of their trade. No closing in of walls until all electrical (min.72 hours notice) and plumbing inspections have been done.
- 28. All requirements must be met before a final Certificate of Occupancy is issued.
- 29. All building elements shall meet the fastening schedule as per Table 2305.2 of the City's Building Code (the BOCA National Building Code/1996).
- Ventilation of spaces within a building shall be done in accordance with the City's Mechanical Code (The BOCA National Mechanical Code/1993). (Chapter M-16)
- 31. Please read and implement the attached Land Use Zoning report requirements.
- 32. Boring. cutting and notching shall be done in accordance with Sections 2305.4.4, 2305.5.1 and 2305.5.3 of the City's Building Code.
- 33. Glass and glazing shall meet the requirements of Chapter 24 of the building code.
- All signage, shall be done in accordance with Section 3102.0 signs of the City's Building Code, (The BOCA National Building Code

1996) Sidewalk Signage Shall Comply with The Y rules on such Signs. 35. 36. 37. 38. Hoffses, Building Inspector Lt. McDougall, PFD Marge Schmuckal, Zoning Administrator

PSH 7/24/99

**On the basis of plans submitted and conditions placed on these plans any deviations shall require a separate approval.