


Door Schedule										
Mark	Size			type / material	frame	hardware	weather stripping	threshold	closer	comments
	width	height	thickness							
101	existing 3'-0"	7'-0"	1 3/4"	Alum storefront	Alum	Sargeant AD 8500 Exit Rim Devise and surface mt strike (UL Panic Rated) with Keyway and dogging	Exist	Exist	Exist	Replace exist cylinder lock & infill core with blank.
102	existing 3'-0"	7'-0"	1 3/4"	Alum storefront	Alum	Remove existing key cylinder and infill cores	Exist	Exist	Exist	Replace exist cylinder lock & nstall cover plates.
103	6'-0" (pair 3'-0")	6--8"	1 3/4"	SC Wood Ptd w/ tempered lites	HM	Push plate/pull handle each door. (no latch)	none	none	both doors	
104	3'-0"	7'-0"	1 3/4"	Alum storefront	Alum	Keyed Cylinder outside and thumb latch inside.	yes	yes	yes	
105	3'-0"	6--8"	1 3/4"	SC Wood Ptd	HM	Push plate/pull handle (no latch)	none	none	yes	
106	3'-0"	6--8"	1 3/4"	SC Wood Ptd	HM	Privacy Lever cylinder lockset	none	none	none	
107	3'-0"	6--8"	1 3/4"	SC Wood Ptd	HM	Privacy Lever cylinder lockset	none	none	none	
108	3'-0"	6--8"	1 3/4"	SC Wood Ptd	HM	Privacy Lever cylinder lockset	none	none	none	
109	3'-0"	6--8"	1 3/4"	Metal	Metal	Sargeant 8500 Exit Rim Devise and surface mt strike (UL Panic Rated) with Keyway and NO dogging	Exist	Exist	Exist	Replace existing door and frame with opp hand door and new exit devise. 1 hr Fire Rated door and frame.
110	3'-0"	6--8"	1 3/4"	SC Wood Ptd	HM	Office Function Lever cylinder lockset	none	none	none	
111	3'-0"	6--8"	1 3/4"	SC Wood Ptd	HM	Office Function Lever cylinder lockset	none	none	none	
112	3'-0"	6--8"	1 3/4"	SC Wood Ptd	HM	Privacy Lever cylinder lockset	none	none	none	
113	3'-0"	6--8"	1 3/4"	SC Wood Ptd	HM	Privacy Lever cylinder lockset	none	none	none	
114	Pair 2'-0"	6--8"	1 3/4"	SC Wood Ptd	HM	Each Door - pull handle and ball catch mounted at head	none	none	none	
115	3'-0"	6--8"	1 3/4"	SC Wood Ptd	HM	Passage lever cylinder	none	none	yes	

Note: US 10B finish on all Hardware except Alum storefronts

1 1/2 pair of Hinges per door (typ).

Refer Plan for door swing

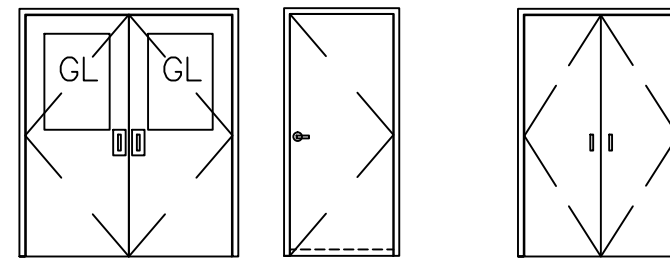


103 105-113 Sim. 114

Doors - nts

Door notes:

- Refer to plan for door swing.
- Refer Window schedule for storefront door.

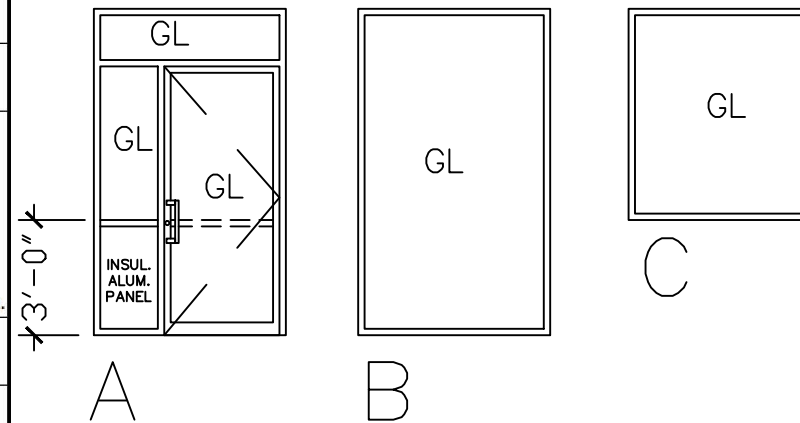

Windows - nts

Window notes:.

- Refer door schedule for additional storefront door information.
- Storefront to be Kawneer insulated Trifab 450 OAE system with 1" insulated glazing. Use twmpered glazings as required.

309 Marginal Way Schedules

10/10/12 rev 10/29/12 rev 1/14/13 (entire sht)