. City of Portland, Maine - Building or Use Permit Application 389 Congress Street, 04101, Tel: (207) 874-8703, FAX: 874-8716 Location of Construction: Owner: Phone: Permit No: 9 Portland Pier Steve McDuffie work 773-7206 Owner Address: Lessee/Buyer's Name: Phone: BusinessName: Wellwood Parnership, 230 Anderson ST, Portland, 04101 Permit Issued: Phone: Contractor Name: Address: COST OF WORK: Proposed Use: PERMIT FEE: Past Use: \$3,000.00 \$42.00 FIRE DEPT. Approved INSPECTION: Commercial Same Use Group: 7 Type: 1 ☐ Denied CBL: 030-н 011 Signature: Proposed Project Description: PEDESTRIAN ACTIVITIES DISTRICT (P.A.D.) Action: Approved П New entry doors, new fire exit & install 2 particians Special Zone or Approved with Conditions: interior - 4th front □ Shoreland Denied □Wetland ☐ Flood Zone Signature: Date: □ Subdivision ☐ Site Plan maj ☐minor ☐mm ☐ Permit Taken By: Date Applied For: Gay1e August 21, 2000 GG **Zoning Appeal** □ Variance This permit application does not preclude the Applicant(s) from meeting applicable State and Federal rules. ☐ Miscellaneous Building permits do not include plumbing, septic or electrical work. ☐ Conditional Use PERMIT ISSUED Building permits are void if work is not started within six (6) months of the date of issuance. False informa-□ Interpretation 3. WITH REQUIREMENTS ☐ Approved tion may invalidate a building permit and stop all work... □ Denied Historic Preservation □ Not in District or Landmark *** Call Mia 775-6763 (Accent Travel) ☐ Does Not Require Review ☐ Requires Review CERTIFICATION Devoda ☐ Approved with Conditions I hereby certify that I am the owner of record of the named property, or that the proposed work is authorized by the owner of record and that I have been □ Denied authorized by the owner to make this application as his authorized agent and I agree to conform to all applicable laws of this jurisdiction. In addition. if a permit for work described in the application is issued, I certify that the code official's authorized representative shall have the authority to enter all Date: areas covered by such permit at any reasonable hour to enforce the provisions of the code(s) applicable to such permit August 21, 2000 ADDRESS: DATE: PHONE: SIGNATURE OF APPLICANT RESPONSIBLE PERSON IN CHARGE OF WORK, TITLE PHONE: **CEO DISTRICT**

White-Permit Desk Green-Assessor's Canary-D.P.W. Pink-Public File Ivory Card-Inspector

D	ATE: 8/21/00 ADDRESS: 9 B PORTLYND PIER CBL: 30-H-011
RI	EASON FOR PERMIT: NEW ENTRY DOORS, NEW FIRE EXIT W/ Z PARTITION WALLS
	UILDING OWNER: STEVE McDUFFIE
PF	ERMIT APPLICANT: /CONTRACTOR /
	SE GROUP: B CONSTRUCTION TYPE: 1 CONSTRUCTION COST: 3,000 PERMIT FEES: 42
Th	ne City's Adopted Building Code (The BOCA National Building code/1999 with City Amendments) ne City's Adopted Mechanical Code (The BOCA National Mechanical Code/1993)
	CONDITION(S) OF APPROVAL
	his permit is being issued with the understanding that the following conditions Shall be met: $\frac{41}{1111111111111111111111111111111111$
<i>3</i> .	Foundation drain shall be placed around the perimeter of a foundation that consists of gravel or crushed stone containing not more than 10 percent material that passes through a No. 4 sieve. The drain shall extend a minimum of 12 inches beyond the outside edge of the footing. The thickness shall be such that the bottom of the drain is not higher than the bottom of the base under the floor, and that the top of the drain is not
5. 6. 7. 8.	It is strongly recommended that a registered land surveyor check all foundation forms before concrete is placed. This is done to verify that the proper setbacks are maintained. Private garages located beneath habitable rooms in occupancies in Use Group R-1, R-2, R-3 or I-1 shall be separated from adjacent interior spaces by fire partitions and floor/ceiling assembly which are constructed with not less than 1-hour fire resisting rating. Private garages attache side-by-side to rooms in the above occupancies shall be completely separated from the interior spaces and the attic area by means of ½ inch gypsum board or the equivalent applied to the garage side. (Chapter 4, Section 407.0 of the BOCA/1999) All chimneys and vents shall be installed and maintained as per Chapter 12 of the City's Mechanical Code. (The BOCA National Mechanical Code/1993). Chapter 12 & NFPA 211 Sound transmission control in residential building shall be done in accordance with Chapter 12, Section 1214.0 of the City's Building Code. Guardrails & Handrails: A guardrail system is a system of building components located near the open sides of elevated walking surfaces for the purpose of minimizing the possibility of an accidental fall from the walking surface to the lower level. Minimum height all Use Groups 42", In occupancies in Use Group A,B.H-4, I-1, I-2, M and R and public garages and open parking structures, open guards shall have balusters or be of solid material such that a sphere with a diameter of 4" cannot pass through any opening. Guards shall not have an ornamental pattern that
5. 6. 7. 8. 9. 10. 11.	tile or perforated pipe is used, the invert of the pipe or tile shall not be higher than the floor elevation. The top of joints or top of perforations shall be protected with an approved filter membrane material. The pipe or tile shall be placed on not less than 2" of gravel or crushed stone, an shall be covered with not less than 6" of the same material. Section 1813.5.2 Foundations anchors shall be a minimum of 'X" in diameter, 7" into the foundation wall, minimum of 12" from corners of foundation and a maximum 6' O.C. between bolts. Section 2305.17 Waterproofing and dampproofing shall be done in accordance with Section 1813.0 of the building code. Precaution must be taken to protect concrete from freezing. Section 1908.0 It is strongly recommended that a registered land surveyor check all foundation forms before concrete is placed. This is done to verify that the proper setbacks are maintained. Private garages located beneath habitable rooms in occupancies in Use Group R-1, R-2, R-3 or I-1 shall be separated from adjacent interior spaces by fire partitions and floor/ceiling assembly which are constructed with not less than 1-hour fire resisting rating. Private garages attache side-by-side to rooms in the above occupancies shall be completely separated from the interior spaces and the attic area by means of '& inch gypsum board or the equivalent applied to the garage side. (Chapter 4, Section 407.0 of the BOCA/1999) All chimneys and vents shall be installed and maintained as per Chapter 12 of the City's Mechanical Code. (The BOCA National Mechanical Code/1993). Chapter 12 & NFPA 211 Sound transmission control in residential building shall be done in accordance with Chapter 12, Section 1214.0 of the City's Building Code. Guardrails & Handrails: A guardrail system is a system of building components located near the open sides of elevated walking surfaces for the purpose of minimizing the possibility of an accidental fall from the walking surface to the lewer level. Minimum height all Use Groups 42", In occupanc
5. 6. 7. 8. 9. 10.	tile or perforated pipe is used, the invert of the pipe or tile shall not be higher than the floor elevation. The top of joints or top of perforations shall be protected with an approved filter membrane material. The pipe or tile shall be placed on not less than 2" of gravel or crushed stone, an shall be covered with not less than 6" of the same material. Section 1813.5.2 Foundations anchors shall be a minimum of ½" in diameter, 7" into the foundation wall, minimum of 12" from corners of foundation and a maximum 6' O.C. between bolts. Section 2305.17 Waterproofing and dampproofing shall be done in accordance with Section 1813.0 of the building code. Precaution must be taken to protect concrete from freezing. Section 1908.0 It is strongly recommended that a registered land surveyor check all foundation forms before concrete is placed. This is done to verify that the proper setbacks are maintained. Private garages located beneath habitable rooms in occupancies in Use Group R-1, R-2, R-3 or I-1 shall be separated from adjacent interior spaces by fire partitions and floor/ceiling assembly which are constructed with not less than 1-hour fire resisting rating. Private garages attaches side-by-side to rooms in the above occupancies shall be completely separated from the interior spaces and the attic area by means of ½ inch gypsum board or the equivalent applied to the garage side. (Chapter 4, Section 407.0 of the BOCA/1999) All chimneys and vents shall be installed and maintained as per Chapter 12 of the City's Mechanical Code. (The BOCA National Mechanical Code/1993). Chapter 12 & NFPA 211 Sound transmission control in residential building shall be done in accordance with Chapter 12, Section 1214.0 of the City's Building Code. Guardrails & Handrails: A guardrail system is a system of building components located near the open sides of elevated walking surfaces for the purpose of minimizing the possibility of an accidental fall from the walking surface to the lower level. Minimum height all Use Groups 42", In oc
5. 6. 7. 8. 9. 10. 13. 14. 15.	tile or perforated pipe is used, the invert of the pipe or tile shall not be higher than the floor elevation. The top of joints or top of perforations shall be protected with an approved filter membrane material. The pipe or tile shall be placed on not less than 2" of gravel or crushed stone, an shall be covered with not less than 6" of the same material. Section 1813.5.2 Foundations anchors shall be a minimum of ½" in diameter, 7" into the foundation wall, minimum of 12" from corners of foundation and a maximum 6' O.C. between bolts. Section 2305.17 Waterproofing and dampproofing shall be done in accordance with Section 1813.0 of the building code. Precaution must be taken to protect concrete from freezing. Section 1908.0 It is strongly recommended that a registered land surveyor check all foundation forms before concrete is placed. This is done to verify that the proper setbacks are maintained. Private garages located beneath habitable rooms in occupancies in Use Group R-1, R-2, R-3 or I-1 shall be separated from adjacent interior spaces by fire partitions and floor/ceiling assembly which are constructed with not less than 1-hour fire resisting rating. Private garages statche side-by-side to rooms in the above occupancies shall be completely separated from the interior spaces and the attic area by means of ½ inch gypsum board or the equivalent applied to the garage side. (Chapter 4, Section 407.0 of the BOCA/1999) All chimneys and vents shall be installed and maintained as per Chapter 12 of the City's Mechanical Code. (The BOCA National Mechanical Code/1993). Chapter 12 & NFPA 211 Sound transmission control in residential building shall be done in accordance with Chapter 12, Section 1214.0 of the City's Building Code. (Chapter 4), 1-1, 1-2, M and R and public garages and open parking structures, open guards shall have balusters or be of solid material such that a sphere with a diameter of 4" cannot pass through any opening. Guards shall not have an ornamental pattern that would provide a ladder effect.
5. 6. 7. 8. 9. 10. 11. 15. 16.	tile or perforated pipe is used, the invert of the pipe or tile shall not be higher than the floor elevation. The top of joints or top of perforations shall be protected with an approved filter membrane material. The pipe or tile shall be placed on not less than 2" of gravel or crushed stone, an shall be covered with not less than 6" of the same material. Section 1813.5.2 Foundations anchors shall be a minimum of 1" in diameter, 7" into the foundation wall, minimum of 12" from corners of foundation and a maximum of 0.C. between bolts. Section 2305.17 Waterproofing and dampproofing shall be done in accordance with Section 1813.0 of the building code. Precaution must be taken to protect concrete from freezing. Section 1908.0 It is strongly recommended that a registered land surveyor check all foundation forms before concrete is placed. This is done to verify that the proper setbacks are maintained. Private garages located beneath habitable rooms in occupancies in Use Group R-1, R-2, R-3 or I-1 shall be separated from adjacent interior spaces by fire partitions and floor/ceiling assembly which are constructed with not less than 1-hour fire resisting rating. Private garages attache side-by-side to rooms in the above occupancies shall be completely separated from the interior spaces and the attic area by means of ½ inch gypsum board or the equivalent applied to the garage side. (Chapter 4, Section 407.0 of the BOCA 1999) All chimneys and vents shall be installed and maintained as per Chapter 12 of the City's Mechanical Code. (The BOCA National Mechanical Code/1993). Chapter 12 & NFPA 211 Sound transmission control in residential building shall be done in accordance with Chapter 12, Section 1214.0 of the City's Building Code. Guardrails & Handrails: A guardrail system is a system of building components located near the open sides of elevated walking surfaces for the purpose of minimizing the possibility of an accidental fall from the walking surface to the lower level. Minimum height all Use Groups 42", In occ
5. 6. 7. 8. 9. 10. 11. 15. 16. 17.	tile or perforated pipe is used, the invert of the pipe or tile shall not be higher than the floor elevation. The top of joints or top of perforations shall be protected with an approved filter membrane material. The pipe or tile shall be placed on not less than 2" of gravel or crushed stone, an shall be covered with not less than 6" of the same material. Section 1813.5.2 Foundations anchors shall be a minimum of ½" in diameter, 7" into the foundation wall, minimum of 12" from corners of foundation and a maximum of 0.C. Detween bolts. Section 2305.17 Waterproofing and dampproofing shall be done in accordance with Section 1813.0 of the building code. Precaution must be taken to protect concrete from freezing. Section 1908.0 It is strongly recommended that a registered land surveyor check all foundation forms before concrete is placed. This is done to verify that the proper setbacks are maintained. Private garages located beneath habitable rooms in occupancies in Use Group R-1, R-2, R-3 or I-1 shall be separated from adjacent interior spaces by fire partitions and floor/ceiling assembly which are constructed with not less than 1-hour fire resisting rating. Private garages attache side-by-side to rooms in the above occupancies shall be completely separated from the interior spaces and the attic area by means of ½ inch gypsum board or the equivalent applied to the garage side. (Chapter 4, Section 407.0 of the BOCA/1999) All chimneys and vents shall be installed and maintained as per Chapter 12 of the City's Mechanical Code. (The BOCA National Mechanical Code/1993). Chapter 12 & NFPA 211 Sound transmission control in residential building shall be done in accordance with Chapter 12, Section 1214.0 of the City's Building Code. Guardrails & Handrails: A guardrail system is a system of building components located near the open sides of elevated walking surfaces for the purpose of minimizing the possibility of an accidential fall from the walking surface to the lower level. Minimum height all Use Groups 42", In o

19. All single and multiple station smoke detectors shall be of an approved type and shall be installed in accordance with the provisions of the City's Building Code Chapter 9, Section 920.3.2 (BOCA National Building Code/1999), and NFPA 101 Chapter 18 & 19. (Smoke detectors shall be installed and maintained at the following locations): In the immediate vicinity of bedrooms In all bedrooms In each story within a dwelling unit, including basements (20) A portable fire extinguisher shall be located as per NFPA #10. They shall bear the label of an approved agency and be of an approved type. (Section 921.0) The Fire Alarm System shall maintained to NFPA #72 Standard. The Sprinkler System shall installed and maintained to NFPA #13 Standard. All exit signs, lights and means of egress lighting shall be done in accordance with Chapter 10 Section & Subsections 1023.0 & 1024.0 of the City's Building Code. (The BOCA National Building Code/1999) 24. Section 25 - 135 of the Municipal Code for the City of Portland states, "No person or utility shall be granted a permit to excavate or open any street or sidewalk from the time of November 15 of each year to April 15 of the following year". 25. The builder of a facility to which Section 4594-C of the Maine State Human Rights Act Title 5 MRSA refers, shall obtain a certification from a design professional that the plans commencing construction of the facility, the builder shall submit the certification the Division of Inspection Ventilation shall meet the requirements of Chapter 12 Sections 1210.0 of the City's Building Code. (Crawl spaces & attics). All electrical, plumbing and HVAC permits must be obtained by a Master Licensed holders of their trade. No closing in of walls until all electrical (min. 72 hours notice) and plumbing inspections have been done. [28] All requirements must be met before a final Certificate of Occupancy is issued. All building elements shall meet the fastening schedule as per Table 2305.2 of the City's Building Code (The BOCA National Building Code/1999). 30. Ventilation of spaces within a building shall be done in accordance with the City's Mechanical code (The BOCA National Mechanical Code/1993). (Chapter M-16) 31. Please read and implement the attached Land Use Zoning report requirements. 32. Boring, cutting and notching shall be done in accordance with Sections 2305.3, 2305.3.1, 2305.4.4 and 2305.5.1 of the City's Building Code. 33. Bridging shall comply with Section 2305.16. 34. Glass and glazing shall meet the requirements of Chapter 24 of the building code. (Safety Glazing Section 2405.0) 35) All signage, shall be done in accordance with Section 3102.0 signs of the City's Building Code, (The BOCA National Building Code/1999).

HILL WIRK SHALL BE COMPLETED IN ACCORDANCE W/ 1999 BOCA STANDARDS. AND Requirements P. Samuel Hoffses, Building Inspector Lt. McDougall, PFD Marge Schmuckal, Zoning Administrator -KUMID **This Permit is herewith issued,on the basis of plans submitted and conditions placed the plans, any deviations shall require a separate approval. ---THIS PERMIT HAS BEEN ISSUED WITH THE UNDERSTANDING THAT ALL THE CONDITIONS OF THE APPROVAL SHALL BE COMPLETED. THEREFORE, BEFORE THE WORK IS COMPLETED A REVISED PLAN OR STATEMENT FROM THE PERMIT HOLDER SHALL BE SUBMITTED TO THIS OFFICE SHOWING OR EXPLAINING THAT THE CONDITIONS HAVE BEEN MET. IF THIS REQUIREMENT IS NOT RECEIVED YOUR CERTIFICATE OF OCCUPANCY SHALL BE WITHHELD. **** Certificate of Occupancy Fees: \$50.00 each ***** All PLANS THAT REQUIRE A PROFESSIONAL DESIGN'S SEAL,(AS PER SECTION 114.0 OF THE BUILDING CODE) SHALL ALSO BE PRESENTED TO THIS DIVISION ON AUTO CAD LT. 2000 OR REQUIVALENT.

THIS IS NOT A PERMIT/CONSTRUCTION CANNOT COMMENCE UNTIL THE PERMIT IS ISSUED

Building or Use Permit Pre-Application

Attached Single Family Dwellings/Two-Family Dwelling

Multi-Family or Commercial Structures and Additions Thereto

In the interest of processing your application in the quickest possible manner, please complete the Information below for a Building or Use Permit.

NOTE**If you or the property owner owes real estate or personal property taxes or user charges on ANY PROPERTY within the City, payment arrangements must be made before permits of any kind are accepted.

					<u> </u>	POPTLAN	d Tier
Location'Add	dressof Construction (i	nclude Portion of Build	ling): CARROU	BLOCK BUILDI	N4 -736 €	OMM ELCH	OL ST.
				Square Footage of Lot) 50 F	·
Tax Assessor	's Chart, Block & Lot O Block#	Number		eve m'dyffie		Telephone:: W - 2c	1-773-7206
7HE L 230 A	NELLWOOD MY WELLWOOD MY INDERSON, ST.	RTNBRSHIP .	LESSON Buyer's	Name (If Applicable) M SW TRANGE 77567	S	ast Of Work:	F∞ \$ 42.00
SPACE	ica Description:(Pleas : ADD TW PANTITIONS, G	O NEW ENTR	y DOORS, OF	L TO SUBLET A NE NEW FIRE E	XIT DOOR,	PLUS IN	
Contractor's N	iame, Address & Telep	hone SELF	802-872 ACLEUT TI	-5507 ATTN: JT MUGL - PD. 753 C	MUGS STAPLE UILLISTON: L	17 05495)	Rec'd By
Current Use:	FILL STON	AL OFFICE		Proposed Use: SAW	_		·
•HVAC(lation and Air Co g with you applicat 1) ACopy o	nditioning) instal ion: f Your Deed or P	ational Electrical Cod lation must comply w urchase and Sale Agr ction Contract, if ava n/Site Plan	ith the 1993 I eement ** llable Su	BOCA Mechan IF Ava I Homil-I	ical Code. Ilabl <i>a al</i> s Plans on
∕linor or Maj	jor site plan reviev	wwill be required t		sed projects. The attac	hed AL	DOBE OV	CAD For
hecklist outl	ines the minimum	standards for a sit	-	• • • •		PE	
	1. 24.		4) Buildi				
complete se	et of construction	drawings showing	all of the following	s must be designed by elements of constructi	on: ///		onal.
		-	_ 2 i 1 '10' 12	s w/railings, and access g ny specialized equipment of work that may require	• • • • • • • • • • • • • • • • • • • •	49 /0	7
Elec c qu	ctrical and plumbi ipment, HVAC ec	ing layout. Mechan Juipment (air hand	ical drawings for a ling) or other types	ny specialized equipme of work that may requ	ent such as furn ire special revi	ew most being	luded
	at I am the Owner of r	ecord of the named pro-	env. or that the propos	ation ed work is authorized by the	owner of record an	ed that I have been	symbolized by the

owner to make this application as his her authorized agent. I agree to conform to all applicable laws of this jurisdiction. In addition, if a permit for work exceeded in this application is issued, I certify that the Code Official's authorized representative shall have the authority to enter all areas covered by this permit at any reasonable hour to enforce the provisions of the codes applicable to this permit.

Signature of applicants

Whit is a permit for work exceeded in this applicable in this permit at any reasonable hour to enforce the provisions of the codes applicable to this permit.

Date:

Building Permit Fee: \$30.00 for the 1st \$1000.cost plus \$6.00 per \$1,000.00 construction cost thereafter.


Additional Site review and related fees are attached on a separate addendum

× . . .

.

De la companya de la

Harbor View

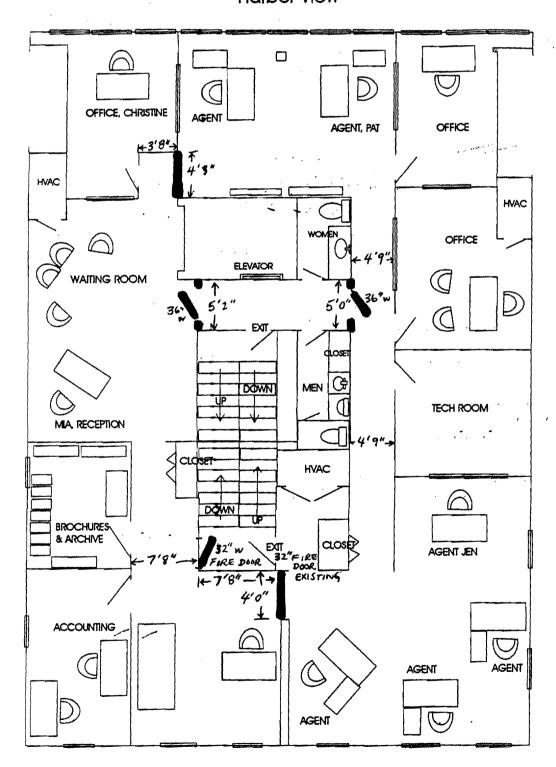

NEW WORK SHOWN IN BOLD

Z ENTRY DOORS - 36" W

I FIRE DOOR - 32" W

Z PARTIMOUS - 248" W K 86" H City View

• *

oNear

COMMENTS

9-13-00 fre-con co/ Jim - Need to be advised by MAC as to The Fire separation requirements or The Access to The Stairwell and separating one business into 2 spaces. 82 9-22-00 Met w/ Mia At Accent Travel to assess Egress routes - still need to verify
COPILISOMENTS by To Access to The Stairwell and Something one business into > smear VB
9-22-00 Met 11 Mis at Arcount Travel to access source pourtes - ctill and to inquis
I what
w/MAZ
9-25-00 reviewed Jams w/ MTC, because of same use group The 15 toot interconnecting
9-25-00 reviewed Dans w/ MAZ, because of same use group The 15' Foot interconnecting hall does not need here doors since There is here protection around elevator and
egness stairwell 823
Inspection Record
Type Date
Foundation:
Framing:
Final:
Other: