

30" Dual Fuel Range

With Wolf's dual fuel range you have state-of-the-art cooking expertise to meet the discriminating consumers' needs. The dual fuel range offers standard dualstacked sealed surface burners. The large electric oven features ten cooking modes and the Wolf exclusive dual convection system that delivers even temperature and airflow throughout. The dual fuel range is available in natural or LP gas.



### FEATURES

- Stainless steel exterior finish with island trim included.
- Red, black or stainless steel control knobs (specify with range).
- Stainless steel bezels surround all knobs.
- Dual-stacked, sealed burners, all with simmer capabilities and automatic reignition at all settings.
- Melt feature on 9,200 Btu burner.
- Ten cooking modes, temperature probe and self-clean features.
- Porcelain-coated cast iron continuous top grates.
- Pivoting hidden touch control panel.
- Coaxial temperature displaying oven selector knob.
- Cobalt blue porcelain oven interior with halogen lighting.
- Three adjustable oven racks; one fullextension easy glide, one full-extension door glide and one standard.
- Hidden bake element and recessed broil element.
- Spring/damper door hinge system.





Rotating control panel.

Cobalt blue oven interior.

### SURFACE FEATURES

Model	DF304
Surface Burners 15,000 Btu high / 950 Btu simmer	3
Surface Burner 9,200 Btu high / 325 Btu simmer	1

Model number is for natural gas dual fuel range, add (-LP) to the model number for LP gas.


#### ACCESSORIES

- Stainless steel risers in 5" and 10" heights, or 20" riser with shelf.
- Red, black or stainless steel control knobs.
- Chrome or brass bezels.
- One piece porcelain-cast wok grate and single burner grate.
- Porcelain-cast two-burner S-grates center S-grate also available.
- Set of three standard oven racks.
- One full-extension easy glide rack.
- Broiler pan and temperature probe.
- Bake stone kit.
- Dehydration kit.
- 30" baking sheet kit.
- Front leg extension covers and rear caster covers.
- High altitude conversion kits.

Accessories are available through your authorized Wolf dealer. For local dealer information, visit the find a showroom section of our website, wolfappliance.com. This appliance is certified by Star-K to meet strict religious regulations in conjunction with specific instructions found on www.star-k.org.



## 30" Dual Fuel Range

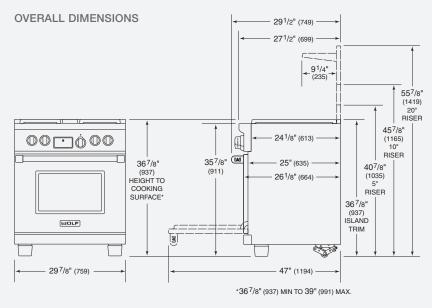


Unit dimensions may vary by  $\pm 1/8$ ".

# SPECIFICATIONS

Exterior Finish	Stainless Steel
Overall Width	29 <sup>7</sup> /8"
Overall Height (to co	oking surface) 36 <sup>7</sup> /8"
Overall Depth	29 <sup>1</sup> /2"
Oven Interior Capaci	ty 4.5 cu ft
Oven Interior Dimensions	25" W x 16 <sup>1</sup> /2" H x 19" D
Opening Width	30 "
Opening Height (to countertop) 36 "	
Opening Depth	24"
Electrical Requirements 240/208 V AC 60 Hz, 30 amp circuit	
Electrical Rating	5.2 kW at 240 V AC 4.5 kW at 208 V AC
Total Amps	21.7
Shipping Weight	325 lbs

### INSTALLATION SPECIFICATIONS

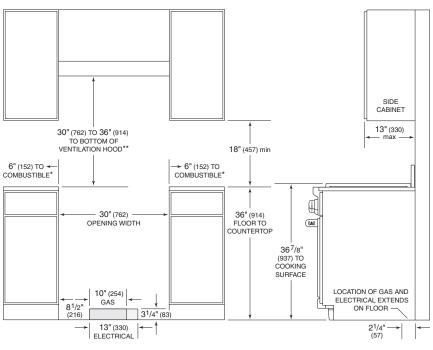

\*Minimum clearance from rough opening to combustible materials up to 18" (457) above countertop. \*\*36" (914) minimum clearance from countertop to combustible materials without ventilation hood. NOTE: For island installations, 12" (305) minimum clearance from back of range to combustible rear wall above countertop.

### INSTALLATION NOTES

- A Wolf pro wall, chimney, island ventilation hood or hood liner is recommended.
- High altitude conversion kit for LP gas installations above 8,600'. For natural gas above 10,250', contact Wolf customer service.

Dimensions in parentheses are in millimeters unless otherwise specified.