## GENERAL NOTES

NOTES ON THESE DRAWINGS ARE NOT INTENDED TO REPLACE SPECIFICATIONS. SEE SPECIFICATIONS FOR REQUIREMENTS IN ADDITION TO DRAWING NOTES.

STRUCTURAL DRAWINGS SHALL BE USED IN CONJUNCTION WITH PROJECT SPECIFICATIONS AND THE ARCHITECTURAL, MECHANICAL, ELECTRICAL, PLUMBING, FIRE PROTECTION, EQUIPMENT, SITE AND SHOP DRAWINGS. CONSULT THESE DRAWINGS FOR LOCATIONS AND DIMENSIONS OF CHASES, INSERTS, SLEEVES, DEPRESSIONS AND OTHER DETAILS NOT SHOWN ON THE STRUCTURAL DRAWINGS.

ALL DIMENSIONS, ELEVATIONS AND CONDITIONS MUST BE VERIFIED IN THE FIELD BY THE GENERAL CONTRACTOR. ANY DISCREPANCY SHALL BE BROUGHT TO THE ATTENTION OF THE ENGINEER BEFORE PROCEEDING WITH THE AFFECTED PART OF THE WORK. THE CONTRACTOR SHALL DETERMINE ALL NECESSARY DIMENSIONS, ELEVATIONS AND CONDITIONS REQUIRED FOR THE FABRICATION AND ERECTION OF THE BUILDING'S COMPONENTS PRIOR TO THE SUBMISSION OF SHOP DRAWINGS. ALL SHOP DRAWINGS SHALL ACCURATELY REFLECT THE GENERAL CONTRACTOR'S VERIFICATION OF FIELD CONDITIONS.

SHOP DRAWINGS SHALL BE ORIGINAL DRAWINGS PREPARED BY THE GENERAL CONTRACTOR OR A SUBCONTRACTOR. REPRODUCTION OF ANY STRUCTURAL DRAWING FOR USE AS A SHOP DRAWING IS NOT ACCEPTABLE.

THE STRUCTURE IS DESIGNED TO BE SELF-SUPPORTING AND STABLE AFTER THE BUILDING IS COMPLETE. IT IS SOLELY THE GENERAL CONTRACTOR'S RESPONSIBILITY TO DETERMINE ERECTION PROCEDURES AND SEQUENCING TO ENSURE THE THE SAFETY OF THE BUILDING AND IT'S COMPONENTS DURING ERECTION. THIS INCLUDES THE ADDITION OF NECESSARY SHORING, SHEETING, TEMPORARY BRACING, GUYS AND/OR TIEDOWNS. SUCH MATERIAL SHALL REMAIN THE PROPERTY OF THE GENERAL CONTRACTOR AFTER COMPLETION OF THE BUILDING.

SECTIONS AND DETAILS SHOWN ON THE STRUCTURAL DRAWINGS SHALL BE CONSIDERED TYPICAL AND USED IN SIMILAR CONDITIONS.

THE GENERAL CONTRACTOR AND ALL SUBCONTRACTORS SHALL FOLLOW ALL APPLICABLE FEDERAL, STATE AND MUNICIPAL REGULATIONS INCLUDING THE FEDERAL DEPARTMENT OF LABOR OCCUPATIONAL SAFETY AND HEALTH ACT.


## DESIGN CRITERIA

BUILDING CODE: 2009 INTERNATIONAL BUIULDING CODE

## DES


ESIGN LOADS:	
LIVE LOADS  UUPER FLOORS OFFICE AREAS AND CORRIDORS  STAIRS AND EXITS  FIRST FLOOR LOBBIES	80 PSF 100 PSF 100 PSF
SNOW LOAD GROUND SNOW LOAD, Pg SNOW EXPOSURE FACTOR, Ce SNOW LOAD IMPORTANCE FACTOR, IS THERMAL FACTOR, Ct FLAT ROOF SNOW LOAD, Pf	60 PSF I.O I.O I.O 42 PSF
WIND LOAD  BASIC WIND SPEED (3 SEC GUST), V3s  WIND IMPORTANCE FACTOR, IW  BUILDING CATEGORY  EXPOSURE CATEGORY	IOO MPH I.O I B
EARTHQUAKE DESIGN DATA SEISMIC IMPORTANCE FACTOR, IE MAPPED SPECTRAL RESPONSE ACCELERATIONS 0.2 SEC PERIOD, Ss I SEC PERIOD, SI	1.0 0.240 0.078
SITE CLASS  SPECTRAL RESPONSE COEFFICIENTS  O.2 PERIOD 5% DAMPED, Sds I SEC PERIOD 5% DAMPED, SdI  SEISMIC DESIGN CATEGORY  BASIC SESIMIC-FORCE-RESISTING SYSTEM  DESIGN BASE SHEAR  SEISMIC RESPONSE COEFFICIENT, Cs  DEFLECTION AMPLIFICATION FACTOR, Cd  RESPONSE MODIFICATION COEFFICIENT, R  SYSTEM OVERSTRENGTH FACTOR, \( \Omega\)  ANALYSIS PROCEDURE	E  O.40I O.182 C ORDINARY STEEL CONCENTRICALLY BRACED FRAM 13.2 KIPS O.123 3.25 3.25 2.0 EQUIVALENT LATERAL FORCE

	COLUMI	N SCHEDULE		
COLUMN MARK	SIZE	BOT. OF BASE PL ELEV.	BASE PL TYPE	TOP OF COLUMN ELEV.
A-I A-2 A-3 A-4 B-I B-4 C-3 C-4	WI <i>O</i> x33	8'-11"	Α (	58'-9"
B-2 B-3	WI <i>O</i> ×33	8'-11"	Α	58'-3"
C-l C-2 D-l D-4	WI <i>O</i> x33	8'-5"	A	58'-9"
D-2 D-3	WI <i>O</i> x33	8'-5"	Α (	58'-3"
E-I E-2 E-3 E-4	WI <i>O</i> x33	7'-11"	A	58'-9"

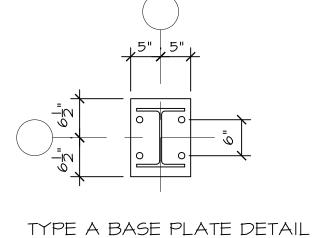


3/4"=1'-0" THICKNESS = I" HOLE DIA = 1 1/16"


HOLE EDGE DIST = 1 1/2" U.N.O.

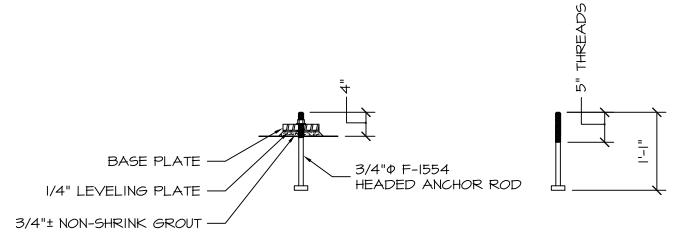

TYPICAL ANCHOR ROD DETAILS

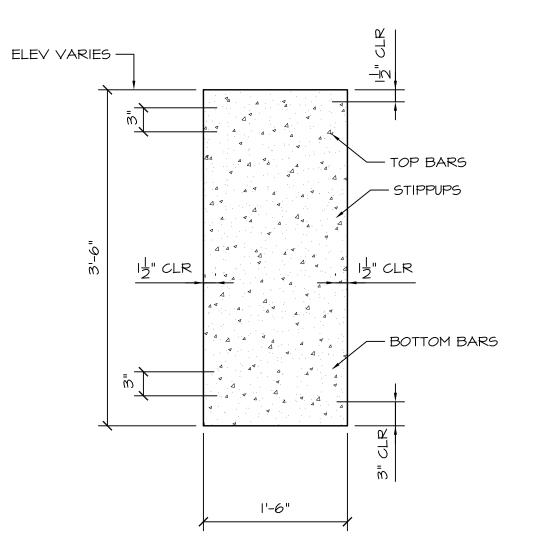

GRADE BEAM AND TIE BEAM REINFORCING SCHEDULE					
MARK	TOP BARS	BOTTOM BARS	STIRRUPS		
т.В.	I ROW (3) #6 EXTEND 24" INTO PILE CAP	I ROW (3) #6 EXTEND 24" INTO PILE CAP	#3@ 2"		
6.B. I	2 ROW (3) #8 EXTEND 24" INTO PILE CAP WITH 90° HOOK	2 ROW (3) #7 EXTEND 24" INTO PILE CAP WITH 90° HOOK	#3@9"		
<i>G</i> .B. 2	2 ROW (3) #6 EXTEND 15"" INTO G.B. I WITH 90° HOOK	2 ROW (3) #6 EXTEND 15" INTO G.B. WITH 90° HOOK	#3@9"		



PROPRIETORS OF UNION WHARF

WIDGERY WHA BUILDING 1