


**DOOR SCHEDULE**

No.	LOCATION	SIZE	TYPE	THICK.	DOOR		FRAME		HWM#	REMARKS
					MATL.	FINISH	MATL.	FINISH		
1	STOREFRONT	EXIST.	EXIST.	EXIST.	EXIST.	EXIST.	EXIST.	EXIST.	EXIST.	
2	STORAGE	3'-0" X 7'-0"	A	1 3/4"	SCWD	P1b	HM	P1b	HM5	
3	SALES TO SUPPORT	3'-0" X 7'-0"	C	1 3/4"	SCWD/GL	P1b	HM	P1b	HW2	
4	MANAGERS OFFICE	3'-0" X 7'-0"	B	1 3/4"	SCWD/GL	P1b	HM	P1b	HW5	
5	REAR EXIT	EXIST.	EXIST.	EXIST.	EXIST.	EXIST.	EXIST.	EXIST.	EXIST.	PROVIDE HW6 IF NOT EXISTING
6	INVENTORY/MJF RM.	3'-0" X 7'-0"	A	1 3/4"	SCWD	P1b	HM	P1b	HW4	DELETE KICK PLATE
7	UTILITY ROOM	3'-0" X 7'-0"	A	1 3/4"	SCWD/GL	P1b	HM	P1b	HW2	DELETE KICK PLATE
8	TOILET ROOM	3'-0" X 7'-0"	A	1 3/4"	SCWD	P1b	HM	P1b	HW3	
9	TOILET ROOM	3'-0" X 7'-0"	A	1 3/4"	SCWD	P1b	HM	P1b	HW3	
10	ELECTRICAL ROOM	3'-0" X 7'-0"	A	1 3/4"	SCWD/GL	P1b	HM	P1b	HW5	DELETE KICK PLATE
11	SIDE EXIT	EXIST.	EXIST.	EXIST.	EXIST.	EXIST.	EXIST.	EXIST.	EXIST.	CLOSE AND PERMANENTLY LOCK
12	TRUCK DOCK	EXIST.	EXIST.	EXIST.	EXIST.	EXIST.	EXIST.	EXIST.	EXIST.	CLOSE AND PERMANENTLY LOCK

**DOOR TYPES**

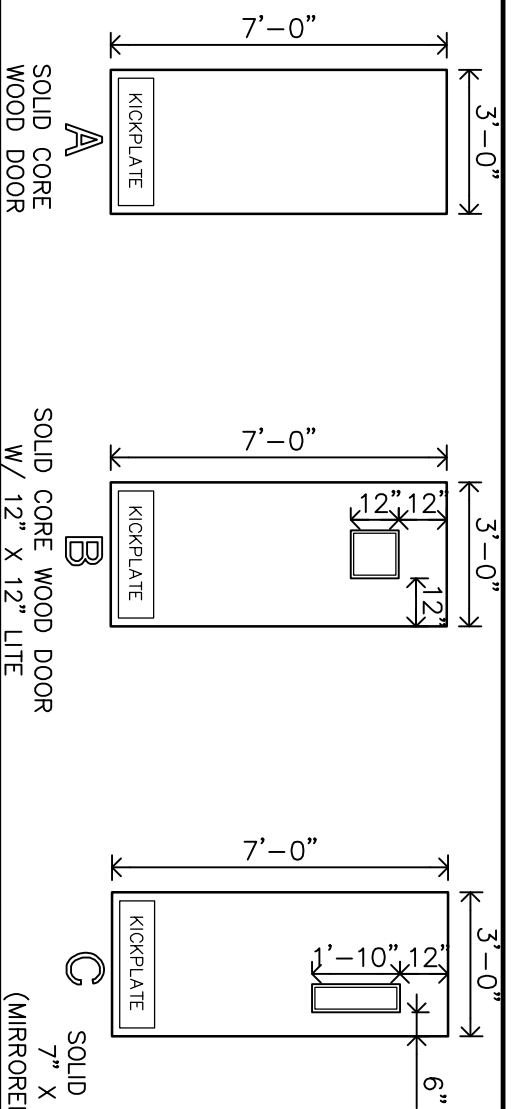

**HARDWARE SETS**

NOTE: UNLESS INDICATED OTHERWISE THE STANDARD FINISH FOR DOOR HARDWARE IS US260

- HWM1  
STOREFRONT ENTRY  
1 DOOR  
1 CYLINDER  
1 THUMBTURN  
1 PUSH/PULL SET  
1 DOOR PLATE  
1 THRESHOLD  
1 SWEEP  
1 SEAL
- MFG STANDARD  
MS1890S-1-1/8  
TE76-C181-RF-626  
TE844-C181-626  
O-484  
P4529-98  
P4529-80  
425  
102V  
MFG STANDARD

- HWM2  
PASSAGE WITH CLOSER  
1 1/2 PR BUTTS  
1 LOCKSET  
1 CLOSER  
1 KICKPLATE  
1 STOP  
3 SILENCER
- STA FB8179 4-1/2 X 4-1/2  
BES 94KQ150-53-626  
STA D3550-SB  
QUA 10" X 2" LDW 166A  
GJ 431ES  
GJ 6464

- HWM3  
PRIVACY WITH CLOSER  
1 1/2 PR BUTTS  
1 PRIVACY  
1 CLOSER  
1 KICKPLATE  
3 SILENCER
- STA FB8179-4 1/2 X 4 1/2  
BES 94KQ150-53-626  
STA D3550-SB  
QUA 10" X 2" LDW 166A  
GJ 431ES  
GJ 6464

- HWM4  
STORE ROOM LOCK WITH CLOSER  
1 1/2 PR BUTTS  
1 LOCKSET  
1 CLOSER  
1 KICKPLATE  
1 STOP  
3 SILENCER
- STA FB8179-4 1/2 X 4 1/2  
BES 93K7JAB15D-53-626  
STA D3550-SB  
QUA 10" X 2" LDW 166A  
GJ 431ES  
GJ 6464

- HWM5  
OFFICE LOCK WITH CLOSER  
1 1/2 PR BUTTS  
1 LOCKSET  
1 CLOSER  
1 STOP  
3 SILENCER
- STA FB8179-4 1/2 X 4 1/2  
BES 93K7JAB15D-53-626  
STA D3550-SB  
QUA 10" X 2" LDW 166A  
GJ 431ES  
GJ 6464

- HWM6  
EXTENSOR WITH LOCAL ALARM  
1 1/2 PR BUTTS  
1 ALARM LOCK  
1 CYLINDER (1.5)  
1 CLOSER  
1 KICKPLATE  
1 STOP  
1 SWEEP  
1 THRESHOLD  
1 SEAL  
1 VIEWER
- STA FB8179 -NRP -4 1/2 X 4 1/2  
PRE PR-9101AKKS01-689  
BES 1E74  
STA D4550-SB  
QUA 10" X 2" LDW 166A  
NGP 102V  
NGP 5050-BN  
IVE 6988B

- MANUFACTURERS LISTING
- STA STANLEY HARDWARE  
QUA QUALITY HARDWARE  
BES BEST LOCK  
MFG MORGAN  
NGP NATIONAL GUARD PRODUCTS  
GJ G.Y.N.N.-JOHNSON  
IVE H.B. IVES  
A/R ADAMS/RITE  
A/R ARNOLD HARDWARE  
ABM ABM-DOOR HARDWARE  
ABE ABEWCO

**LOCK KEY / CORE ORDERING PROCEDURES**

- UPON PROJECT COMPLETION, GENERAL CONTRACTOR (GC) SHALL REPLACE EXISTING LOCK CORES. GENERAL CONTRACTOR SHALL PROVIDE THE APPROVED LOCK CORES AS NOTED PER THE ARCHITECTURAL SPECIFICATIONS
- GC IS ABLE TO REQUEST ONLY THE NUMBER OF SPECIFIED CORES NEEDED AND (3) THREE MASTER KEYS. CONTROL KEY WILL BE SENT WITH MASTER KEYS TO (GC) TO INSTALL CORES
- GENERAL CONTRACTOR TO VERIFY QUANTITY OF CORES OR PROVIDE DOOR SCHEDULE TO NATIONAL SUPPLIER
- GENERAL CONTRACTOR TO ALLOW (2) WEEKS TO ORDER AND RECEIVE LOCK CORES FROM APPROVED SINGULAR WIRELESS SUPPLIER.
- NATIONAL SUPPLIER WILL SHIP LOCK CORES/KEYS DIRECTLY TO GENERAL CONTRACTOR ADDRESS ONLY. INVOICING TO BE SENT TO (GC) FOR PAYMENT
- DISTRICT SALES MANAGER AND THE AUTHORIZED RETAIL FACILITIES PERSONNEL MUST BOTH APPROVE ALL ADDITIONAL KEYS OR LOCK CORES.

AT&T APPROVED SUPPLIERS:  
STANLEY SECURITY SOLUTIONS  
800 EAST 7TH STREET  
HOUSTON, TX 77002  
1-877-333-9294  
CONTACT:  
JUDY HUNTINGER  
j huntinger@stanleyworks.com  
1-877-333-9294  
KEN CANN  
404-915-5502

**MISCELLANEOUS EQUIPMENT**

- SAFE: CORPORATE SAFE SPECIALISTS, SINGULAR WIRELESS SAFE, MODEL #RH3420K2-SG1.  
KEMMORE 4.6 CU. FT. COMPACT REFRIGERATOR, MODEL #94673, OR APPROVED EQUAL
- MICROWAVE OVEN: GE #E910WC, OR APPROVED EQUAL
- FIRE EXTINGUISHER: LARSEN'S MFG. COMPANY #MP-10, MP SERIES, DRY CHEMICAL, COLOR: RED MOUNT SO THAT HANDLE IS NO HIGHER THAN 48" AFT
- METAL WALL LOCKERS (SIX OPENING) ED5AL/CTADEL #4L5141/41TX37, COLOR: GREY, 12"Wx18"Dx78"H PROVIDE TWO PER STORE

**TOILET ROOM GENERAL NOTES**

- G.C. RESPONSIBLE FOR PROVIDING AND INSTALLING ALL TOILET ROOM EQUIPMENT NOT EXISTING.
- TOILET ACCESSORIES TO BE PURCHASED BY G.C. FROM GRANGER. CONTACT: JASON JONES, 404-234-1425

**TOILET ROOM EQUIPMENT**

- TOILET PAPER DISPENSER: BOBRICK #B-685, FINISH: STAINLESS STEEL, OR APPROVED EQUAL
- COAT HOOK: BOBRICK #B-6707, FINISH: STAINLESS STEEL, OR APPROVED EQUAL
- GRAB BARS: BOBRICK #B-550 SERIES, FINISH: STAINLESS STEEL, OR APPROVED EQUAL - PROVIDE (1) 36" (1) 42" AND (1) 18" PER TOILET ROOM
- SOAP DISPENSER: BOBRICK #B-156, OR APPROVED EQUAL
- MIRROR: BOBRICK #B-165 24"Wx36"H, FINISH: STAINLESS STEEL, OR APPROVED EQUAL
- INSULATION KIT: TRUEBERO INC. #102W, COLOR: WHITE

