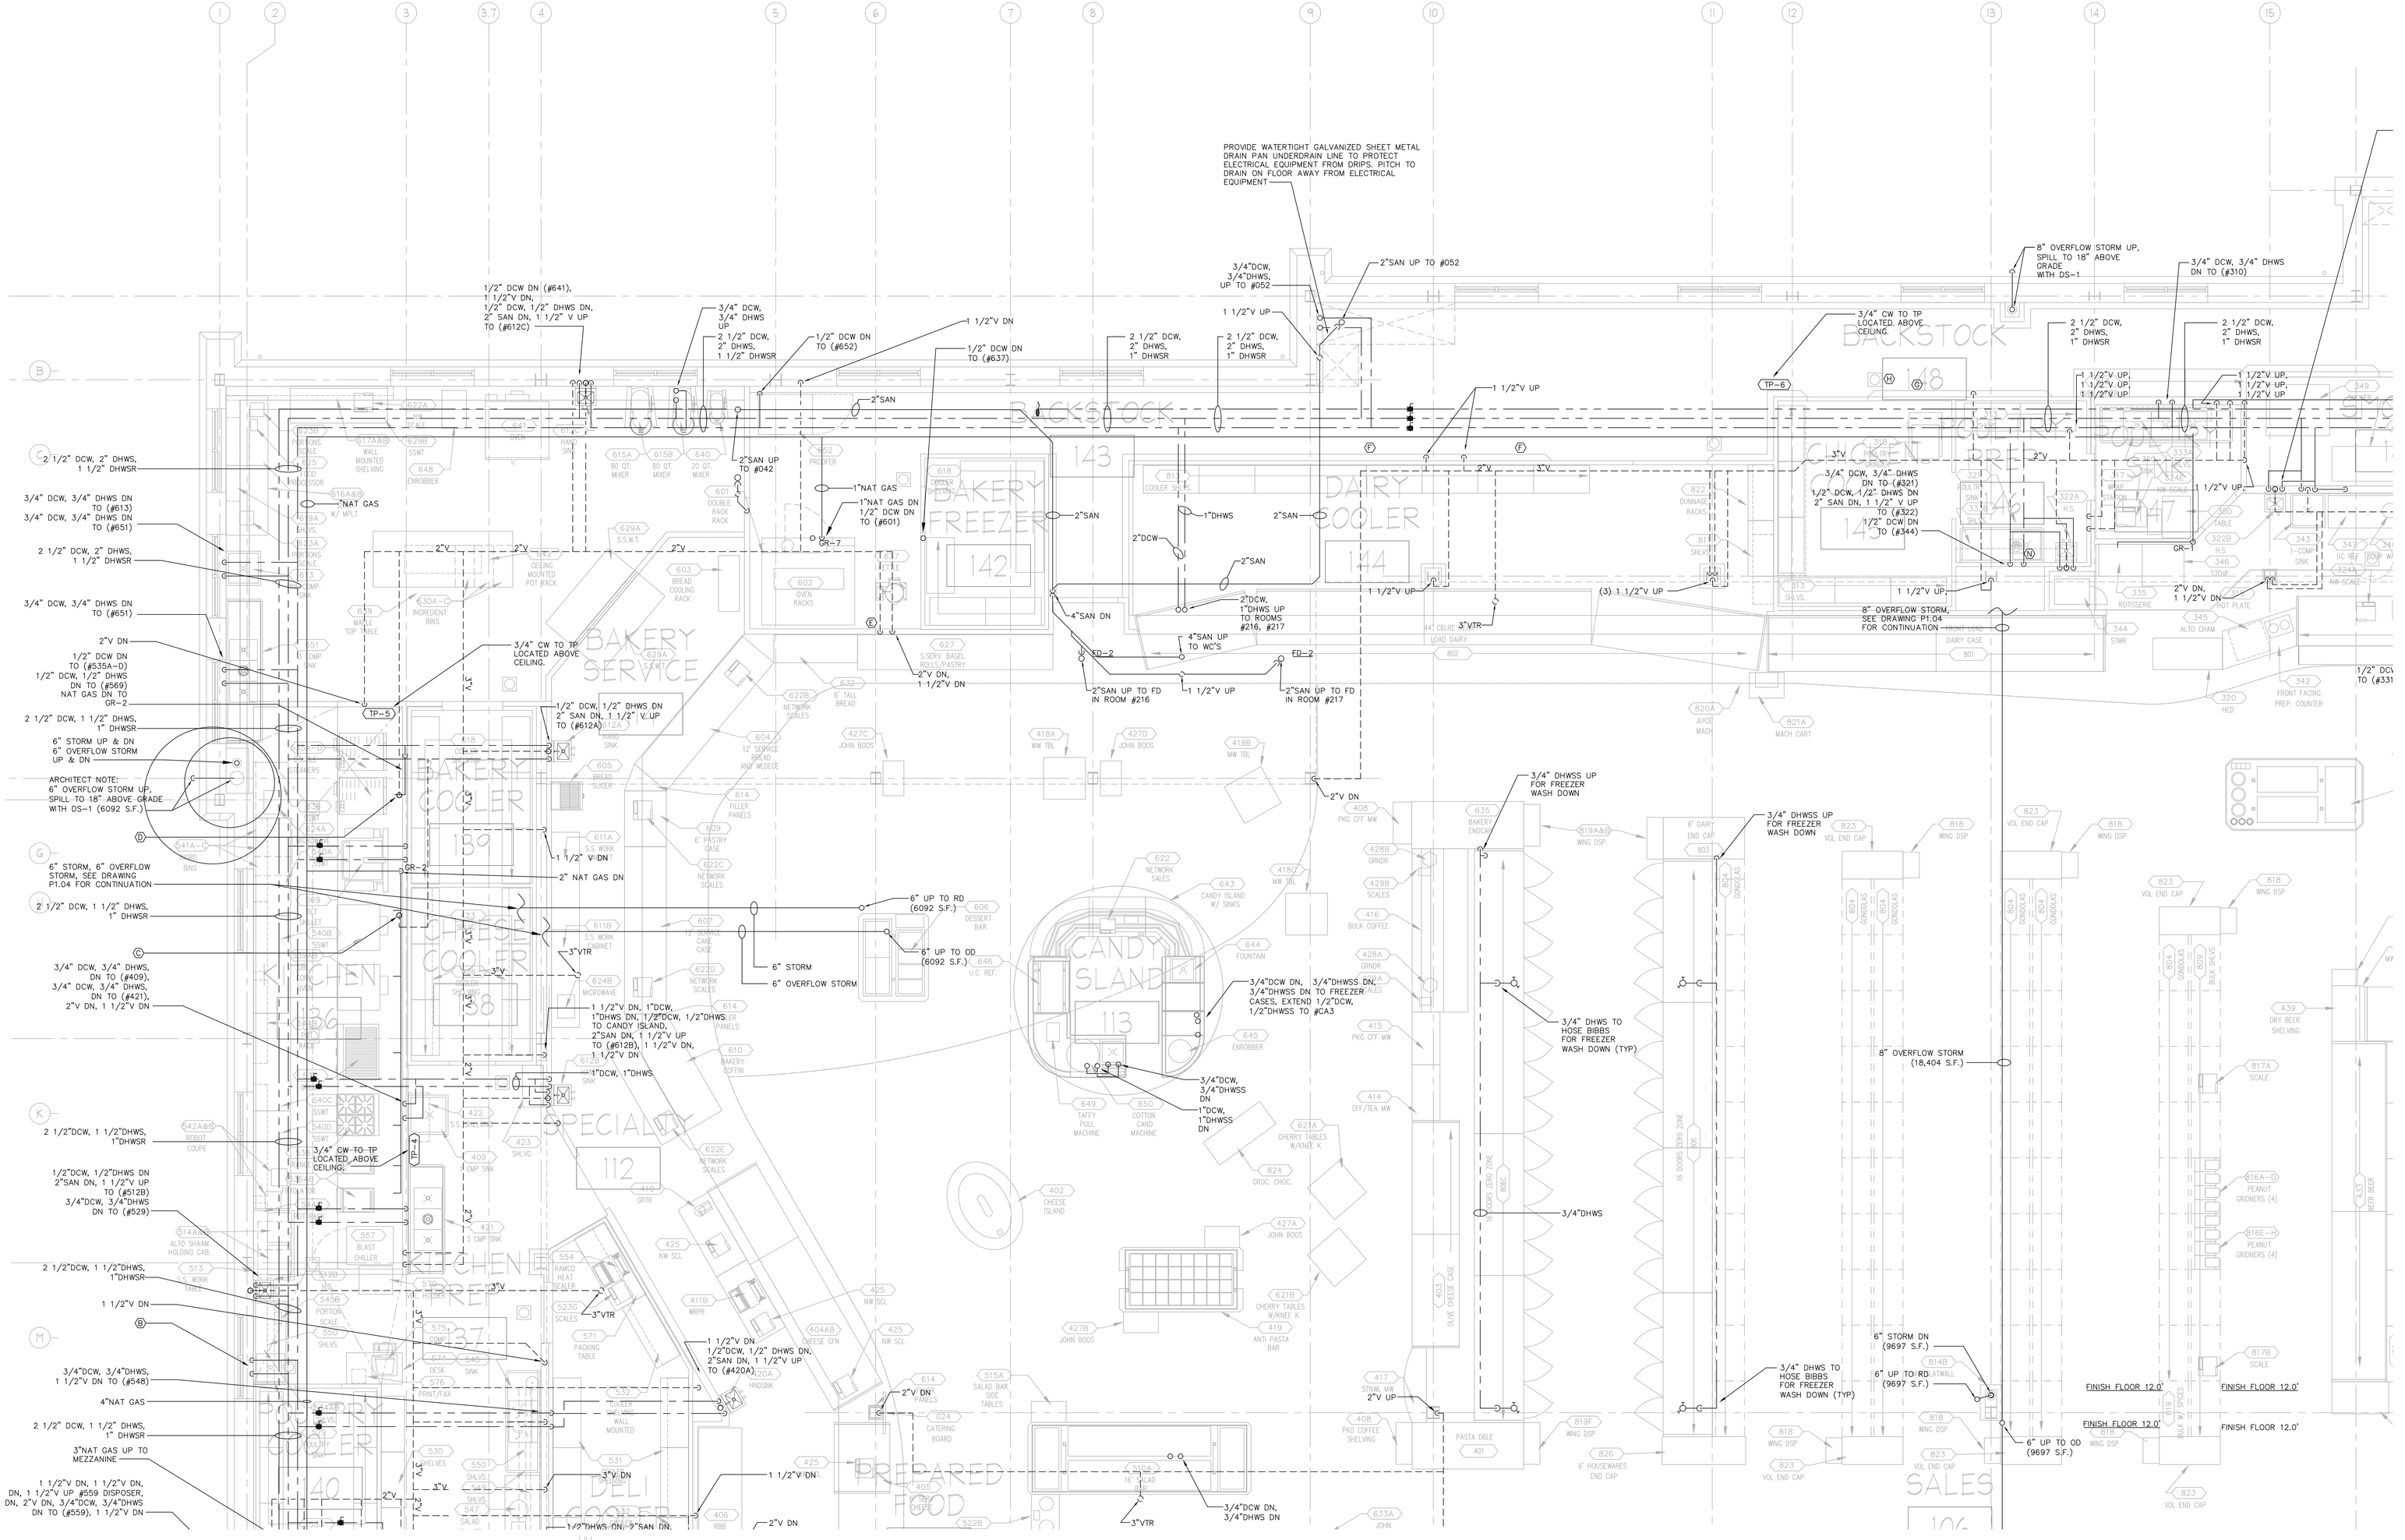

WALK-IN COOLER AND FREEZER EVAPORATOR DRAIN NOTES:

*ALL PIPING IS TO BE ROUTED SO THAT IT IS NOT VISABLE TO THE PUBLIC.
*ALL PIPING TO BE 1"TYPE M OR L COPPER WITH DRAINAGE FITTINGS. PROVIDE TRAP PER EVAPORATOR AND MANUFACTURER'S INSTRUCTIONS WITH CLEANOUTS AT CONNECTION TO EVAPORATOR.
*FOR ALL WALK IN FREEZERS AND MEAT, SEAFOOD AND POULTRY COOLERS, PROVIDE RAY-CHEM XL-TRACE FREEZE PROTECTION HEATING CABLE ON CONDENSATE DRAINS, COVERED WITH 1/2" ELASTOMERIC FOAM INSULATION. FOLLOW MANUFACTURER'S INSTRUCTIONS FOR INSTALLATION.

(A) ROUTE CONDENSATE PIPING FROM EVAPORATORS IN DELI COOLER TO THIS ID. SEE DETAIL 1/P7.03..

(B) ROUTE CONDENSATE PIPING FROM EVAPORATORS IN POULTRY COOLER TO THIS ID. PROVIDE AIR GAP AT TERMINATION.

(C) ROUTE CONDENSATE PIPING FROM EVAPORATORS IN CHEESE COOLER TO ID. SEE DETAIL 1/P7.03.

(D) ROUTE CONDENSATE PIPING FROM EVAPORATORS IN BAKERY COOLER TO THIS ID. SEE DETAIL 1/P7.03.

(E) ROUTE CONDENSATE PIPING FROM EVAPORATORS IN BAKERY FREEZER TO THIS I.D. PROVIDE AIR GAP AT TERMINATION.

(F) ROUTE CONDENSATE PIPING FROM EVAPORATORS IN DAIRY COOLER TO THESE I.D. PROVIDE AIR GAP AT TERMINATION.

(G) ROUTE CONDENSATE PIPING FROM EVAPORATORS IN CHICKEN COOLER TO THIS I.D. PROVIDE AIR GAP AT TERMINATION.

(H) ROUTE CONDENSATE PIPING FROM EVAPORATORS IN POULTRY PREP TO THIS I.D. PROVIDE AIR GAP AT TERMINATION.

(I) ROUTE CONDENSATE PIPING FROM EVAPORATORS IN MEAT PREP COOLER TO THESE I.D. PROVDE AIR GAP AT TERMINATION.

(J) ROUTE CONDENSATE PIPING FROM EVAPORATORS IN MEAT COOLER AND WET PRODUCE COOLER I.D. PROVIDE AIR GAP AT TERMINATION.

(K) ROUTE CONDENSATE PIPING FROM EVAPORATORS IN SEAFOOD COOLER TO THIS I.D. PROVDE AIR GAP AT TERMINATION.

(L) ROUTE CONDENSATE PIPING FROM EVAPORATORS IN DRY PRODUCE TO THIS I.D. SEE DETAIL 1/P7.03.

(M) ROUTE CONDENSATE PIPING FROM EVAPORATORS IN PRODUCE PREP, WET PRODUCE AND HUMIDITY SYSTEM #136 TO THIS I.D. PROVIDE AIR GAP AT TERMINATION.

(N) ROUTE CONDENSATE PIPING FROM AHU-7 TO THIS I.D. SEE DETAIL 1/P7.03.

(P) ROUTE CONDENSATE PIPING FROM AHU-8 TO THIS I.D. SEE DETAIL 1/P7.03.

(Q) ROUTE CONDENSATE PIPING FROM AHU-9 TO THIS I.D. SEE DETAIL 1/P7.03.

1 PLUMBING ENLARGED ABOVE FLOOR PLAN - MARKET LEVEL - NORTHWEST CORNER
1/4" = 1'-0"

PLAN NORTH ACTUAL NORTH

KEYPLAN

P4.01 | P4.02
P4.03 | P4.04

THESE DRAWINGS SHALL NOT BE UTILIZED BY ANY PERSON, FIRM OR CORPORATION WITHOUT THE SPECIFIC WRITTEN PERMISSION OF BL COMPANIES

K:\sites\04CB\29\Arch\P04CB2940.dwg April 26, 2006 - 7:04 AM

BL Companies
ARCHITECTURE
ENGINEERING
PLANNING
LANDSCAPE ARCHITECTURE
LAND SURVEYING
ENVIRONMENTAL SCIENCES
ANALYTICAL SERVICES

355 Research Parkway
Meriden, CT 06450
(203) 630-1406
(203) 630-2615 Fax

WHOLE FOODS MARKET

ISSUED FOR CONSTRUCTION

PROPOSED GROCERY STORE
2 SOMERSET STREET
PORTLAND, CUMBERLAND COUNTY, MAINE

No. Date Desc.

REVISIONS
No. Date Desc.

ARCHITECT/ENGINEER SEAL

Designed
Drawn
Checked
Approved
Scale AS NOTED
Project No. 04CB29
Date 04-24-06
CAD File

Title
PLUMBING ENLARGED ABOVE FLOOR PLAN- MARKET LEVEL- NORTHWEST CORNER

Sheet No.
P4.01