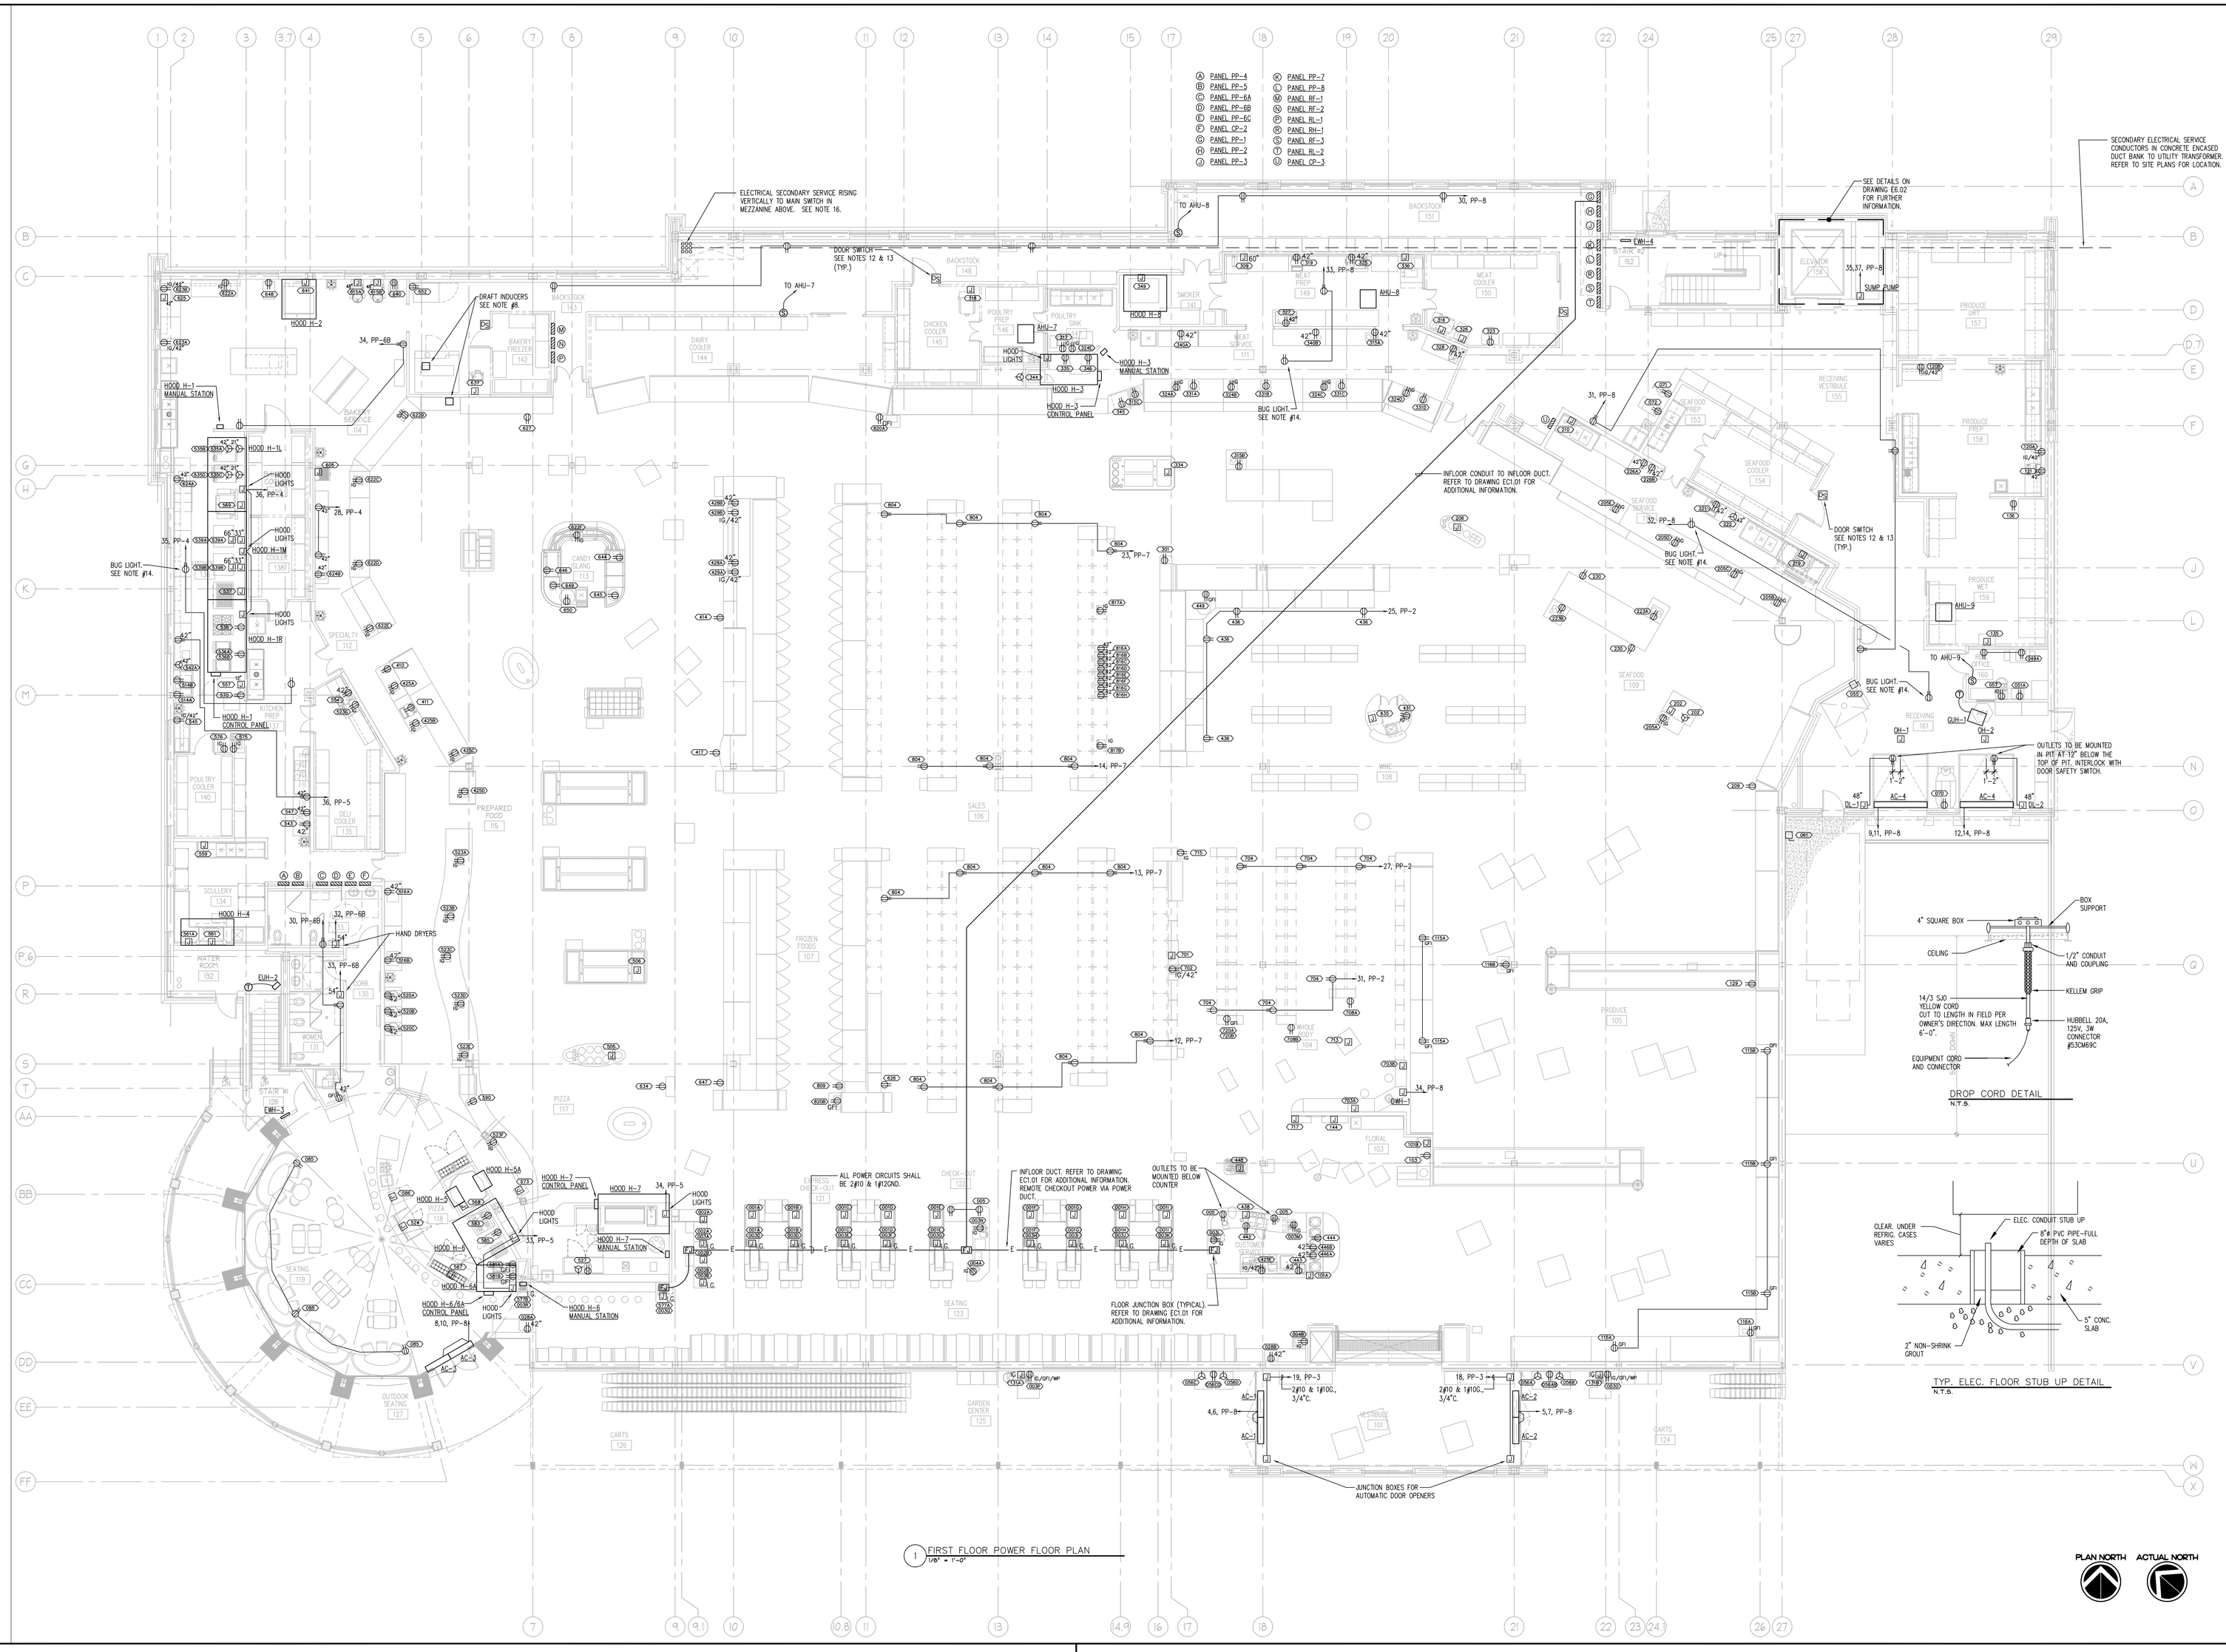

NOTES

1. ACCESS TO AND CLEARANCES AROUND ELECTRICAL EQUIPMENT SHALL CONFORM TO N.E.C. ARTICLES 110 AND 384. CONSULT ENGINEER WHERE SPACE APPEARS INADEQUATE DUE TO ARCHITECTURAL CHANGES, EQUIPMENT LAYOUT CHANGES, OR FIELD CONDITIONS. DO NOT COVER, OBSCURE OR BLOCK ACCESS TO EQUIPMENT, DATA PLATES, ACCESS PANELS OR MAINTENANCE AREAS WITH THE ELECTRICAL WORK.
2. THIS DRAWING SHOWS EQUIPMENT LOCATIONS ONLY. WIRING SHOWN IS SCHEMATIC IN NATURE. REFER TO RISERS, AND DETAILS FOR ALL REQUIRED POWER AND CONTROL WIRING. COORDINATE CONDUIT ROUTE IN FIELD WITH OTHER TRADES, EQUIPMENT AND OWNER. VERIFY ALL MOUNTING HEIGHTS WITH OWNER AND ARCHITECT PRIOR TO INSTALLATION.
3. NOT USED.
4. UNLESS NOTED OTHERWISE, ALL HOMERUNS SHOWN ARE 3/4"C., 2#12, 1#12G. TO 20A-1P C/B IN PANEL LISTED.
5. UNLESS NOTED OTHERWISE, ALL POWER WIRING OF CIRCUIT SHALL MATCH HOMERUN WIRING OF CIRCUIT. MINIMUM POWER WIRING SHALL BE 3/4"C., 2#12 & 1#12G.. MINIMUM CONTROL WIRING SHALL BE 3/4"C., 2#14.
6. COORDINATE WITH MECHANICAL PLANS FOR FINAL LOCATION OF ALL DEVICES MOUNTED ON OR IN THE VICINITY OF THE MECHANICAL WORK.
7. REFER TO DRAWING E6.02 FOR BUILDING ALARM SENSOR AND FIRE ALARM DETAILS. COORDINATE WITH MECHANICAL DOCUMENTS.
8. HVAC AND PLUMBING EQUIPMENT. REFER TO DRAWING E6.01 AND E6.02 FOR ADDITIONAL INFORMATION. COORDINATE FINAL LOCATION WITH MECHANICAL CONTRACTOR.
9. NOT USED.
10. NOT USED.
11. NOT USED.
12. PROVIDE DOOR SWITCH AT EACH DOOR LOCATION SHOWN FOR DOOR POSITION MONITORING BY REFRIGERATION CONTROL SYSTEM. DOOR SWITCH SHALL BE A SENTROL 2515A INDUSTRIAL EXTRA WIDE GAP MAGNETIC CONTACT. MOUNT AND POSITION ON DOOR EDGE PER MANUFACTURERS GUIDELINES. PROVIDE MOUNTING BRACKETS AND ACCESSORIES AS REQUIRED FOR A COMPLETE INSTALLATION.
13. COORDINATE CONTROLS WIRING AND CONDUIT IN WALK-IN COOLERS WITH RELATED WIRING SHOWN ON REFRIGERATION DRAWINGS AND DETAILS ON DRAWING E6.02.
14. PROVIDE OUTLET FOR BUG LIGHT. EXACT LOCATION OF OUTLET TO BE DETERMINED IN FIELD.
15. COORDINATE LOCATION OF OUTLET FOR REMOTE ENCLOSURES WITH ENERGY MANAGEMENT CONTRACTOR. REFER TO DRAWING EM2.01 FOR FURTHER INFORMATION.
16. PROVIDE A BID ALTERNATE PRICE FOR 2" MINIMUM COVER CONCRETE ENCASEMENT OF THESE CONDUIT RISERS FROM FIRST FLOOR TO MEZZANINE FLOOR.

THESE DRAWINGS SHALL NOT BE UTILIZED BY ANY PERSON, FIRM OR CORPORATION WITHOUT THE SPECIFIC WRITTEN PERMISSION OF BL COMPANIES

K:\JOBS\04C0829\Arch\E\04C0829P101.dwg April 27, 2006 - 10:44 PM

BL Companies
ARCHITECTURE
ENGINEERING
PLANNING
LANDSCAPE ARCHITECTURE
LAND SURVEYING
ENVIRONMENTAL SCIENCES
ANALYTICAL SERVICES
355 Research Parkway
Meriden, CT 06450
(203) 630-1406
(203) 630-2615 Fax

WHOLE FOODS MARKET

ISSUED FOR CONSTRUCTION

PROPOSED GROCERY STORE
2 SOMERSET STREET
PORTLAND, CUMBERLAND COUNTY, MAINE

No. Date Desc.

REVISIONS
No. Date Desc.

ARCHITECT/ENGINEER SEAL

Designed	G.K.
Drawn	G.K.
Checked	J.W.L.
Approved	J.W.L.
Scale	AS NOTED
Project No.	04C0829
Date	04-24-06
CAD File	E04C0829P101

Title
FIRST FLOOR POWER FLOOR PLAN

Sheet No.
EP1.01