

VOID SPACE AROUND EXISTING STEEL COLUMN AND BEHIND PIPES TO BE INFILLED WITH THERMAFIBER SAFING MATERIAL AND SMOKE SEAL COMPOUND


EXISTING ELECTRICAL WIRES TO BE TIGHTLY BUNCHED TOGETHER AND FITTED WITH A METAL SLEEVE AT THE FLOOR SHEATHING PENETRATION. JOINTS TO BE SEALED WITH FIRE CAULKING

CONT. P.T. 2x8 LEDGER ATTACHED TO EXISTING BRICK WALL W/ 1/2"Ø WEDGE ANCHORS @ 16" O.C. & 4" EMBEDMENT.

PROPOSED 8"Ø SPIRAL BATHROOM DUCT W/ FIRE DAMPERS EACH LEVEL


EXISTING BRICK WALL

EXISTING IRON PIPING SET OF 3

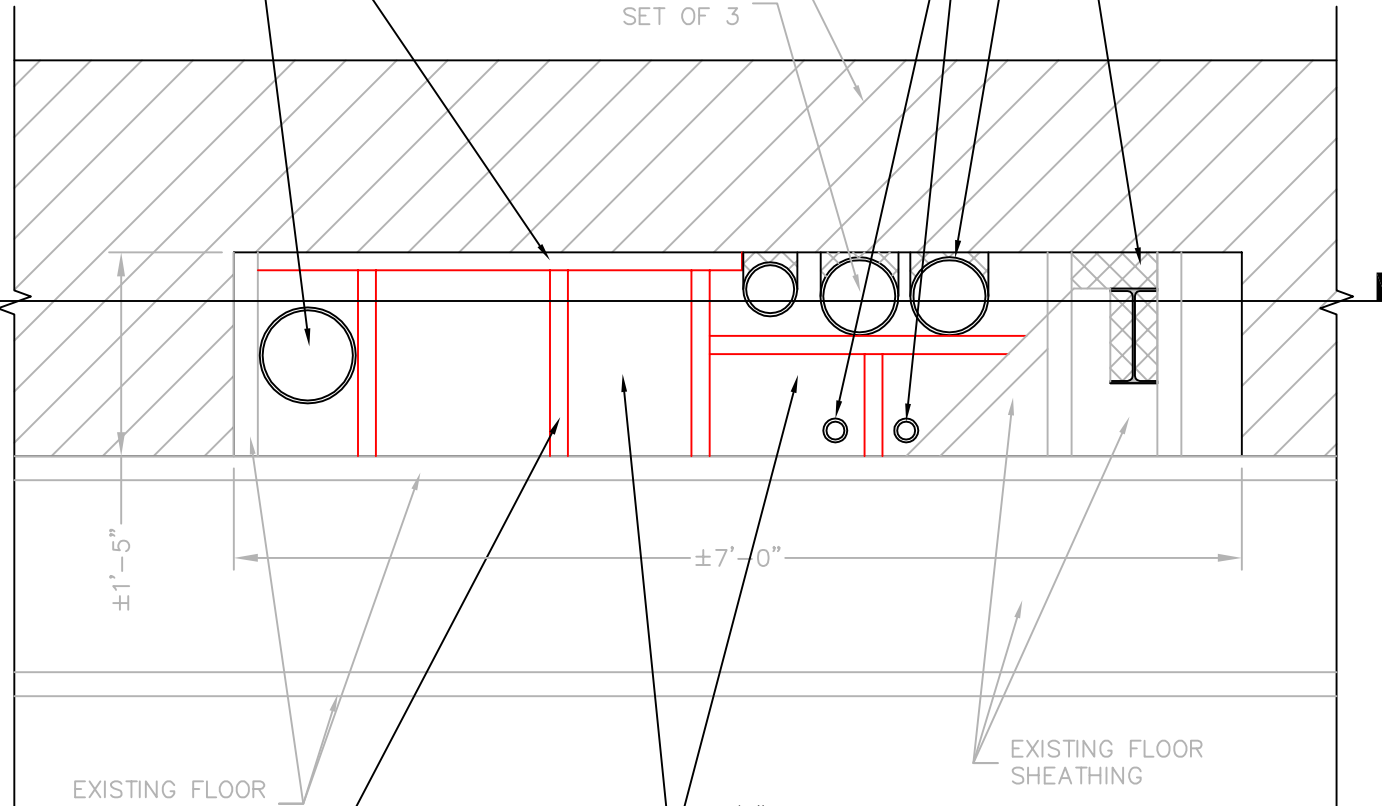

INFILL EXISTING OPENING W/ 2x6's @ 16" O.C. MAX.

3/4" T&G FLOOR SHEATHING TO BE SCRIBED AROUND EXISTING CONDUITS AND PIPING. REMAINING SPACE BETWEEN SHEATHING AND PIPING TO BE INFILLED W/FIRE CAULKING



*Benjamin Murray*

## PLAN AT EXISTING CHASE

SCALE 3/4" = 1'-0"



NO.	REV.	DATE

SHEET TITLE:	PLAN AT EXISTING CHASE
SCALE:	3/4" = 1'-0"
DATE:	SEPTEMBER 19, 2012
DRAWN BY:	REM
CHECKED BY:	REM

CLIENT & PROJECT:	COMMERCIAL PROPERTIES BUILDING RENOVATIONS
LOCATION:	4 CANAL STREET
TOWN:	PORTLAND
CONSTR.:	CUMBERLAND
STATE:	MAINE

PROJ. NO.	2011-216
<b>SK-2</b>	