City of Portland, Maine - Building or Use Permit Application 389 Congress Street, 04101, Tel: (207) 874-8703, FAX: 874-8716

Location of Construction: 52 Exchange Street	04101 Owner: Bruce Lauk	Bid Fort Arms	Phone: 883-5528	Permit No:
Owner Address:	Lessee/Buyer's Name:	Phone:	BusinessName:	DEDMIT ICOLLED
F.O. Box 485 Scarborough, ML				PERMIT ISSUED
Contractor Name:	Address: P.O. Box 385 Scarboro	ugh, ME 04070-038	e:	2 March 1997
Past Use:	Proposed Use:	COST OF WOR \$ 25,000	K: PERMIT FEE: \$ 174.00	AUG 2 7 1999
Commercial/Mult1	Sen#	FIRE DEPT.	Denied Use Group AType:3.	CITY OF PORTLAND
		Signature:	17 Bocs 96 Hills	Zone: CBL: 032-I-002
Proposed Project Description:			ACTIVITIES DISTRICT (P.J.D.)	Zoning Approval:
Fire Job. Interior Renovations Du	e to Fire.	Action:	Approved [Special Zone or Reviews:
				□ □ Shoreland
			Denied	□ Wetland □ Flood Zone
		Signature:	Date:	Subdivision
Permit Taken By:	Date Applied For:	August 23, 195	99	Site Plan maj Ominor Omm I
				Zoning Appeal
1. This permit application does not preclude t	ne Applicant(s) from meeting applicable	e State and Federal rules.		□ Variance □ Miscellaneous
2. Building permits do not include plumbing	septic or electrical work.			
3. Building permits are void if work is not sta		issuance. False informa-		□ Interpretation
tion may invalidate a building permit and	stop all work	o: Maine Propert	ties Inc.	Approved Denied
		P.O. Box 385		
		Scurborough,	ME 04070-0385	Historic Preservation
				Does Not Require Review
			PERMIT ISSUED	Requires Review
		W	ITH REQUIREMENTS	Action: A spanal
	CERTIFICATION			Appoved
I hereby certify that I am the owner of record of	the second se			
authorized by the owner to make this application if a permit for work described in the application				1.
areas covered by such permit at any reasonable				Date:
		8-23-99		14
SIGNATURE OF APPLICANT	ADDRESS:	DATE:	PHONE:	
RESPONSIBLE PERSON IN CHARGE OF WO	NPK TITI E		PHONE:	
RESPONSIBLE FERSON IN CHARGE OF WC	NN, ITTLE		FROME:	CEO DISTRICT
White-	Permit Desk Green-Assessor's C	anary-D.P.W. Pink-Pu	ublic File Ivory Card-Inspector	

THIS IS NOT A PERMIT/CONSTRUCTION CANNOT COMMENCE UNTIL THE PERMIT IS ISSUED

Building or Use Permit Pre-Application

Attached Single Family Dwellings/Two-Family Dwelling

Multi-Family or Commercial Structures and Additions Thereto

In the interest of processing your application in the quickest possible manner, please complete the Information below for a Building or Use Permit.

NOTE**If you or the property owner owes real estate or personal property taxes or user charges on ANY PROPERTY within the City, payment arrangements must be made before permits of any kind are accepted.

Total Square Footage of Proposed Structure	Ex192126	Square Footage of Lot	KIGTING		
Tax Assessor's Chart, Block & Lot Number Chart# 032 Block# I Lot# ()		CLO VERT ArENI LAUKA		Telephone#: 883-53	528
Owner's Address: P.O. BOX 185 SCAFBOROUGH ME.	Lessee/Buyer's N	iame (If Applicable)		t Of Work: 25, UTU	\$ Fee 1740
Proposed Project Description: (Please be as specific as po 52/54 = TANECCHIEL REPORT 256 - 19 APTHETS • REPLACED 58 I.C. LEL - LOTHING, CHIEF	Centrag Farme	FRAMES , DATCH :			iou lai
Contractor's Name, Address & Telephone	C. P.O. To	385 Scameric	44. ALE	01070-2	Rec'd By
Current Use: Commister / MULTI		Proposed Use: SA			

Separate permits are required for Internal & External Plumbing, HVAC and Electrical installation.

 All construction must be conducted in compliance with the 1996 B.O.C.A. Building Code as amended by Section 6-Art II. •All plumbing must be conducted in compliance with the State of Maine Plumbing Code.

 All Electrical Installation must comply with the 1996 National Electrical Code as amended by Section 6-Art III. •HVAC(Heating, Ventililation and Air Conditioning) installation must comply with the 1993 BOCA Mechanical Code.

You must Include the following with you application:

2) A Copy of your Construction Contract, if available T. OF BUILDING INSPECTION 3) A Plot Plan/Site Di 1) ACopy of Your Deed or Purchase and Sale Agreement

AUG 2 3 1999

Minor or Major site plan review will be required for the above proposed projects. The attached checklist outlines the minimum standards for a site plan.

4) Building Plans

Unless exempted by State Law, construction documents must be designed by a registered design professional A complete set of construction drawings showing all of the following elements of construction

Cross Sections w/Framing details (including porches, decks w/ railings, and accessory structures)

PATCH/PAINT WALLS, NEW & REFAMILIES FORM JOINT


- Floor Plans & Elevations
- Window and door schedules
- Foundation plans with required drainage and dampproofing
- Electrical and plumbing layout. Mechanical drawings for any specialized equipment such as furnaces, chimneys, gas equipment, HVAC equipment (air handling) or other types of work that may require special review must be included.

Certification

I hereby certify that I am the Owner of record of the named property, or that the proposed work is authorized by the owner of record and that I have been authorized by the owner to make this application as his/her authorized agent. I agree to conform to all applicable laws of this jurisdiction. In addition, if a permit for work described in this application is issued, I certify that the Code Official's authorized representative shall have the authority to enter all areas covered by this permit at any reasonable hour to enforce the provisions of the codes applicable to this permit.

Signature of applicant:	Cales inter per	FBCC	Date: 8/23/99	
in first in the	600 00 C . 1 . 1 . 61000	1 67 00 61	000 00 files don't floore Day	

Building Permit Fee: \$30.00 for the 1st \$1000.cost plus \$6.00 per \$1,000.00 construction cost thereafter. Additional Site review and related fees are attached on a separate addendum

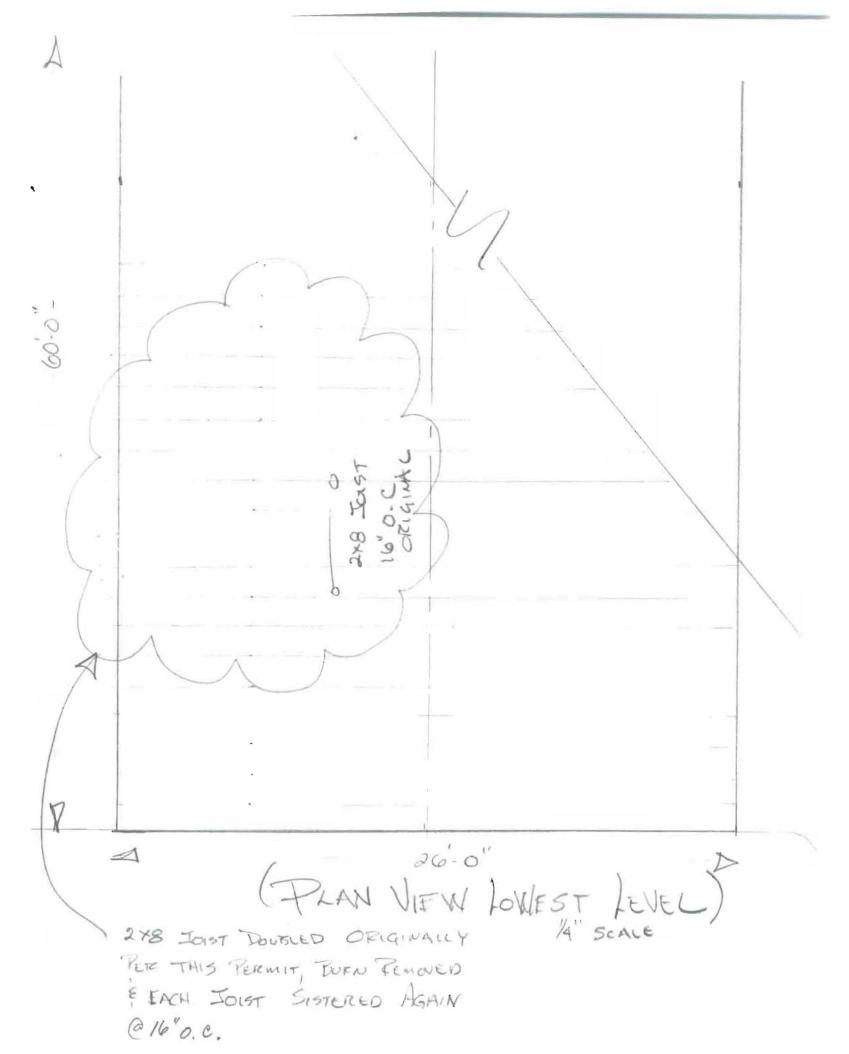

	BUILDING PERMIT REPORT
	DATE: 23 Aug 99 ADDRESS: 52 Exchange ST. CBL: 032-I-002
	REASON FOR PERMIT: "InTerior renovations / repair after fire damage
	BUILDING OWNER: Bruce Laukq
	PERMIT APPLICANT: IContractor MAINE ProporTies Inc
	USE GROUP $B = F = 1 - R - 2 - A = 3$ construction type $3 = B$
	The City's Adopted Building Code (The BOCA National Building Code/1996 with City Amendments) The City's Adopted Mechanical Code (The BOCA National Mechanical Code/1993)
	CONDITION(S) OF APPROVAL
	This permit is being issued with the understanding that the following conditions are met: $\frac{\frac{1}{2}}{\frac{1}{2}}$
	Approved with the following conditions:
X	 This permit does not excuse the applicant from meeting applicable State and Federal rules and laws. Before concrete for foundation is placed, approvals from the Development Review Coordinator and Inspection Services must be obtained.
	 (A 24 hour notice is required prior to inspection) Foundation drain shall be placed around the perimeter of a foundation that consists of gravel or crushed stone containing not more than 10 percent material that passes through a No. 4 sieve. The drain shall extend a minimum of 12 inches beyond the outside edge of the footing. The thickness shall be such that the bottom of the drain is not higher than the bottom of the base under the floor, and that the
	top of the drain is not less than 6 inches above the top of the footing. The top of the drain shall be covered with an approved filter membrane material. Where a drain tile or perforated pipe is used, the invert of the pipe or tile shall not be higher than the floor elevation. The top of joints or top of perforations shall be protected with an approved filter membrane material. The pipe or tile shall be placed on not less than 2" of gravel or crushed stone, and shall be covered with not less than 6" of the same material. Section 1813.5.2
	4. Foundations anchors shall be a minimum of 1/2" in diameter, 7" into the foundation wall, minimum of 12" from corners of foundation and a maximum 6' o.c. between bolts. (Section 2305.17)
	 Waterproofing and dampproofing shall be done in accordance with Section 1813.0 of the building code.
	6. Precaution must be taken to protect concrete from freezing. Section 1908.0
	7. It is strongly recommended that a registered land surveyor check all foundation forms before concrete is placed. This is done to verify that the proper setbacks are maintained.
	8. Private garages located <u>beneath habitable rooms</u> in occupancies in Use Group R-1, R-2, R-3 or I-1 shall be separated from adjacent interior spaces by fire partitions and floor/ceiling assembly which are constructed with not less than 1-hour fire resisting rating. <u>Private garages attached side-by-side to rooms</u> in the above occupancies shall be completely separated from the interior spaces and the attic area by means of ½ inch gypsum board or the equivalent applied to the garage means of ½ inch gypsum board or the equivalent applied to the garage means of ½ inch gypsum board or the equivalent applied to the garage means of ½ inch gypsum board or the equivalent applied to the garage means of ½ inch gypsum board or the equivalent applied to the garage means of ½ inch gypsum board or the equivalent applied to the garage means of ½ inch gypsum board or the equivalent applied to the garage means of ½ inch gypsum board or the equivalent applied to the garage means of ½ inch gypsum board or the equivalent applied to the garage means of ½ inch gypsum board or the equivalent applied to the garage means of ½ inch gypsum board or the equivalent applied to the garage means of ½ inch gypsum board or the equivalent applied to the garage means of ½ inch gypsum board or the equivalent applied to the garage means of ½ inch gypsum board or the equivalent applied to the garage means of % inch gypsum board or the equivalent applied to the garage means of % inch gypsum board or the equivalent applied to the garage means of % inch gypsum board or the equivalent applied to the garage means of % inch gypsum board or the equivalent applied to the garage means of % inch gypsum board or the equivalent applied to the garage means of % inch gypsum board or the equivalent applied to the garage means of % inch gypsum board or the garage means of % inch gypsum board or the garage means of % inch gypsum board or the gypsum board or the garage means of % inch gypsum board or the gypsum board or the garage means of % inch gypsum board or
	 garage side. (Chapter 4, Section 407.0 of the BOCA/1996) 9. All chimneys and vents shall be installed and maintained as per Chapter 12 of the City's Mechanical Code. (The BOCA National Mechanical Code) (100 Notes 10 Not
	Mechanical Code/1993). Chapter 12 & NFPA 211 10. Sound transmission control in residential building shall be done in accordance with Chapter 12, Section 1214.0 of the City's Building Code.
×	
	Headroom in babitable space is a minimum of 7'6" (Section 1204.0)
	 12. Inclusion in that a bit a final final of 76 (coccion 126 to) 13. Stair construction in <u>Use Group R-3 & R-4 is a minimum of 10" tread and 7 %" maximum rise</u>. All other Use Group minimum 11" tread, 7" maximum rise. (Section 1014.0)
	14. The minimum headroom in all parts of a stairway shall not be less than 80 inches. (6'8") 1014.4
	15. Every sleeping room below the fourth story in buildings of Use Groups R and I-1 shall have at least one operable window or exterior door approved for emergency egress or rescue. The units must be operable from the inside without the use of special knowledge or separate tools. Where windows are provided as means of egress or rescue they shall have a sill height not more than 44 inches (1118mm) above the floor. All egress or rescue windows from sleeping rooms shall have a minimum net clear opening height dimension of 24 inches (610mm). The minimum net clear opening width dimension shall be 20 inches (508mm), and a minimum net clear opening of 5.7 sq. ft.
	(Section 1018.6)

16. Each apartment shall have access to two (2) separate, remote and approved means of egress. A single exit is acceptable when it exits directly from the apartment to the building exterior with no communications to other apartment units. (Section 1010.1)

- 17. All vertical openings shall be enclosed with construction having a fire rating of at least one (1) hour, including fire doors with self closer's. (Over 3 stories in height requirements for fire rating is two (2) hours.) (Section 710.0) 18. The boiler shall be protected by enclosing with (1)hour fire rated construction including fire doors and ceiling, or by providing automatic extinguishment. (Table 302.1.1) 19. All single and multiple station smoke detectors shall be of an approved type and shall be installed in accordance with the provisions of the City's Building Code Chapter 9, Section 920.3.2 (BOCA National Building Code/1996), and NFPA 101 Chapter 18 & 19. (Smoke
 - detectors shall be installed and maintained at the following locations):
 - In the immediate vicinity of bedrooms
 - . In all bedrooms .

.

- In each story within a dwelling unit, including basements
- In addition to the required AC primary power source, required smoke detectors in occupancies in Use Groups R-2, R-3 and I-1 shall receive power from a battery when the AC primary power source is interrupted. (Interconnection is required) Section 920.3.2.
- A portable fire extinguisher shall be located as per NFPA #10. They shall bear the label of an approved agency and be of an approved 20. type. (Section 921.0)
- The Fire Alarm System shall maintained to NFPA #72 Standard. 21
- The Sprinkler System shall maintained to NFPA #13 Standard. 22.
- All exit signs, lights and means of egress lighting shall be done in accordance with Chapter 10 Section & Subsections 1023.0 & 1024.0 23. of the City's Building Code. (The BOCA National Building Code/1996)
- 24. Section 25-135 of the Municipal Code for the City of Portland states, "No person or utility shall be granted a permit to excavate or open any street or sidewalk from the time of November 15 of each year to April 15 of the following year".
- 25. The builder of a facility to which Section 4594-C of the Maine State Human Rights Act Title 5 MRSA refers, shall obtain a certification from a design professional that the plans commencing construction of the facility, the builder shall submit the certification the Division of Inspection Services.
- 26. Ventilation shall meet the requirements of Chapter 12 Sections 1210.0 of the City's Building Code. (Crawl spaces & attics).
- 27. All electrical, plumbing and HVAC permits must be obtained by a Master Licensed holders of their trade. No closing in of walls until all electrical (min.72 hours notice) and plumbing inspections have been done.
- All requirements must be met before a final Certificate of Occupancy is issued. 28.
- 29. All building elements shall meet the fastening schedule as per Table 2305.2 of the City's Building Code (the BOCA National Building Code/1996).
- 30. 31 32. 33. Ventilation of spaces within a building shall be done in accordance with the City's Mechanical Code (The BOCA National Mechanical Code/1993). (Chapter M-16) Please read and implement the attached Land Use Zoning report requirements They Extensor was Ferger. A Sep. review Boring, cutting and notching shall be done in accordance with Sections 2305.4.4, 2305.5.1 and 2305.5.3 of the City's Building Code.
 - Glass and glazing shall meet the requirements of Chapter 24 of the building code.
 - All signage, shall be done in accordance with Section 3102.0 signs of the City's Building Code, (The BOCA National Building Code

¥ 35.

30.

USE Graup F-1 and The Mer CanTile USE Group have a (3) Three hour Fire separation assembly between Two(2) hour IF a Fire suppression system is used The building. roughoul 37.

38.

Houses, Building Inspector Lt, McDougall, PFD

Marge Schmuckal, Zoning Administrator

Jung PSH 7/24/99

1996

**On the basis of plans submitted and conditions placed on these plans any deviations shall require a separate approval.