City of Portland, Maine - Building or Use Permit Application 389 Congress Street, 04101, Tel: (207) 874-8703, FAX: 874-8716 Location of Construction: Owner: Phone: Phone: Permit No: 7 0 4 1 6

	- A-D-				
Location of Construction:	Owner:	, Albert	Phone:		Permit Ng: 7 0 4 1 6
Owner Address:	Lessee/Buyer's Name:	E-Enchang	Phone: Busines		PERMIT ISSUED
Contractor Name:	Address:	141 9	Phone: 773-	-7575	Permit Issued:
Past Use:	Proposed Use:		COST OF WORK:	PERMIT FEE:	MAY - 7 1997
Retail	Hair Salon	* . •	FIRE DEPT. □ Approved □ Denied	\$ 25.00 INSPECTION: Use Group: Type:	Zone: CBL: 032-1-010
Proposed Project Description:			Signature: PEDESTRIAN ACTIVITIES	Signature:	Zoning Approval:
Change was			Action: Approved	with Conditions:	☐ Shoreland ☐ Wetland ☐ Flood Zone ☐ Subdivision
Permit Taken By:	Date Applied For:	01 %s	y 1997		☐ Site Plan maj ☐minor ☐mm ☐
 This permit application does not preclude to Building permits do not include plumbing Building permits are void if work is not station may invalidate a building permit and 	, septic or electrical work. arted within six (6) months of the d		ce. False informa-		☐ Variance ☐ Miscellaneous ☐ Conditional Use ☐ Interpretation ☐ Approved ☐ Denied
			WITH REG	T ISSUED WIREMENTS	Historic Preservation Not in District or Landmark Does Not Require Review Requires Review Action:
	CERTIFICATI	ION			□Appoved
I hereby certify that I am the owner of record of authorized by the owner to make this application if a permit for work described in the application areas covered by such permit at any reasonable	on as his authorized agent and I ag n is issued, I certify that the code o	gree to confo official's auth	rm to all applicable laws of the corized representative shall ha	is jurisdiction. In addition	□ Denied
	Lewso		01 May 1997	11 15.55	
SIGNATURE OF APPLICANT MARGEREE	ADDRESS:	3	DATE:	PHONE:	P (2 1) 2
RESPONSIBLE PERSON IN CHARGE OF WO	ORK, TITLE			PHONE:	CEO DISTRICT
Mhito	Pormit Dock Groon Assessor	r'e Canani	D DW Dink Dublic Eile	lyon Card Inchastor	4


City of Portland, Maine - Building or Use Permit Application 389 Congress Street, 04101, Tel: (207) 874-8703, FAX: 874-8716 Permit No: 9 Location of Construction: Owner: Phone: 34 Exchange St Palacci, Albert Owner Address: Lessee/Buyer's Name: Phone: BusinessName: Port Side Hair 34 Exchange St Ptld, ME 04101 Permit Issued: Contractor Name: Address: Phone: 773-7575 COST OF WORK: PERMIT FEE: Past Use: Proposed Use: 25.00 FIRE DEPT. Approved INSPECTION: Retail Hair Salon □ Denied Use Group: Type: Zone: CBL: 032-I-010 Signature: Proposed Project Description: PEDESTRIAN ACTIVITIES DISTRICT (P.A.D.) Action: Approved Approved with Conditions: ☐ Shoreland 50 Denied Change use ☐ Wetland ☐ Flood Zone □ Subdivision Signature: Date: ☐ Site Plan maj ☐mino Permit Taken By: Date Applied For: Mary Gresik 01 May 1997 Zoning Appeal ☐ Variance This permit application does not preclude the Applicant(s) from meeting applicable State and Federal rules. ☐ Miscellaneous 2. Building permits do not include plumbing, septic or electrical work. ☐ Conditional Use Building permits are void if work is not started within six (6) months of the date of issuance. False informa-☐ Interpretation □ Approved tion may invalidate a building permit and stop all work.. ☐ Denied Historic Preservation REGUE ☐ Not in District or Landmark ☐ Does Not Require Review ☐ Requires Review CERTIFICATION □ Approved DApproved with Conditions I hereby certify that I am the owner of record of the named property, or that the proposed work is authorized by the owner of record and that I have been □ Denied authorized by the owner to make this application as his authorized agent and I agree to conform to all applicable laws of this jurisdiction. In addition, if a permit for work described in the application is issued, I certify that the code official's authorized representative shall have the authority to enter all areas covered by such permit at any reasonable hour to enforce the provisions of the code(s) applicable to such permit Margaret Russo ADDRESS: DATE: PHONE:

White-Permit Desk Green-Assessor's Canary-D.P.W. Pink-Public File Ivory Card-Inspector

PHONE.

RESPONSIBLE PERSON IN CHARGE OF WORK, TITLE

A, Rowe

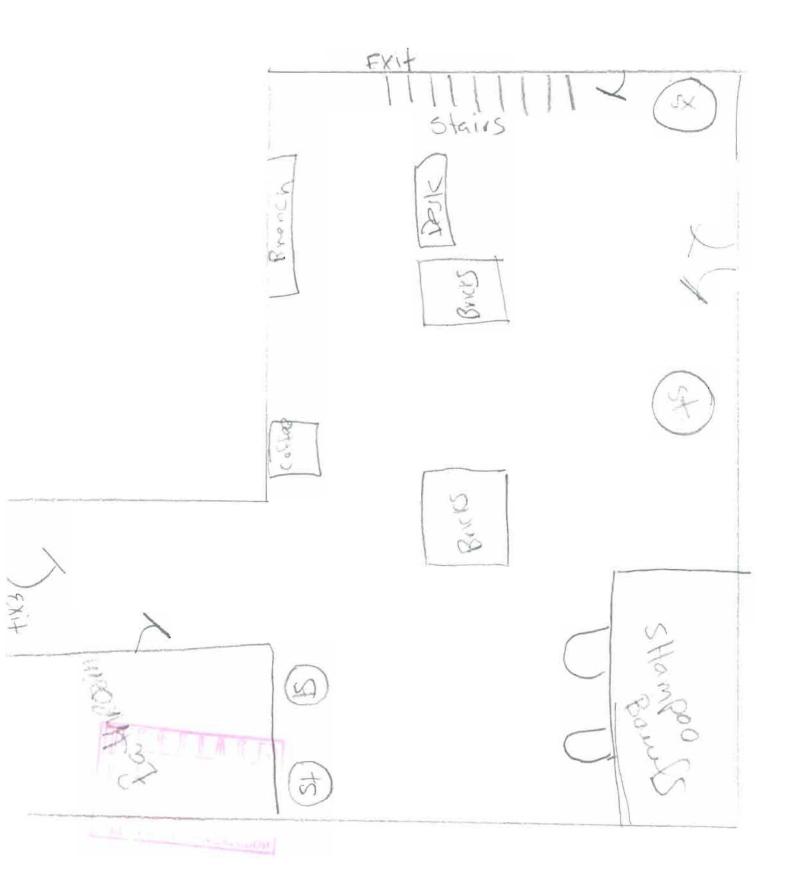

BUILDING PERMIT REPORT

DATE: 5/6/97	ADDRESS:	34 Exchange St.	
REASON FOR PERMIT:_	renovetions		
BUILDING OWNER:	Albert Palace.		
CONTRACTOR:			
PERMIT APPLICANT:	Morgant Risso APPRO	OVAL:	DENIED

CONDITION(S) OF APPROVAL

- 1. This permit does not excuse the applicant from meeting applicable State and Federal rules and laws.
- 2. Before concrete for foundation is placed, approvals from the Development Review Coordinator and Inspection Services must be obtained. (A 24 hour notice is required prior to inspection)
- 3. Precaution must be taken to protect concrete from freezing.
- 4. It is strongly recommended that a registered land surveyor check all foundation forms before concrete is placed. This is done to verify that the proper setbacks are maintained.
- 5. Private garages located beneath habitable rooms in occupancies in Use Group R-1, R-2, R-3 or I-1 shall be separated from adjacent interior spaces by fire partitions and floor/ceiling assembly which are constructed with not less than I-hour fire resisting rating. Private garages attached side-by-side to rooms in the above occupancies shall be completely separated from the interior spaces and the attic area by means of ½ inch gypsum board or the equivalent applied to the garage means of ½ inch gypsum board or the equivalent applied to the garage side. (Chapter 4 Section 407.0 of the BOCA/1996)
- 6. All chimneys and vents shall be installed and maintained as per Chapter 12 of the City's Mechanical Code. (The BOCA National Mechanical Code/1993) U.L. 103.
- 7. Guardrail & Handrails A guardrail system is a system of building components located near the open sides of elevated walking surfaces for the purpose of minimizing the possibility of an accidental fall from the walking surface to the lower level. Minimum height all Use Groups 42", except Use Group R which is 36". In occupancies in Use Group A, B, H-4, I-1. I-2 M and R and public garages and open parking structures, open guards shall have balusters or be of solid material such that a sphere with a diameter of 4" cannot pass through any opening. Guards shall not have an ornamental pattern that would provide a ladder effect.
- 8. Headroom in habitable space is a minimum of 7'6".
- 9. Stair construction in Use Group R-3 & R-4 is a minimum of 10" tread and 7 3/4" maximum rise. All other Use group minimum 11" tread. 7" maximum rise.
- 10. The minimum headroom in all parts of a stairway shall not be less than 80 inches.
- Every sleeping room below the fourth story in buildings of use Groups R and I-1 shall have at least one operable window or exterior door approved for emergency egress or rescue. The units must be operable from the inside without the use of special knowledge or separate tools. Where windows are provided as means of egress or rescue they shall have a sill height not more than 44 inches (1118mm) above the floor. All egress or rescue windows from sleeping rooms shall have a minimum net clear opening height dimension of 24 inches (610nm). The minimum net clear opening width dimension shall be 20 inches (508mm), and a minimum net clear opening of 5.7 sq. ft.
- 12. Each apartment shall have access to two (2) separate, remote and approved means of egress. A single exit is acceptable when it exits directly from the apartment to the building exterior with no communications to other apartment units.
- 13. All vertical openings shall be enclosed with construction having a fire rating of at lest one (1)hour, including fire doors with self closer's.
- 14. The boiler shall be protected by enclosing with (1) hour fire-rated construction including fire doors and ceiling, or by providing automatic extinguishment.
- 15. All single and multiple station smoke detectors shall be of an approved type and shall be installed in accordance with the provisions of the City's Building Code Chapter 9, Section 19, 920.3.2 (BOCA National Building Code/1996), and NFPA 101 Chapter 18 & 19 (Smoke detectors shall be installed and maintained at the following locations):
 - In the immediate vicinity of bedrooms
 - In all bedrooms
 - In each story within a dwelling unit, including basements

In addition to the required AC primary power source, required smoke detectors in occupancies in Use Groups R-2, R-3 and I-1 shall receive power from a battery when the AC primary power source is interrupted. (Interconnection is required)

(16.)	A portable fire extinguisher shall be located as per NFPA #10. They shall bear the label of an approved agency and be of an approved type.
	The Fire Alarm System shall be maintained to NFPA #72 Standard.
(18)	The Sprinkler System shall maintained to NFPA #13 Standard.
(9)	All exit signs, lights, and means of egress lighting shall be done in accordance with Chapter 10 Section & Subsections
	1023. & 1024. Of the City's building code. (The BOCA National Building Code/1996)
20.	All construction and demolition debris must be disposed at the City's authorized reclamation site. The fee rate is attached.
20,	Proof of such disposal must be furnished to the office of Inspection Services before final Certificate of Occupancy is issued
	or demolition permit is granted.
21.	Section 25-135 of the Municipal Code for the City of Portland states, "No person or utility shall be granted a permit to
	excavate or open any street or sidewalk from the time of November 15 of each year to April 15 of the following year".
22.	The builder of a facility to which Section 4594-C of the Maine State Human Rights Act Title 5 MRSA refers, shall obtain a
	certification from a design professional that the plans commencing construction of the facility, the builder shall submit the
	certification to the Division of Inspection Services.
23.	This permit does not excuse the applicant from obtaining any license which may be needed from the City Clerk's office.
24.	Ventilation shall meet the requirements of Chapter 12 Sections 1210, of the City's Building Code.
25.	All electrical and plumbing permits must be obtained by a Master Licensed holders of their trade.
× 26.	Separate permit will be required for signage
X 27.	Any exterior alterations ussociated with change of Use includ.
	Ing Signage must have distoric review.
28.	
	/- H
50/	
P. Sam	Horises, Lef of Code Enforcement
1/20/	Ma Named I Her
2	McDougall, PFD ge Schmuckal
Mai	ge Schillidekal
× H.	MMD.
× D.	Andrews HI?

BUILDING PERMIT REPORT

DATE: 5/6/97	AE	DDRESS: 3	Exchange	<u></u>	
REASON FOR PERMIT:	renovation	<u> </u>			
BUILDING OWNER:	Albert Palac	co.			
CONTRACTOR:					
PERMIT APPLICANT:	Margaret Risso	APPROVAL:	~		DENIED


CONDITION(S) OF APPROVAL

- 1. This permit does not excuse the applicant from meeting applicable State and Federal rules and laws.
- 2. Before concrete for foundation is placed, approvals from the Development Review Coordinator and Inspection Services must be obtained. (A 24 hour notice is required prior to inspection)
- Precaution must be taken to protect concrete from freezing.
- 4. It is strongly recommended that a registered land surveyor check all foundation forms before concrete is placed. This is done to verify that the proper setbacks are maintained.
- 5. Private garages located beneath habitable rooms in occupancies in Use Group R-1, R-2, R-3 or 1-1 shall be separated from adjacent interior spaces by fire partitions and floor/ceiling assembly which are constructed with not less than 1-hour fire resisting rating. Private garages attached side-by-side to rooms in the above occupancies shall be completely separated from the interior spaces and the attic area by means of ½ inch gypsum board or the equivalent applied to the garage means of ½ inch gypsum board or the equivalent applied to the garage side. (Chapter 4 Section 407.0 of the BOCA/1996)
- All chimneys and vents shall be installed and maintained as per Chapter 12 of the City's Mechanical Code. (The BOCA National Mechanical Code/1993) U.L. 103.
- Guardrail & Handrails A guardrail system is a system of building components located near the open sides of elevated walking surfaces for the purpose of minimizing the possibility of an accidental fall from the walking surface to the lower level. Minimum height all Use Groups 42", except Use Group R which is 36". In occupancies in Use Group A, B, H-4, I-1. I-2 M and R and public garages and open parking structures, open guards shall have balusters or be of solid material such that a sphere with a diameter of 4" cannot pass through any opening. Guards shall not have an ornamental pattern that would provide a ladder effect.
- 8. Headroom in habitable space is a minimum of 7'6".
- 9. Stair construction in Use Group R-3 & R→ is a minimum of 10" tread and 7 3/4" maximum rise. All other Use group minimum 11" tread. 7" maximum rise.
- 10. The minimum headroom in all parts of a stairway shall not be less than 80 inches.
- Every sleeping room below the fourth story in buildings of use Groups R and I-1 shall have at least one operable window or exterior door approved for emergency egress or rescue. The units must be operable from the inside without the use of special knowledge or separate tools. Where windows are provided as means of egress or rescue they shall have a sill height not more than 44 inches (1118mm) above the floor. All egress or rescue windows from sleeping rooms shall have a minimum net clear opening height dimension of 24 inches (610mm). The minimum net clear opening width dimension shall be 20 inches (508mm), and a minimum net clear opening of 5.7 sq. ft.
- 12. Each apartment shall have access to two (2) separate, remote and approved means of egress. A single exit is acceptable when it exits directly from the apartment to the building exterior with no communications to other apartment units.
- 13. All vertical openings shall be enclosed with construction having a fire rating of at lest one (1)hour, including fire doors with self closer's.
- 14. The boiler shall be protected by enclosing with (1) hour fire-rated construction including fire doors and ceiling, or by providing automatic extinguishment.
- All single and multiple station smoke detectors shall be of an approved type and shall be installed in accordance with the provisions of the City's Building Code Chapter 9, Section 19, 920.3.2 (BOCA National Building Code/1996), and NFPA 101 Chapter 18 & 19. (Smoke detectors shall be installed and maintained at the following locations):
 - In the immediate vicinity of bedrooms
 - In all bedrooms
 - In each story within a dwelling unit, including basements

In addition to the required AC primary power source, required stroke detectors in occupancies in Use Groups R-2, R-3 and I-1 shall receive power from a battery when the AC primary power source is interrupted. (Interconnection is required)

(16.)	A portable fire extinguisher shall be located as per NFPA #10. They shall bear the label of an approved agency and be of approved type.	an
(12)	The Fire Alarm System shall be maintained to NFPA #72 Standard.	
(13)	The Sprinkler System shall maintained to NFPA #13 Standard.	
(19)	All exit signs, lights, and means of egress lighting shall be done in accordance with Chapter 10 Section & Subsections 1023. & 1024. Of the City's building code. (The BOCA National Building Code/1996)	
20.	All construction and demolition debris must be disposed at the City's authorized reclamation site. The fee rate is attached Proof of such disposal must be furnished to the office of Inspection Services before final Certificate of Occupancy is issued or demolition permit is granted.	
21.	Section 25-135 of the Municipal Code for the City of Portland states, "No person or utility shall be granted a permit to excavate or open any street or sidewalk from the time of November 15 of each year to April 15 of the following year".	
22.	The builder of a facility to which Section 4594-C of the Maine State Human Rights Act Title 5 MRSA refers, shall obtain certification from a design professional that the plans commencing construction of the facility, the builder shall submit the certification to the Division of Inspection Services.	
23.	This permit does not excuse the applicant from obtaining any license which may be needed from the City Clerk's office.	
24.	Ventilation shall meet the requirements of Chapter 12 Sections 1210, of the City's Building Code.	
25.	All electrical and plumbing permits must be obtained by a Master Licensed holders of their trade.	
★ 26.	Separate permit will be required for Signage	
		- /
¥ 27.	Any exterior alterations associated with change of Use tra	<u>luc</u>
28.		
	1-Km	
50/		
P. Sam	wet Horises, Offer of Code Enforcement	
16		
	McDougall, PFD	
Mar	rge Schmuckal	
x H.	JM Sp	
V 0	Andrews HP?	
$\sim \nu$.	Andrews HI?	
-	<i>//</i>	

FXIT JX Stairs ANY Bronth Bricks Buch +1X3 C SHampson S 3







CITY OF PORTLAND, MAINE Department of Building Inspection

LOCATION

Certificate	of	Occupancy
TO CAMTON		

Issued	to	ATI	news.	Pal	ared

Date of Issue

34 Exclimes St

This is to certify that the building, premises, or part thereof, at the above location, built - altered changed as to use under Building Permit No. 970416 , has had final inspection, has been found to conform substantially to requirements of Zoning Ordinance and Building Code of the City, and is hereby approved for occupancy or use, limited or otherwise, as indicated below.

PORTION OF BUILDING OR PREMISES

APPROVED OCCUPANCY



Rair Salon

Limiting Conditions:

This certificate supersedes certificate issued

Approved:

(Date)

Inspector

Inspector of Buildings

Notice: This certificate identifies lawful use of building or premises, and ought to be transferred from owner to owner when property changes hands. Copy will be furnished to owner or lessee for one dollar.