


GENERAL NOTES


1. UNLESS OTHERWISE NOTED, ALL DIMENSIONS INDICATED ARE TO THE FACE OR CENTERLINE UNLESS OTHERWISE NOTED.
2. ALL INTERIOR WALLS ARE TO BE UIC WALL, TYPE UNLESS OTHERWISE NOTED.
3. ALL EXTERIOR WALLS ARE TO BE BU-A UNLESS OTHERWISE NOTED.
4. MR. GYPSUM BOARD SHALL BE USED THROUGHOUT TOILET ROOM AND SHOWER BAY. LOCATIONS EXCEPT WHERE BACKER BOARD IS REQUIRED, THE BACKER BOARD IS REQUIRED AT ALL LOCATIONS WHERE TILE IS LOCATED AS SHOWN.
5. REFER TO 4.6 FOR FIRE RESISTANCE RATINGS FOR WALLS, FLOORS, AND ROOF ASSEMBLIES.
6. REFER TO UL LISTINGS FOR PIPE AND DUCT PENETRATIONS IN RATED WALLS.
7. REFER TO 4.6 FOR DOOR TYPES AND DOOR FRAME TYPES.
8. REFER TO 4.6 FOR WINDOW TYPES.
9. REFER TO 4.6 FOR WINDOW TYPES.
10. BLOCKING SHALL BE ADEQUATE TO PREVENT SUPPORT GRAB BARS INSTALLED AS INDICATED IN TYPICAL ACCESSIBILITY GUIDELINES AND DIMENSIONS USING A LOAD STANDARD OF 250 LBS. STATIC.
11. ALL 2 HR FIRE RATED WALLS SHALL BE CONTINUOUS IN PLAN AND VERTICAL THROUGHOUT ONE HOUR OR NON-RATED ASSEMBLY SHALL NOT BE USED.
12. ALL FURNISHING FIXTURES SHALL BE SEALED TO ADJACENT MATERIALS WITH APPROPRIATE SEALANT.
13. FE DENOTES FIRE EXTINGUISHER, FEC DENOTES A FIRE EXTINGUISHER CABINET, FEV.C. DENOTES A FIRE EXTINGUISHER VALVE CABINET, FEV.C. DENOTES A FIRE EXTINGUISHER ROBE CABINET, V.C. DENOTES A VALVE CABINET, F.H.C. DENOTES A FIRE HOSE CABINET, F.H.C. DENOTES A FIRE HOSE CABINET, F.H.C. DENOTES A FIRE HOSE CABINET, F.H.C. DENOTES A FIRE HOSE CABINET.
14. C.U. DENOTES A CONTROL UNIT, REFER TO STRUCTURAL DRAWINGS FOR CONSTRUCTION JOINT LOCATION AND DETAILS.
15. PARKING GARAGE STRUCTURE IS TO BE A PRECAST CONCRETE UNIT FACILITY DESIGN BUILT BY OTHERS, REFER TO STRUCTURAL DRAWINGS FOR ADDITIONAL INFORMATION.
16. REFER TO GEO/TECHNICAL REPORT FOR ADDITIONAL SOIL INFORMATION.

Permit Set

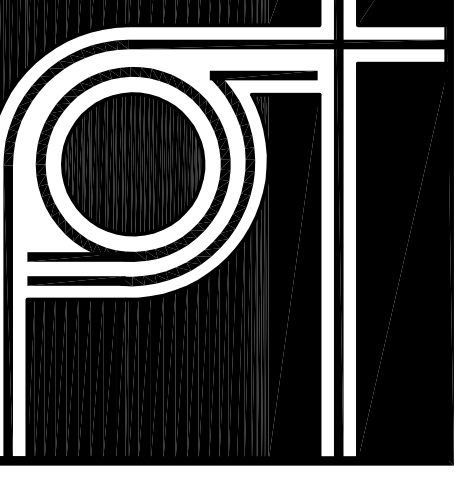

THA
ARCHITECTS, LLC
ARCHITECTURE DESIGN PLANNING INTERIOR DESIGN
105 WILLLOW BROOK AVENUE
SOUTHAMPTON, NEW HAMPSHIRE 03885
Tel: (603) 770-2491 Fax: (603) 773-0288
www.thaarc.com

These drawings and specifications were prepared for use at the location indicated. Publication and use in any other location without the written permission of THA Architects, LLC.
© 2016 THA Architects, LLC.

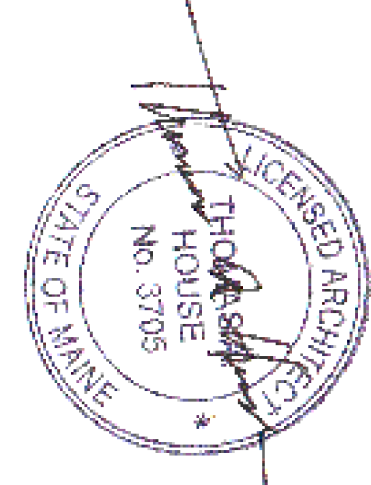

midtown Portland

Somerset Street
Elm Street
Portland, ME

Building 2
Level Five
Floor Plan

Structural Engineer
Becker Engineering
MEP Engineer
McCabe & Associates
FP Engineer
McCabe & Associates

SCALE:
ISSUED / DRAWN BY
February 8, 2016
REVISED / REVISED BY
April 15, 2016

JOB NO.: 15001
SHEET NUMBER

A-1.5